20 Foot Stock Production Trailers

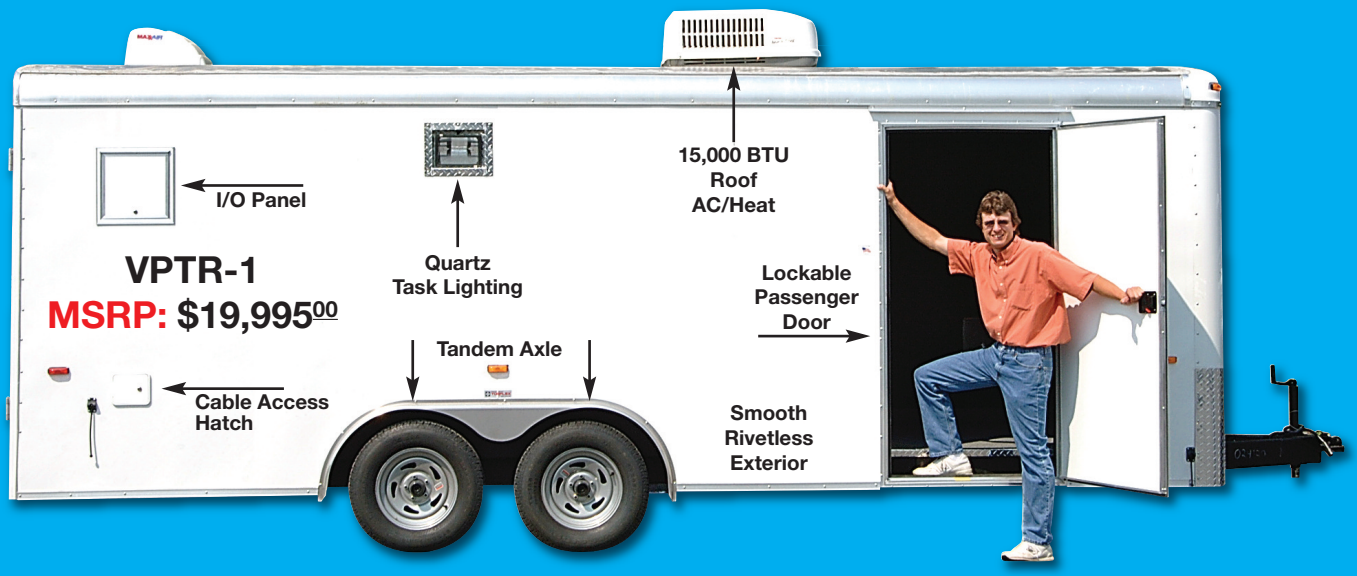

Fully Finished Inside and Out • Heat & AC • 5 Racks • Console • I/O Panel
Carpeted • Track Lighting • Breaker Panel w/Generator Input • Tows w/SUV

VPTR-1 20 Foot Model Standard Features

- Dexter Torflex Twin Axles (2x 3500 Lb.)
- 20 Foot x 8.5 Foot
- White Aluminum Exterior (Colors Available)
- Generous 80" Interior Head Room
- 1 Motorized Roof Vent w/Rain Guard
- Finished Laminate Ceiling w/ Lighting
- 8 Ft. Console Table
- Dual Rear Stabilizers
- 3,000+ Lbs. of Extra Gear Carrying Capacity
- Rear Bogey/Skate Wheel "Bottom Out" Protection
- E-Z Lube Hubs w/ Grease Zerks
- Premium Radial Tires & Gray Mods
- 15,000 BTU Roof AC Unit with Heat Strip
- 36" Lockable Passenger Door
- 40" Lockable Rear Door
- 4 Lockable Cable I/O Doors
- Grey Industrial Carpeted Walls & Floors
- Five 19" Racks (37RU Per Rack)
- Optional Observation Deck Available

VPTR-1 Specifications

OVERALL LENGTH:	23'-10"
OVERALL WIDTH:	102"
OVERALL HEIGHT:	106"
INTERIOR LENGTH:	19'-11"
INTERIOR WIDTH:	98"
INTERIOR HEIGHT:	80"
AXLE DESIGN:	DUAL TANDEM
HITCH BALL SIZE:	2 5/16
USABLE RU ABOVE COUNTER:	18RU(x5)
USABLE RU BELOW COUNTER:	#1: 7RU #2-4: 13RU #5: 6RU
MAIN COUNTER TOP SIZE:	8' x 24"

ELECTRICAL CAPACITY AT PANEL:
220/30AMPS Single Phase • 15 Amps per leg

Additional Payload Capacity By Axle Size:

(Standard/Stock)		
	3500	3000 Lbs. Approx.
	5200	6500 Lbs. Approx.
	6000	8000 Lbs. Approx.
	7000	10,000 Lbs. Approx.
	8000	12,000 Lbs. Approx.

Note: Weights based on absolute maximum gross weights. Please include the racks, furniture and equipment to calculate the maximum cargo/payload deployed weight. It MUST not exceed the axle payload number.

Options: Custom Builds & colors are available. Speak to a customer service representatives for more details.

markertek.com®

www.markertek.com • 800-522-2025 • Fax: 845-246-1757 • e-mail: sales@markertek.com

© Tower Products, Incorporated. Specifications & features subject to change without notice.