


20 Foot Stock Production Trailers

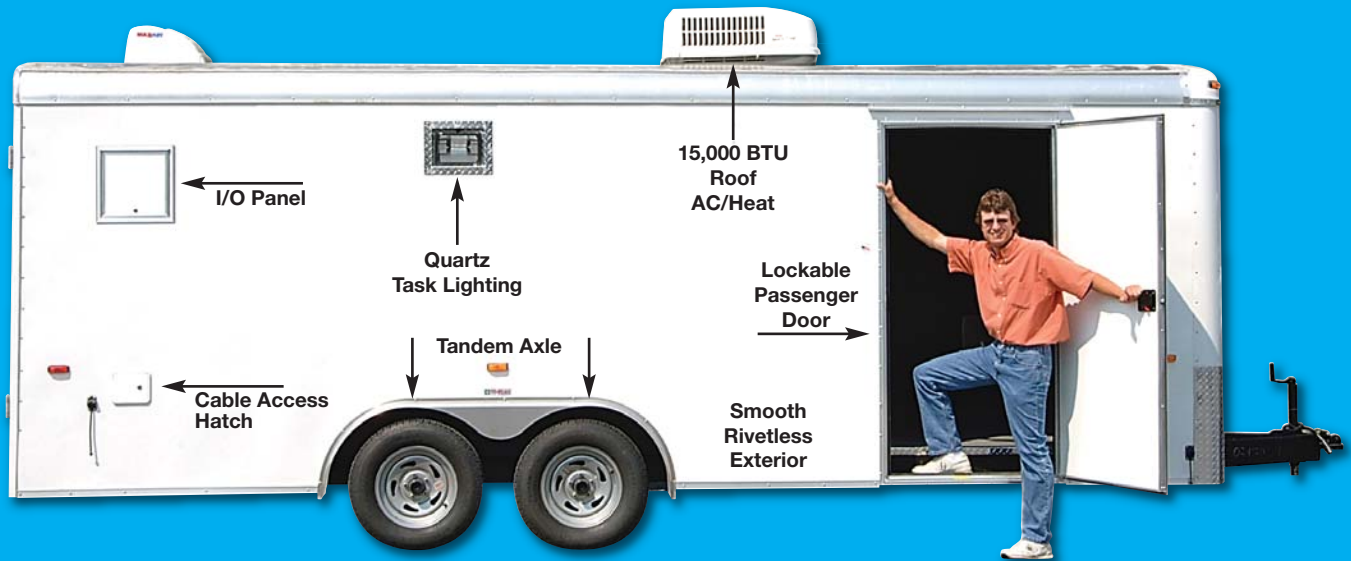

**Fully Finished Inside and Out • Heat & AC • 5 Racks • Console • I/O Panel
Carpeted • Track Lighting • Breaker Panel w/Generator Input • Tows w/SUV**

VPTR-1 20 Foot Model Standard Features

Dexter Torflex Twin Axles (2x 3500 Lb.)
20 Foot x 8.5 Foot
White Aluminum Exterior (Colors Available)
Generous 80" Interior Head Room
1 Motorized Roof Vent w/Rain Guard
Finished Laminate Ceiling w/ Lighting
8 Ft. Console Table
Dual Rear Stabilizers
3,000+ Lbs. of Extra Gear Carrying Capacity

E-Z Lube Hubs w/ Grease Zerks
Premium Radial Tires & Gray Mods
15,000 BTU Roof AC Unit with Heat Strip
36" Lockable Passenger Door
40" Lockable Rear Door
4 Lockable Cable I/O Doors
Grey Industrial Carpeted Walls & Floors
Insulated Walls
Five 19" Racks (37RU Per Rack)

VPTR-1 Specifications

OVERALL LENGTH: 23'-10"
OVERALL WIDTH: 102"
OVERALL HEIGHT: 106"
INTERIOR LENGTH: 19'-11"
INTERIOR WIDTH: 98"
INTERIOR HEIGHT: 80"
AXLE DESIGN: DUAL TANDEM
HITCH BALL SIZE: 2 5/16
USABLE RU ABOVE COUNTER: 18RU(x5)
USABLE RU BELOW COUNTER: #1: 7RU
#2-4: 13RU
#5: 6RU
MAIN COUNTER TOP SIZE: 8' x 24"

ELECTRICAL CAPACITY AT PANEL:
220/50AMPS Single Phase • 25 Amps per leg

Additional Payload Capacity By Axle Size:
(Standard/Stock)

3500	3000 Lbs. Approx.
5200	6500 Lbs. Approx.
6000	8000 Lbs. Approx.
7000	10,000 Lbs. Approx.
8000	12,000 Lbs. Approx.

Note: Weights based on absolute maximum gross weights. Please include the racks, furniture and equipment to calculate the maximum cargo/payload deployed weight. It MUST not exceed the axle payload number.

Options: Custom Builds & colors are available. Speak to a customer service representatives for more details.

markertek.com[®]

www.markertek.com • 800-522-2025 • Fax: 845-246-1757 • e-mail: sales@markertek.com