


24 Foot Stock Production Trailers

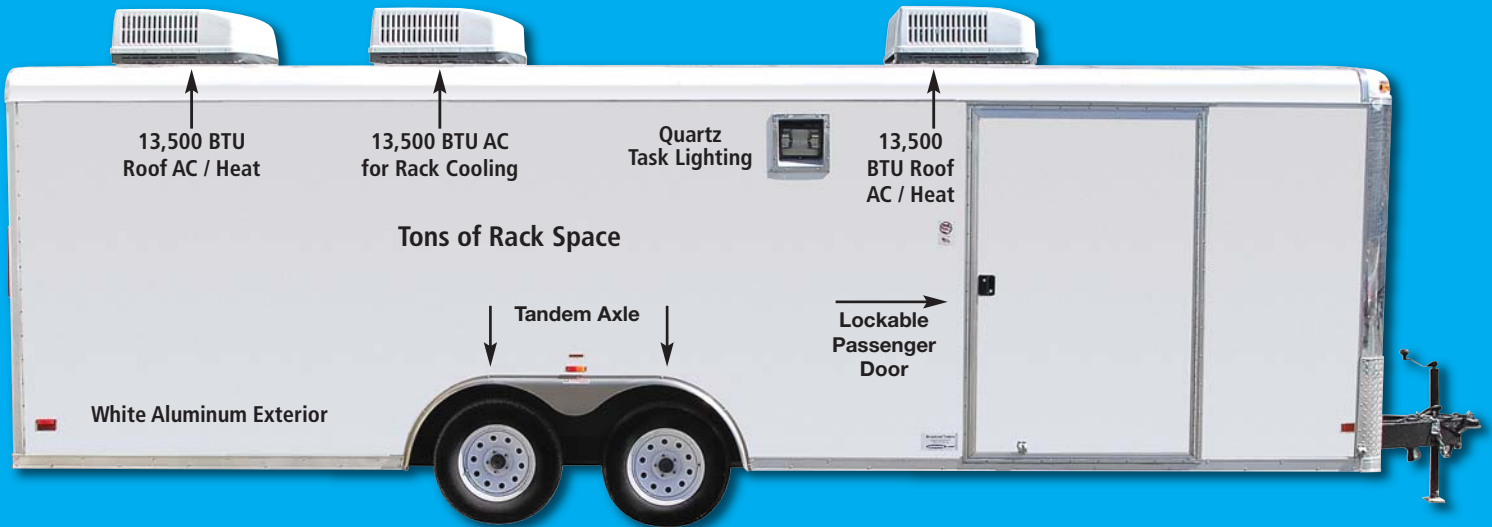

**Fully Finished Inside & Out • Dual Suite - 1-Front / 1-Rear • Heat & AC • 6 Racks
• Console • I/O Panel • Carpeted • Track Lighting • Breaker Panel w/Generator Input**

VPTR-24 Standard Features • 24 Foot Dual Suite Model

Dexter Torflex Twin Axles (2x 5,200 Lb.)
24 Foot x 8.5 Foot
White Aluminum Exterior (Colors Available)
Climate Controlled
Insulated Walls
Generous 80" Interior Head Room
2 Separate Locking Suites
Deluxe 'Control Room' Interior
Dual Rear Stabilizer Jacks
Rear Bogey/Skate Wheel "Bottom Out" Protection

E-Z Lube Hubs w/ Grease Zerks
Premium Radial Tires & Gray Mods
2x 13,500 BTU Roof AC / Heat Strip Units
1x 13,500 BTU Equipment Rack AC Unit
36" Lockable Passenger Door
40" Lockable Rear Door
Six 19" Racks @ 37RU & Two @7RU
Breaker Box w/ Generator Input
I/O Panel & Cable Hatches
Tows Easily With any Class 3 Hitch

VPTR-24 Specifications

OVERALL LENGTH: 27'-10"
OVERALL WIDTH: 102"
OVERALL HEIGHT: 106"
INTERIOR LENGTH: 23'-11"
INTERIOR WIDTH: 98"
INTERIOR HEIGHT: 80"
AXLE DESIGN: DUAL TANDEM
HITCH BALL SIZE: 2 5/16
USABLE RU ABOVE COUNTER: 18RU(x5)
USABLE RU BELOW COUNTER:
Forward: #1: 7RU • #2-4: 13RU • #5: 6RU
Aft: #6: 37RU • #7&8: 7RU

MAIN COUNTER TOP SIZE: 8' x 24"
WORK COUNTERS: Forward: 30" x 48" (2x)
Aft: 28" x 36" (1x)
ELECTRICAL CAPACITY AT PANEL:
220/60AMPS Single Phase • 30 AMPS per leg
Additional Payload Capacity By Axle:

(Standard/Stock)	5200	4600+ Lbs. Approx.
	6000	6500+ Lbs. Approx.
	7000	8500+ Lbs. Approx.
	8000	10500+ Lbs. Approx.

Note: Weights based on absolute maximum gross weights. Please include the racks, furniture and equipment to calculate the maximum cargo/payload deployed weight. It MUST not exceed the axle payload number.

Options: Custom Builds are available.

markertek.com®

www.markertek.com • 800-522-2025 • Fax: 845-246-1757 • e-mail: sales@markertek.com