


# Stock Production Trailers

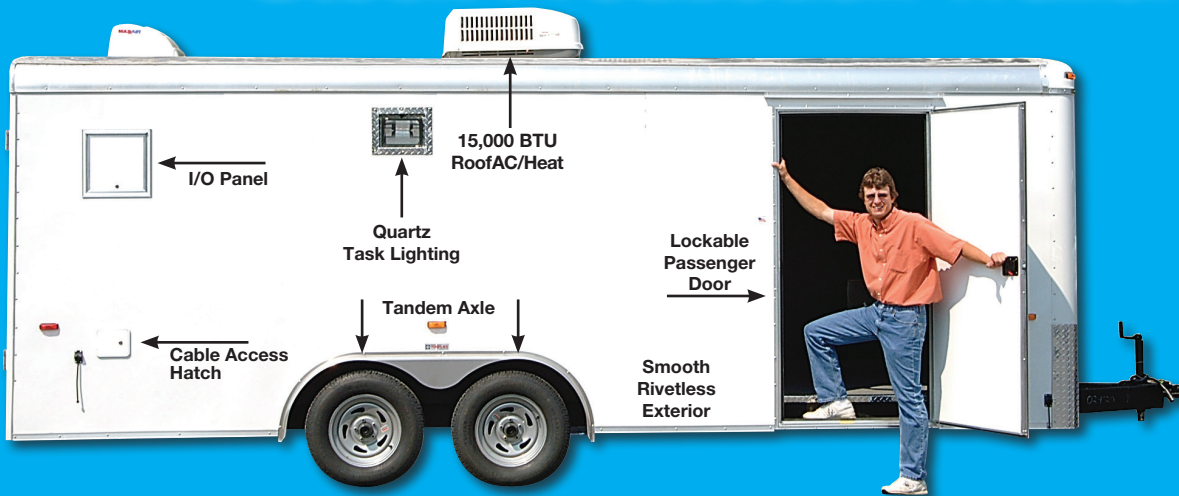

- Video Production
- Live Event Switching
- Edit Suite
- Pro-Tools Tracking
- Client Viewing Room
- Community Access
- Chyron Suite
- Effects Trailer
- Monitoring
- Command Center
- Producers Cabin
- Mobile Studio

**Fully Finished Inside and Out • Heat & AC • 5 Racks • Console • I/O Panel  
Carpeted • Track Lighting • Breaker Panel w/Generator Input • Tows w/SUV**

'Off-the-shelf' rack-ready 20 foot x 8.5 foot deluxe professional video and audio production trailer with a ceiling height of 6'6". It's a modern fully equipped outside broadcast (OB) vehicle heated and air conditioned and pre-wired with heavy duty electrical wiring.

Features a professional all white exterior and looks great parked outside or inside an arena, corporate meeting or media tours. It is also perfect for DVD production, webcasts, downstreaming, religious programming, or news/sports events. Also provides a low cost portable inside control room environments for professionals who need a quick and economical solution for productions close to the TV/shooting set. Cut/directing can be done simultaneously to the footage, needed for live transmissions or useful to minimize post production costs. Also ideally suited for TV studios and stations with a limited budget.

5 six foot high 19" EIA racks comprise the monitor-equipment wall. A laminated 8 foot wide console table sits in front of the rack wall for your switcher. There is even enough room to add a secondary audio desk, chairs, couches and cabinets.

The interior of the production trailer is carpeted and finished in a no-glare medium grey fabric. The cabin is heated and air conditioned for your comfort. The trailer is wired for AC shore power. Stylish and dimmable track lighting which can be upgraded to optional LED lighting. Outside quartz task lighting gives you the ability so safety pack up when the job is finished.

A 4 foot deep work room is accessed by a 40" swing-out door on the rear. This is also where you access the rear of your rack wall. A 50A AC service panel is installed for all your electrical needs

The extended 8.5 ft. width gives the user a true 8 ft. interior width. There is a 36" wide passenger door on the curb side of the unit.

Other production features include: 3 cable feed-thru hatch doors; A/V I/O panel standard setup includes popular Audio, Video, Data/Cat5 and Telco I/O options. High quality panel mount connections with Neutrik, Canare, Switchcraft and Tecnec connectors. I/O panel options can be customized to include Lemo, Neutrik and Canare SMPTE, OpticalCON and Tactical connections

Trailers save you thousands of dollars compared to the cost of motor home models, vans and OB trucks that require costly yearly maintenance and never seem to want to start when you need them. Trailers can also be pulled by many different tow vehicles thus freeing up the tow vehicle for other assignments after the production trailer has been placed.



**5 Racks & Console**



**I/O Panel**

**Stock  
TRAILERS**

**BUILT  
IN-HOUSE**  
By Our  
Mobile Video  
Department


VPTR-1 shown with Optional Fold-Down Shooting Deck



## 2 Stock Models

VPTR-24 • 24 Ft.

VPTR-1 • 20 Ft.

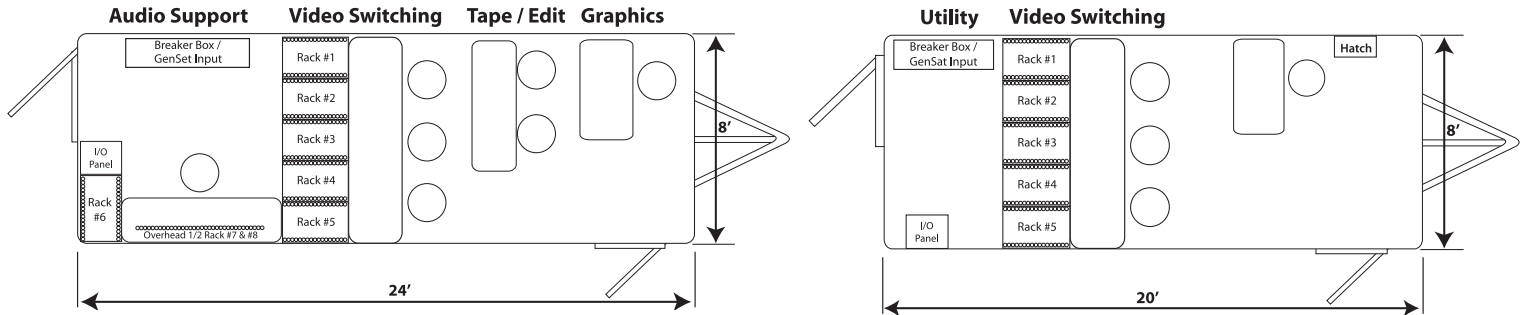

### VPTR-1 Specifications

**OVERALL LENGTH:** 23'-10"  
**OVERALL WIDTH:** 102"  
**OVERALL HEIGHT:** 106"  
**INTERIOR LENGTH:** 19'-11"  
**INTERIOR WIDTH:** 98"  
**INTERIOR HEIGHT:** 80"  
**AXLE DESIGN:** DUAL TANDEM  
**HITCH BALL SIZE:** 2 5/16  
**USABLE RU ABOVE COUNTER:** 18RU(x5)  
**USABLE RU BELOW COUNTER:** #1: 7RU  
 #2-4: 13RU  
 #5: 6RU  
**MAIN COUNTER TOP SIZE:** 8' x 24"

**ELECTRICAL CAPACITY AT PANEL:**  
 220/50AMPS Single Phase • 25 Amps per leg

**Additional Payload Capacity By Axle Size:**  
 (Standard/Stock x2): 3500/3000 Lbs. Approx.

**Optional Axles:**  
 5200/6500 Lbs. Approx.  
 6000/8000 Lbs. Approx.  
 7000/10,000 Lbs. Approx.  
 8000/12,000 Lbs. Approx.

**Note:** Weights based on absolute maximum gross weights. Please include the racks, furniture and equipment to calculate the maximum cargo/payload deployed weight. It MUST not exceed the axle payload number.

**Options:** Custom Builds & colors are available. Speak to a customer service representatives for more details.

### VPTR-24 Specifications

**OVERALL LENGTH:** 27'-10"  
**OVERALL WIDTH:** 102"  
**OVERALL HEIGHT:** 106"  
**INTERIOR LENGTH:** 23'-11"  
**INTERIOR WIDTH:** 98"  
**INTERIOR HEIGHT:** 80"  
**AXLE DESIGN:** DUAL TANDEM  
**HITCH BALL SIZE:** 2 5/16  
**USABLE RU ABOVE COUNTER:** 18RU(x5)  
**USABLE RU BELOW COUNTER:**  
 Forward: #1: 7RU • #2-4: 13RU • #5: 6RU  
 Aft: #6: 37RU • #7&8: 7RU  
**MAIN COUNTER TOP SIZE:** 8' x 24"  
**WORK COUNTERS:** Forward: 30" x 48" (2x)  
 Aft: 28" x 36" (1x)

**ELECTRICAL CAPACITY AT PANEL:**  
 220/60AMPS Single Phase • 30 AMPS per leg


**Additional Payload Capacity By Axle:**  
 (Standard/Stock x2): 5200/4600+ Lbs. Approx.

**Optional Axles Avail.**  
 6000/6500+ Lbs. Approx.  
 7000/8500+ Lbs. Approx.  
 8000/10500+ Lbs. Approx.

**Note:** Weights based on absolute maximum gross weights. Please include the racks, furniture and equipment to calculate the maximum cargo/payload deployed weight. It MUST not exceed the axle payload number.

**Options:** Custom Builds are available.

# 100 AMP SUB PANEL

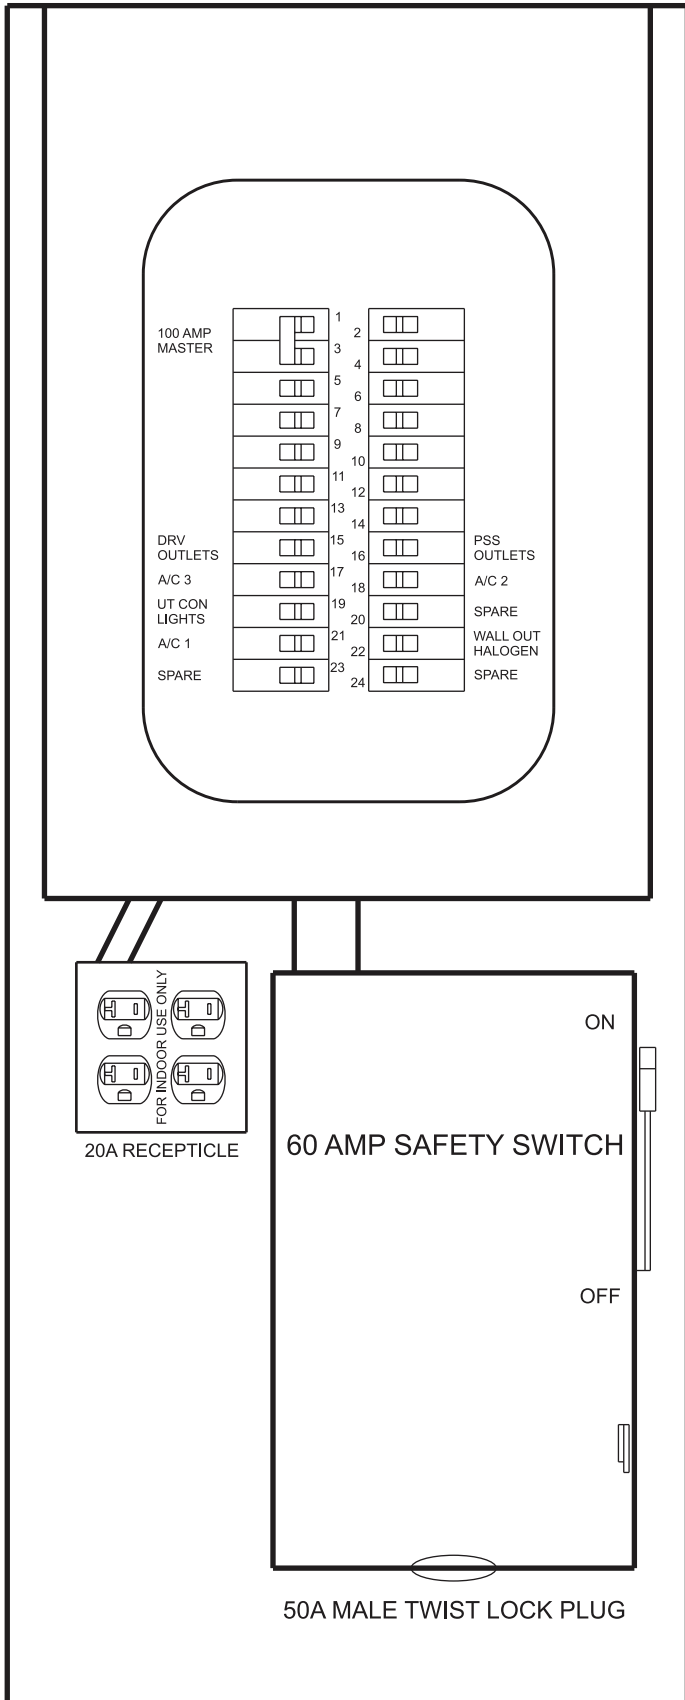

## VPTR-1 20 Foot Model Standard Features

- 20 Foot x 8.5 Foot
- Fully Insulated Walls & Ceiling
- White Aluminum Rivetless Exterior (Colors Available)
- Grey Industrial Carpeted Walls & Floors
- Generous 80" Interior Head Room
- 15,000 BTU Roof AC Unit with Heat Strip
- 1 Motorized Roof Vent w/Rain Guard
- 36" Lockable Passenger Door
- Finished Laminate Ceiling w/Lighting
- 40" Lockable Rear Door
- 8 Ft. Console Table
- 4 Ft. Producer's Console Table
- 4 Lockable Cable I/O Hatches
- Dexter Torflex Twin Axles (2x 3500 Lb.)
- Premium Radial Tires & Gray Mods
- 3,000+ Lbs. of Extra Gear Carrying Capacity
- Five 19" Racks (37RU Per Rack)
- Rear Bogey/Skate Wheel "Bottom Out" Protection
- Aluminum Pull-Out Steps
- Dual Rear Stabilizers
- Exterior Quartz Light
- Bright Front Corners - ATP Stoneguard
- Observation Deck Available

## VPTR-24 24 Foot Model Standard Features

- Dexter Torflex Twin Axles (2x 5,200 Lb.)
- Fully Insulated Walls & Ceiling
- 24 Foot x 8.5 Foot
- Premium Radial Tires & Gray Mods
- White Aluminum Rivetless Exterior (Colors Available)
- 2x 13,500 BTU Roof AC / Heat Strip Units
- Climate Controlled
- 1x 13,500 BTU Equipment Rack AC Unit
- Insulated Walls
- 36" Lockable Passenger Door
- Generous 80" Interior Head Room
- 40" Lockable Rear Door
- 2 Separate Locking Suites
- Six 19" Racks @ 37RU & Two @7RU
- Deluxe 'Control Room' Interior
- Breaker Box w/ Generator Input
- Dual Rear Stabilizer Jacks
- I/O Panel & Cable Hatches
- Rear Bogey/Skate Wheel "Bottom Out" Protection
- Tows Easily With any Class 3 Hitch
- Exterior Quartz Light
- Optional Spare Tires Available