

# FA42T-6MB


## Strategy II 4" "Motor Board" Assembly

1. Install Enclosure Per Instructions Provided. Extend Service Loop at Least 6" Beyond Bottom Lip of Enclosure
2. Terminate Service Loop to Red & Black Leads on Motorboard
3. Install Motorboard Into Enclosure with Screws Provided
4. Select Wattage Tap Via Front Selector Switch
5. Install Original FA Series Grille

### FA42T-6MB

**Frequency Response:** 70Hz - 20kHz

**Sensitivity:** 88dB (1W/1M)

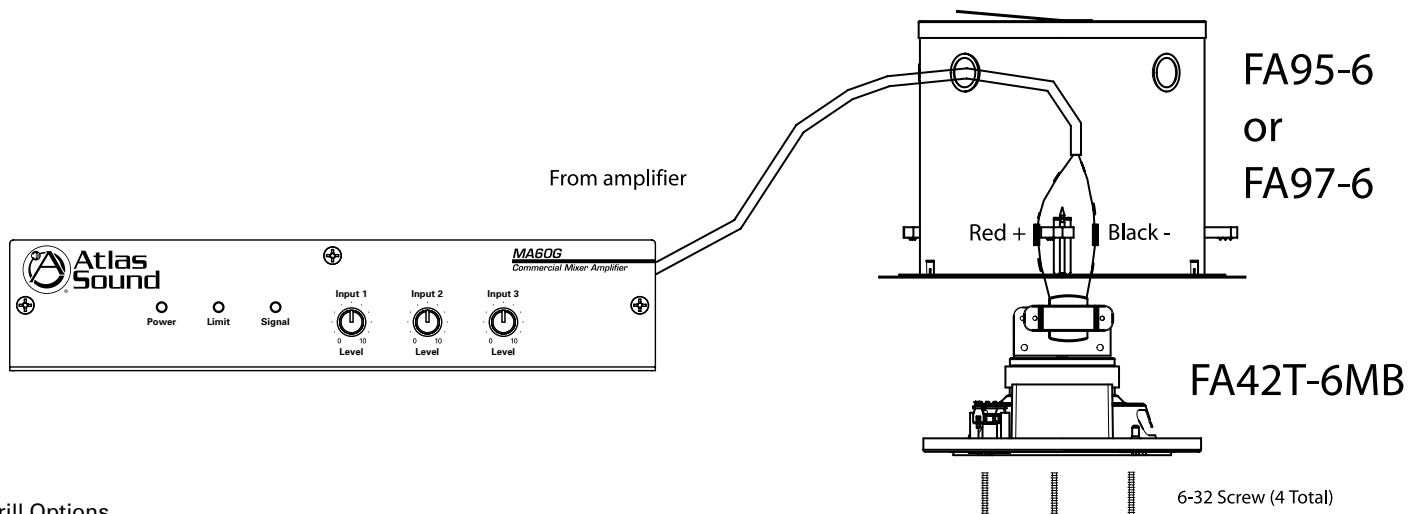

#### Grill Options

|         |        |
|---------|--------|
| FA51-6  | Round  |
| FA170-6 | Round  |
| FA720-6 | Round  |
| FA730-6 | Square |