

Microflex[®]

SHURE[®]

MX396 Dual & Tri-Element Microphones

MICROPHONES À ÉLÉMENTS DOUBLES ET TRIPLES MX396

MIKROFONE MX396 MIT ZWEI UND DREI KAPSELN

MICROFONOS MX396 DE DOS Y TRES ELEMENTOS


MICROFONI A DUE E TRE ELEMENTI MX396

Microfone de Superfície com Vários Elementos

ДВУХ- И ТРЕХЭЛЕМЕНТНЫЕ МИКРОФОНЫ MX396

MX396 デュアル & トライエレメントマイクロホン

MX396 两单元和三单元话筒

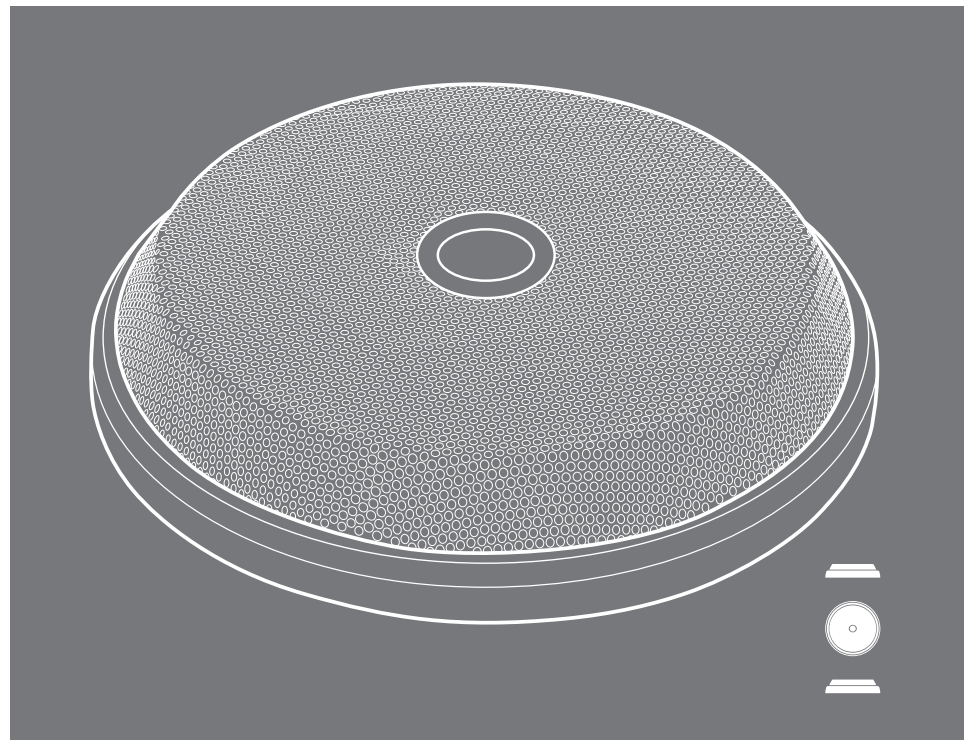

© 2013 Shure Incorporated
27A21441 (Rev. 1)



Multi-Element Boundary Microphone

General Description





Shure MX396 Dual-Element and Tri-Element microphones provide full coverage of large tables with fewer microphones, and feature a low profile design. This makes them ideal for use in boardrooms and other installations where aesthetics are important.

Features

- Low profile, aesthetic design
- Wide dynamic range and smooth frequency response
- Configurable mute switch with logic output
- Logic input for external LED control
- RF filtering with CommShield® technology


Placement

Important: Align the Shure logo as shown for proper coverage.

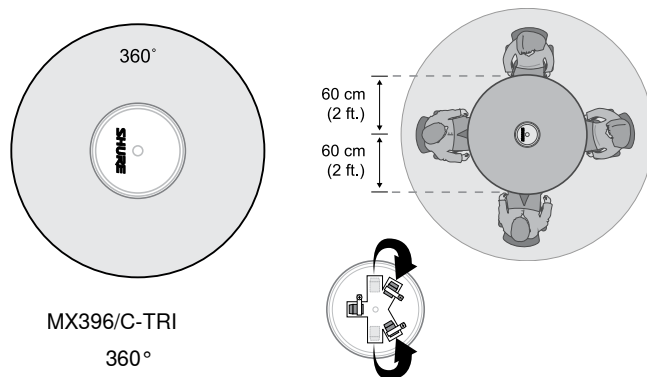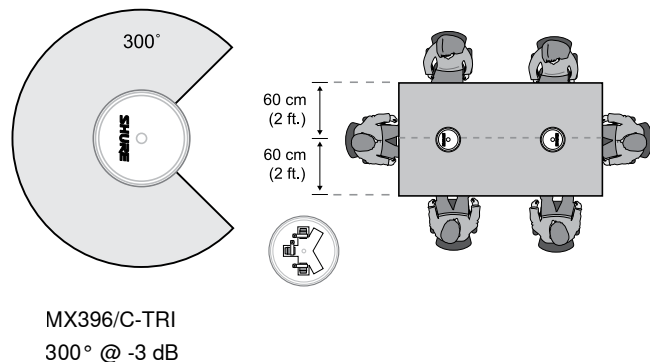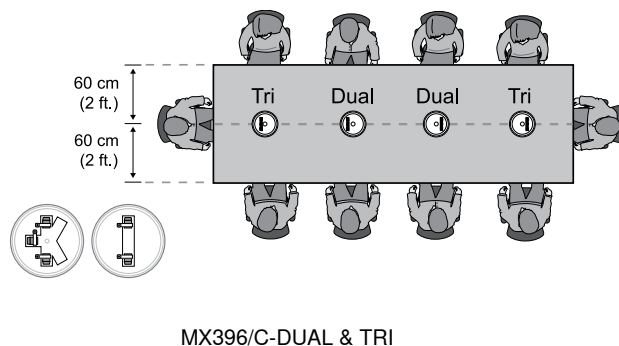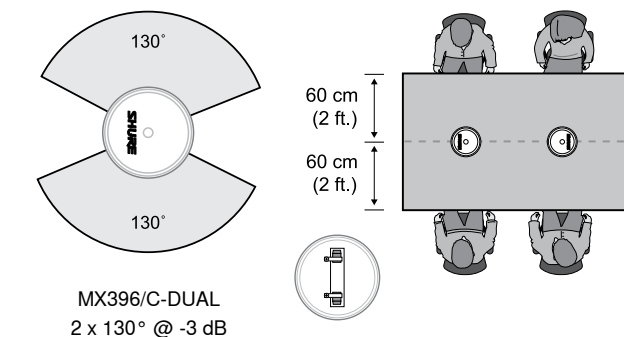


Reconfiguring the MX396-TRI for 360° Coverage

To configure the MX396 for 360° "omnidirectional" coverage, open the grille and reposition the internal mic elements as shown.

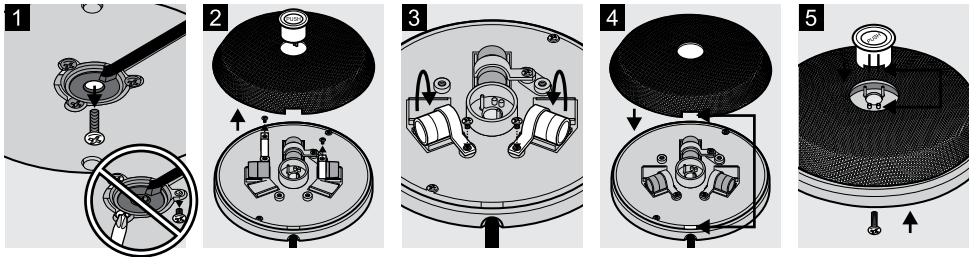

Permanent Installation

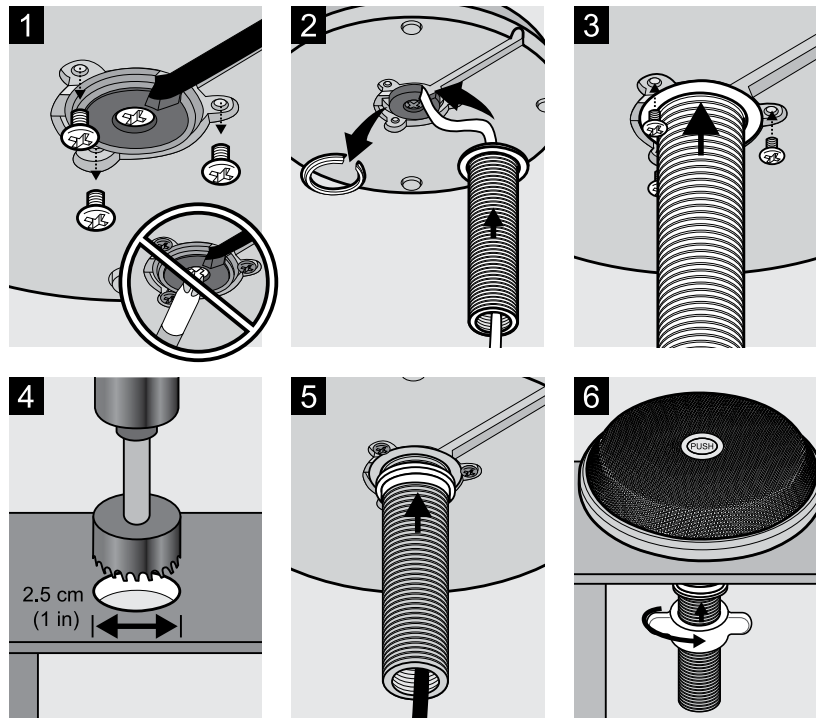


Note: Overtightening the wing nut reduces shock isolation.

Cable

The MX396 comes with a 20 ft. attached, unterminated cable.

Wire Color	Function	Mic Element
White	Mic 1 Audio +	A
Green	Mic 1 Audio –	
Orange	Mic 2 Audio +	B
Blue	Mic 2 Audio –	
Yellow	Mic 3 Audio +	C (TRI models)
Gray	Mic 3 Audio –	
Red	SWITCH OUT	All
Black	LED IN	
Silver (non-insulated)	Logic Ground	
Shield	Mic Common Ground	

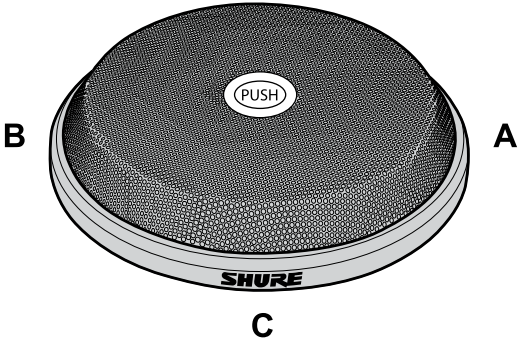

Phantom Power

Each element in the microphone requires 12 to 48 V phantom power. The LED also uses phantom power, and dims slightly when phantom power voltage drops below 48 V DC.

The Tri-element model draws 22 mA at 48 V. The Dual-element model draws 19 mA at 48 Vdc. (Each element draws 3 mA and the LED draws 13 mA, distributed equally among each element.)


NOTE: Do not connect multiple elements in parallel to a single mic input. The phantom power current draw could exceed the maximum allowable for one mic input.

Accessing the DIP Switches

Caution: Failure to reinstall the setscrew will reduce RF immunity.

DIP Switch Settings

DOWN (Default)	UP
Momentary	Toggle
Push-to-Mute	Push-to-Talk
Mute button enabled, LED illuminates when mic is active	Disable mute button (microphone always on), logic controls LED
Full Frequency Range	6dB/octave Low Cut Filter

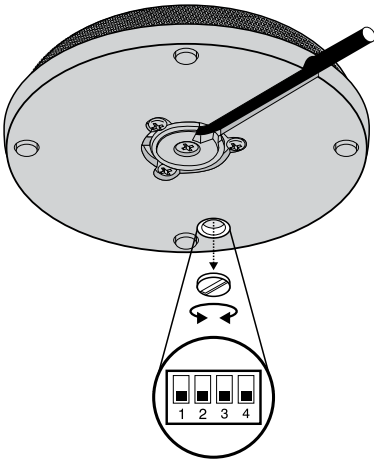

Low Cut Filter

Set **DIP Switch 4 up** to activate the low cut filter. Attenuates 6 dB per octave below 150 Hz.


Local Mute Control

The microphone ships configured for local (manual) mute control (**DIP Switch 3 down**). In this mode, the PUSH button on the microphone mutes the audio signal at the microphone. Audio is not sent to the audio outputs.

In this configuration, the LED color reflects the microphone state, as controlled by the user with the PUSH button.



Green: microphone active
Red: microphone muted

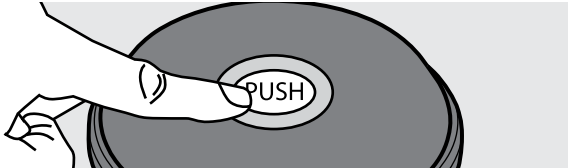

Button Configuration

For local mute control operation, use DIP Switches 1 and 2 to configure the button behavior.

Button Behavior	SWITCH OUT Logic Signal	DIP Switch Setting
Momentary: push-to-mute (as shipped).	When pushed, SWITCH OUT (red wire) falls to 0 V. When released, SWITCH OUT returns to +5 V.	
Momentary: push-to-talk		
Toggle: Push and release to toggle the microphone on or off. Mic is active when powered on.	Push and release sets SWITCH OUT to 0 V. Push again to toggle back to +5 V.	
Toggle: Push and release to toggle the microphone on or off. Mic is mute when powered on		

Logic Mute Control (Automatic Mixing)

Set **DIP Switch 3 up** to configure the microphone for logic control applications where audio from the microphone is muted by an external device, such as an automatic mixer. In this mode, the local mute function of the PUSH button is bypassed (the microphone always sends audio) and the LED does not respond directly from pushing the button.

As required by the installation specifications, wire the SWITCH OUT conductor in the microphone cable to the automatic mixer or other TTL logic device. When the talker presses the button on the microphone, it changes the voltage level at the SWITCH OUT conductor, which signals the device to mute audio for that channel or perform some other function.

To control the LED on the microphone, wire the LED IN conductor to the gate output on the automatic mixer (or any TTL logic device).

Button Configuration


For logic control operation, DIP Switch 1 determines the button behavior (DIP Switch 2 has no effect).

Button Behavior	DIP Switch Setting
Momentary: When pushed, SWITCH OUT (red wire) falls to 0 V. When released, SWITCH OUT returns to +5 V.	
Toggle: Push and release sets SWITCH OUT to 0 V. Push again to toggle back to +5 V.	


Controlling the LED Using Logic LED IN

When configured for logic mute control, connect the LED IN conductors to an external switch, relay, or a TTL gate (gate out) on an automatic mixer.


- The LED illuminates **green** when the MX396 LED IN is **grounded** (black wire connected to the bare silver wire).
- The LED illuminates **red** when LED IN is **lifted** (black wire is NOT connected to the bare silver wire).




Replacement Parts



Fastening Wing Nut
65A2190



Mounting Tube
31A2165



Rubber Isolation Rings (2)
66A405



Mic Cartridge (Cardioid)
R185B

Specifications

All measurements taken with microphone mounted on a wooden surface (76 x 76 cm)

Cartridge Type

Electret Condenser

Frequency Response

50–17000 Hz

Polar Pattern

MX396/C-DUAL	Cardioid (x2)
MX396/C-TRI	Cardioid (x3)

Output Impedance

170 Ω

Output Configuration

Active Balanced

Sensitivity

@ 1 kHz, open circuit voltage

–35 dBV/Pa (18 mV)

1 Pa=94 dB SPL

Maximum SPL

1 kHz at 1% THD, 1 kΩ load

122 dB

Equivalent Output Noise

A-weighted

30 dB SPL

Signal-to-Noise Ratio

Ref. 94 dB SPL at 1 kHz

64 dB

Dynamic Range

1 kΩ load, @ 1 kHz

92 dB

Common Mode Rejection

10 to 100,000 kHz

45 dB, minimum

Preamplifier Output Clipping Level

at 1% THD

–7 dBV (0.5 V)

Mute Switch

–50 dBminimum

Logic Connections

LED IN	Active low (≤1.0V), TTL compatible. Absolute maximum voltage: -0.7V to 50V.
LOGIC-OUT	Active low (≤0.5V), sinks up to 20mA, TTL compatible. Absolute maximum voltage: -0.7V to 24V (up to 50V through 3kΩ).

Cable

6.1 m (20 ft), attached, unterminated, three shielded audio pairs and three shielded conductors for logic control

Net Weight

594 g (1.3 lbs)

Environmental Conditions

Operating Temperature	–18–57 °C (0–135 °F)
Storage Temperature	–29–74 °C (–20–165 °F)
Relative Humidity	0–95%

Power Requirements

MX396/C-DUAL	48–52 V DC, 19.0 mA
MX396/C-TRI	48–52 V DC, 22.0 mA

CERTIFICATION

Eligible to bear CE Marking.
The Declaration of Conformity can be obtained from:
Authorized European representative: Shure Europe GmbH
Headquarters Europe, Middle East & Africa
Department: EMEA Approval
Jakob-Dieffenbacher-Str. 12
75031 Eppingen, Germany
Phone: +49 7262 92 49 0 Fax: +49 7262 92 49 11 4
Email: info@shure.de

HOMOLOGATION

Autorisé à porter la marque CE.
La déclaration de conformité peut être obtenue de l'adresse suivante:
Représentant agréé européen : Shure Europe GmbH
Siège Europe, Moyen-Orient et Afrique
Homologation EMEA
Jakob-Dieffenbacher-Str. 12
75031 Eppingen, Germany
Phone: +49 7262 92 49 0 Fax: +49 7262 92 49 11 4
Email: info@shure.de

ZERTIFIZIERUNG

Zur CE-Kennzeichnung berechtigt.
Bevollmächtigter Vertreter in Europa: Shure Europe GmbH
Headquarters Europe, Middle East & Africa
Abteilung: EMEA-Zulassung
Jakob-Dieffenbacher-Str. 12
75031 Eppingen, Germany
Tel: +49 7262 92 49 0 Fax: +49 7262 92 49 11 4
Email: info@shure.de

CERTIFICACIONES

Califica para llevar la marca CE.
La declaración de conformidad se puede obtener de la siguiente dirección:
Representante autorizado en Europa: Shure Europe GmbH
Casa matriz para Europa, Medio Oriente y Africa
Aprobación para región de EMEA
Jakob-Dieffenbacher-Str. 12
75031 Eppingen, Germany
Phone: +49 7262 92 49 0 Fax: +49 7262 92 49 11 4
Email: info@shure.de

OMOLOGAZIONI

Contrassegnabile con il marchio CE.
La dichiarazione di conformità può essere ottenuta da:
Rappresentante europeo autorizzato: Shure Europe GmbH
Sede per Europa, Medio Oriente e Africa
Approvazione EMEA
Jakob-Dieffenbacher-Str. 12
75031 Eppingen, Germany
Phone: +49 7262 92 49 0 Fax: +49 7262 92 49 11 4
Email: info@shure.de

ЕРТИФИКАЦИЯ

Соответствует требованиям для нанесения маркировки CE.
Заявление о соответствии можно получить по следующему адресу:
Уполномоченный европейский представитель: Shure Europe GmbH
Headquarters Europe, Middle East & Africa
Department: EMEA Approval
Jakob-Dieffenbacher-Str. 12
75031 Eppingen, Germany (Германия)
Телефон: +49 7262 92 49 0 Факс: +49 7262 92 49 11 4
Эл. почта: info@shure.de

認 証


CEマーキングに適合。
適合宣言書は以下より入手可能です:
ヨーロッパ認定代理店: Shure Europe GmbH
ヨーロッパ、中東、アフリカ地区本部:
部門: EMEA承認
Jakob-Dieffenbacher-Str. 12
75031 Eppingen, Germany
Phone: +49 7262 92 49 0 Fax: +49 7262 92 49 11 4
Eメール: info@shure.de

인증


CE 마크를 사용할 자격이 있습니다.
적합성 선언서를 구하실 수 있는 곳:
공인 유럽 대리점: Shure Europe GmbH
유럽, 중동, 아프리카 본부
부서: EMEA(유럽중동) 승인
Jakob-Dieffenbacher-Str. 12
75031 Eppingen, Germany
전화: +49 7262 92 49 0 팩스: +49 7262 92 49 11 4
이메일: info@shure.de

认证

允许使用 CE 标志。
可从以下地址获得符合性声明:
欧洲授权代表: Shure Europe GmbH
Headquarters Europe, Middle East & Africa
Department: EMEA Approval
Jakob-Dieffenbacher-Str. 12
75031 Eppingen, Germany
电话: +49 7262 92 49 0 传真: +49 7262 92 49 11 4
电子邮件: info@shure.de

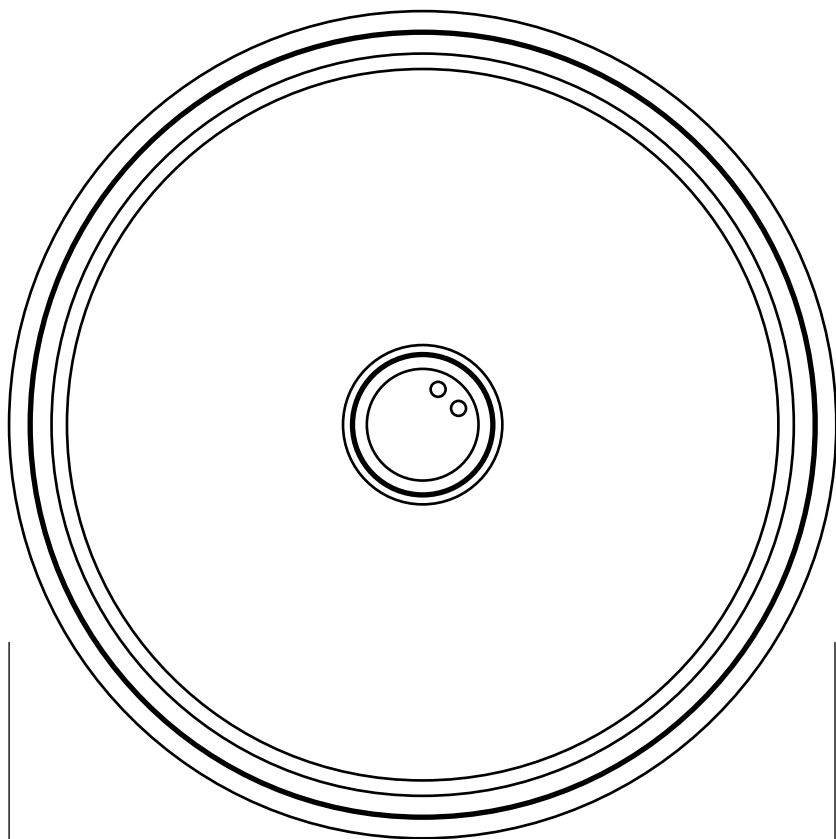


← 4 5/16 in (110 mm) →

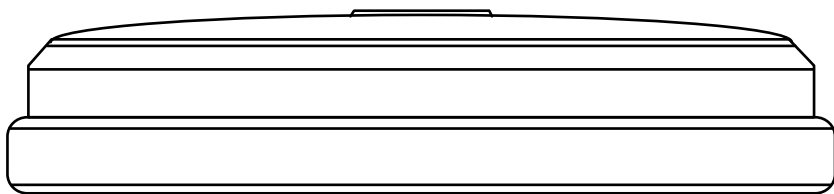


↑ 15/16 in
(24 mm)
↓

1/16 in
(1 1/2 mm)




← 1 in
(25 mm) →

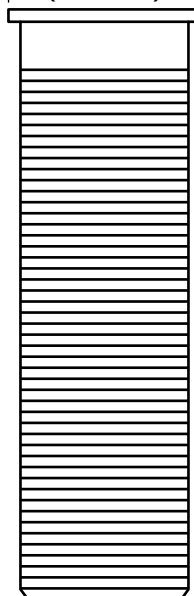

7/8 in
(22 mm)

1/4 in
(6 mm)



3 in
(77 mm)

31A2165
Mounting Tube



**United States, Canada, Latin
America, Caribbean:**

Shure Incorporated
5800 West Touhy Avenue
Niles, IL 60714-4608 USA

Phone: 847-600-2000
Fax: 847-600-1212 (USA)
Fax: 847-600-6446
Email: info@shure.com

Europe, Middle East, Africa:

Shure Europe GmbH
Jakob-Dieffenbacher-Str. 12,
75031 Eppingen, Germany

Phone: 49-7262-92490
Fax: 49-7262-9249114
Email: info@shure.de

Asia, Pacific:

Shure Asia Limited
22/F, 625 King's Road
North Point, Island East
Hong Kong

Phone: 852-2893-4290
Fax: 852-2893-4055
Email: info@shure.com.hk