



10x2 Scaled Matrix with Native Hi-Res. Outputs for Installations



Inputs



Outputs

Features



Smart Matrix LE at a glance

- > 10 inputs including 2 x DVI-I and 2 x 3G/HD/SD-SDI
- > Native Matrix Mode with true seamless transitions
- > Numerous Live Effects for impressive A/V presentations
- > User-friendly interface with its front panel control
- > Affordable solution for professional presentations

Key Features

10 Inputs

- 2 DVI Inputs
- 6 Universal Analog Inputs
- 2 x 3G/HD/SD-SDI
- SDTV, EDTV, HDTV and Computer formats up to 2K
- Full digital In/Out Processing

2 Outputs

- 2 Analog and Digital Outputs: Output #1 & Output #2
- Computer Formats up to 2K
- RGBHV and DVI

Operation Modes & Effects

- 1 Operation Mode: Native Matrix Mode
- DSK on analog or digital inputs on Live Background
- Seamless Transitions with numerous effects
- Transitions: Fade (Dissolve), Cut, Wipe and Slide
- Chroma/Luma Key/DSK Title

Reference


- > SMX100: Smart Matrix LE

To Control SMX100

- > Remote Control Software (RCS): SMX100 (Supplied)
- > ARC200: Axion2
- > ORC50: Orchestra
- > TRK-800: Triple Remote Keypad TRK-800
- > RK-300: Remote Keypad RK-300



Diagram

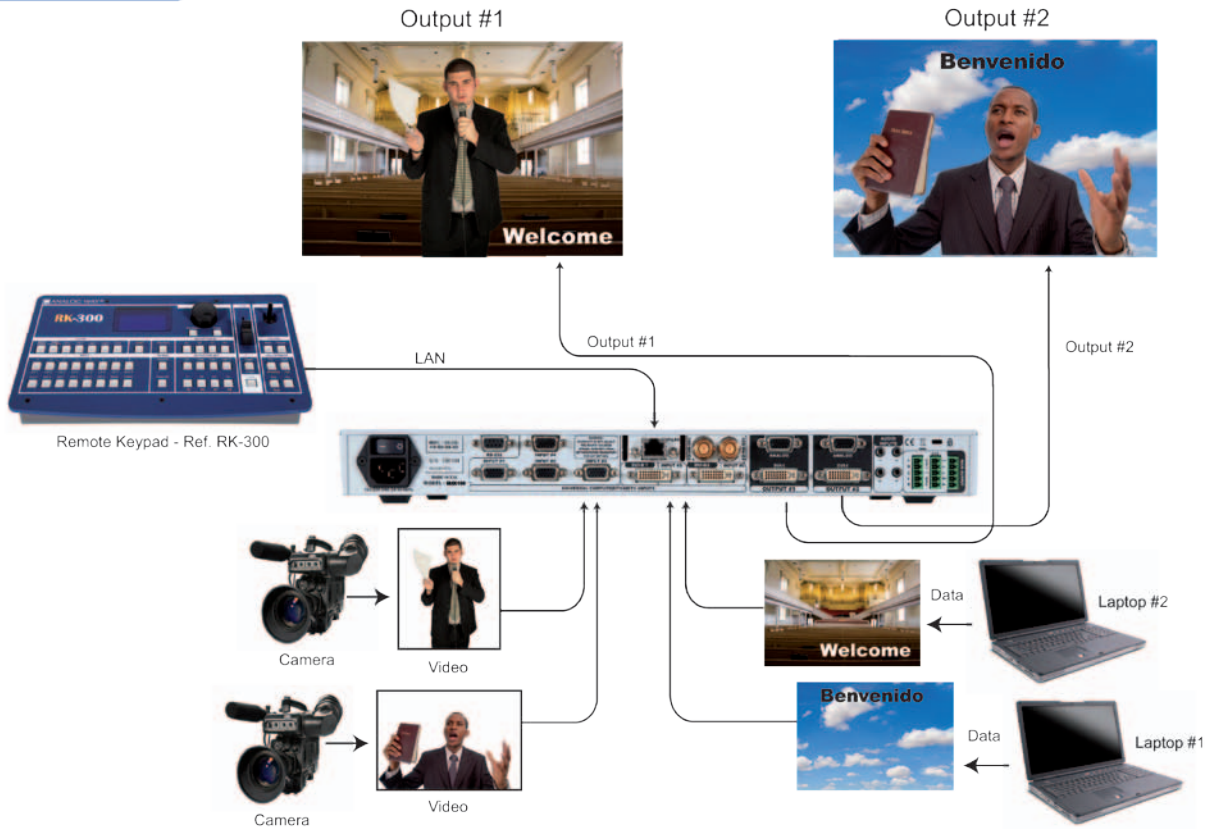

Technical Specifications

6 Universal Inputs - Analog Inputs (All inputs #1 to #6)

SD-TV:

- Composite, S.Video, YUV, RGsB or RGBS
- NTSC: 15.735kHz/60Hz
- PAL/SECAM: 15.625kHz/50Hz

ED/HD-TV:

- RGsB, RGBS or YUV
- 480p/60 Hz – 576p/50 Hz - 720p, 1080i, 1035i/50 or 60Hz – 1080p/24, 25, 30, 50 or 60 Hz – 1080psF /24, 25 or 30 Hz Computer
- RGBHV, RGBS or RGsB
- Resolution up to 1600x1200/60 Hz, 1920x1200/60 Hz or 2048x1080/60 Hz
- Horizontal frequency from 31.5 to 130 kHz
- Vertical frequency up to 130 Hz
- FpxMax = 165MHz

4 Digital Inputs (DVI-I 1, DVI-I 2, SDI1 and SDI2)

- DVI-D: SD-TV, ED-TV, HD-TV and Computer formats
- SDI: SD-TV & HD-TV – YUV/10bits/4:2:2, or 3G-SDI
- Automatic synchronization detection

Output #1 and Output #2

Computer Digital and Analog:

- RGBHV, RGBS or RGsB and DVI
- Resolution up to 1600x1200/60 Hz, 1920x1200/60 Hz or 2048x1080/60 Hz
- Vertical frequency 50, 60, 72 or 75 Hz depending on Output format
- FpxMax = 165MHz

HD-TV:

- RGsB, RGBS or YUV, DVI
- 720p, 1080i, 1035i/50 or 60Hz - 1080p/24, 25, 30, 50 or 60Hz - 1080psF/24, 25 or 30Hz

Operation Standards

SMPTE 259M, SMPTE 274M, SMPTE 292M, SMPTE 296M and SMPTE 424M

Audio Stereo In/Out

Inputs:

- 4 Audio stereo inputs + 1 Auxiliary + 2 from Embedded SDI
- AUX Balanced
- Vi = +15dB
- Zi = 20 kOhms (Unbalanced)/40 kOhms (Balanced)
- Adjustable Level per input

Outputs:

- 2 outputs/Unbalanced
- Vo = +15 dBu/300 Ohms (Unbalanced)
- Vo = +21 dBu/600 Ohms (Balanced)

User Controls - Front Panel

- Standby On/Off
- Input, Layer and Logo direct access
- Freeze/Black
- Effect and preset selection
- Large Graphic VFD screen with control knobs and buttons for Easy and fast access to menus and adjustments

Connectors - Rear Panel

- Input #1 to #4 Connectors:
 - HD15-F: (Analog SD/ED/HD-TV and Computer)
- Input #5 to #6 and DVI-I 1 to DVI-I 2 Connectors:
 - DVI-I Female: (Analog SD/ED/HD-TV and Computer)
- Input SD/HD-SDI:
 - SDI 1 & SDI 2: BNC-F
- Audio:
 - 3.5mm Stereo jack: inputs #1 to #4
 - 5 pin MCO connectors: 2 for Inputs and 1 for Output

- DB9: Dual RS232 for remote control
- RJ45: Ethernet connection
- AC main connector with On/Off switch

Output #1 and Output #2 Connectors

Each output is fitted with:
 - DVI-I Female: (Digital and Analog) RGB or YUV
 - HD15 Female: RGB or YUV

Dimensions

- 1U, 19"
- D 13.8" x W 19" x H 1.74"
- D 330 mm x W 480 mm x H 44 mm

Weight

- 4,3kg/9,48lbs

Power Supply

- Internal, universal, automatic, 100-240 V; 50/60 Hz; 140 W (UL, CSA, GS, CE)

Supplied with

- 1 x Power supply cord
- 2 x DVI-I male to HD15 Female and DVI-D female breakout cable
- 1 x HD15 to 5 BNC cable
- 1 x Ethernet cross cable (for update)
- 1 x Set of 3 audio 5-pin screw terminals
- 1 x Remote Control Software (RCS) (PC Only)*
- 1 x User Manual* (PDF Version)
- 1 x Quick Start Guide*

Warranty

3-year warranty on parts and labor back to factory

Specifications subject to change without prior notice



* All RCS, User Manuals and Quick Start Guides are also available on www.analogway.com