

INSTRUCTION MANUAL

IDX wants to thank you for purchasing the IA-300a, our 210W AC Adapter, and hopes that its robust and careful design will satisfy all your power needs . Please utilize this Operation Manual for help on how to use the IA-300a. If you have any additional questions, please contact the appropriate IDX offices, listed below.


IA-300a

210W AC Adapter Power Supply

FEATURES

- Universal Power Supply – the IA-300a can accept AC power ranging from 100 ~ 240VAC.
- The power supply is automatic and does not need to be manually switched.
- The DC power supply output has the high capacity of 15.2A (210W) and output voltage can be varied between 12V ~ 17V.

OPERATING INSTRUCTIONS

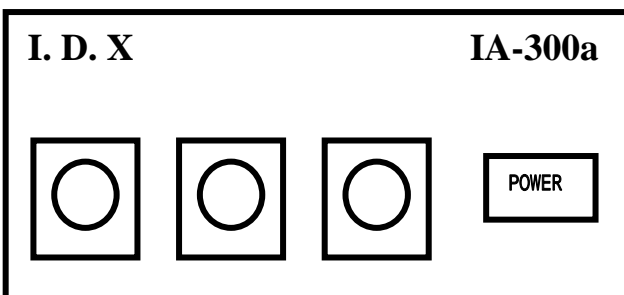

NOTE:DC Output (4P-XLR Connectors)
Minus / Plus

- a. When power is ON, the DC outputs 1,2,3 are output in parallel.(4P-XLR Connectors MAX 10A for single connector, total in parallel is MAX 15.2A / 13.8V)
- b. When shipped, the output voltage is set at approx. 13.8V. The voltage can be adjusted to the desired output between 12V-17V using the rear panel mounted variable resistor(VR).

OPERATION PRECAUTIONS

- During use the unit may get a little warm, this is normal.
- Do not rest any object on the unit, or block the ventilation holes during operation.
- When in use, use in a horizontal position with the 4 rubber feet facing down and on a flat surface.
- Do not expose the unit to direct sunlight, use in well ventilated place.
- If the unit's power fails to come on, contact your supplier or the IDX's office listed below.
- For repair or replacement, please contact the IDX office below or our authorized representative.

SPECIFICATIONS

Input voltage	100~240VAC • 50/60Hz (automatic)
Power Consumption	400VA
DC Output	MAX 210W (13.8V / 15.2 A) 12V-17V adjustable
DC Output Connector	4P XLR Connector Female × 3 (Pin 1:Minus / Pin 4:Plus)
Dimension	125(W) x 75(H) x 245(D) mm Approx .
	4.9(W) x 3.0(H) x 9.6(D) inches Approx .
Weight	2.0Kg (4.4 lbs) Approx .

FOR SALES AND SERVICE CALL

In Japan/Asia

IDX Company,Ltd.
6-28-11 Shukugawara,
Tama-ku, Kawasaki-Shi,
Kanagawa-ken 214-0021, Japan

Sales and service

Phone +81-44-850-8801
Fax +81-44-850-8838
E-mail idx.japan@idx.tv

In the United States

IDX System Technology, Inc.
1602 Lockness Place,
Torrance, CA 90501
USA

Sales and Service

Phone +1-310-891-2800
Fax +1-310-891-3600
E-mail idx.usa@idx.tv

In Europe/Middle East

IDX Technology Europe, Ltd.
Unit 9, Langley Park
Waterside Drive, Langley,
Berkshire SL3 6EZ, England

Sales and service

Phone +44-1753-547-692
Fax +44-1753-546-660
E-mail idx.europe@idx.tv