



## FiberLink® 3500 Series



**2 or 4 Channel 3G/HD/SD-SDI  
transmission over one or two single  
mode or multimode fibers**

**Installation and Operations  
Manual**

## Contents

Welcome .....	3
Features.....	3
Package Contents .....	3
Part Number Specifications .....	4
General Specifications .....	5
Transmitter Specifications .....	5
Serial Video BNC Inputs.....	5
Optical Output.....	6
Receiver Specifications .....	6
Optical Input .....	6
Serial Video BNC Outputs .....	6
Operating Loss Budget.....	7
Maximum Useable Distance .....	7
System Specifications .....	7
Installation Instructions .....	8
Alarm Switch Settings & Options.....	9
Indicator LEDs .....	10
Operating Pointers .....	11
Troubleshooting .....	11
Maintenance and Repairs .....	12
FiberLink 6656 Visible Light Source.....	13
FiberLink 6650 Optical Power Meter .....	13
FiberLink 6652 and 6654 Dual Wavelength Light Source .....	13
Related Products.....	14

## Welcome

Thank you for purchasing Artel Video Systems' FiberLink 3500 Series. The 3500 Series is used to transmit up to 4 channels of 3G/HD/SD-SDI with or without pre-embedded audio and data over a single or dual fiber optic core. The FiberLink 3500 Series is compatible with single mode or multimode fiber. The system delivers noise-free transmission that retains all of the signals' initial parameters, regardless of fiber optic cable attenuation. The 3500 Series also provides immunity to video pathological signals over the entire link budget and operating temperature range. **The 3500 series consists of a number of transmitter/receiver options. Artel recommends you download the data sheet for your specific model to augment the information in this manual.**

## Features

- Each input signal is equalized and re-clocked prior to fiber optic transmission
- Immunity to pathological signals over entire link budget and operating temperature range
- Compliant with SMPTE ST 425-3, ST 425-5, 424M-2006, 259M-2006, 292-2006
- Supports transmission of SMPTE 305M-2005, 310M-2004, 344M-2000, DVB-ASI
- Supports both Single Mode and Multimode ( 62.5u & 50u) fiber types
- Supports 3G/HD/SD-SDI inputs with embedded audio and data and DVB-ASI.
- 14dB Optical Link Budget - 2.97 Gbps (19dB for high power models)
- Wide operating temperature range: -10° C to +50° C
- Available in Box and Card versions
- Card version compatible with the FiberLink 6000A Rack Card Cage
- Designed and manufactured in the USA by Artel

## Package Contents

This User's Manual and **ONE** of the following FiberLink models

- 3512A transmitter
- 3513A receiver
- 3514 transmitter
- 3515 receiver
- 3522 transmitter
- 3523 receiver
- 3524 transmitter
- 3525 receiver

## Part Number Specifications

### Part Number Specification for Transmitter and Receiver Pairs

#### Transmitter Part Numbers

#### Receiver Part Numbers

3512A .....	3513A
3514 .....	3515
3522 .....	3523
3524 .....	3525

### Box and Rack Card Suffix Designations

Each Part Number above must include a suffix designation to indicate the following:

- Box or Card, Wavelength, Optical Connector.

The suffix will look like this example when completed:

Model - B7S = Box, standard laser, ST connector

Model - C7L = Card, standard laser, LC connector

Case Style:	Box .....	-B
	Rack Card .....	-C
Wavelength:	MM only (See data sheet) .....	-3
	Standard Power Multimode/Single Mode .....	-7
	High Power, Single mode only (See data sheet) .....	-9
Optical Connector:	ST .....	-S
	LC .....	-L

## General Specifications

Indicators	Power, HD/3G data rate lock, SD/DVB-ASI data rate lock, Alarm (Card version)
Box Version Dimensions	6.5W x 1.15H x 6L (in) 165W x 29H x 152L (mm)
Weight	12.3 ounces, 382 grams
Number of slots in 6000A card cage	2
Power	9-24 Volts AC or DC Transmitter - 5.0 Watts; 17.66 BTU/Hr Receiver - 4.0 Watts; 13.64 BTU/Hr
Operating Temperature	-10°C to +50°C

## 3500 Transmitter Specifications\* (3512A, 3514, 3522, 3524)

### Serial Video BNC Inputs

Number of Inputs	2 (3512A, 3522) or 4 BNC (3514, 3524), 75 Ohms
Data Rate Range	19.4 Mbps to 2.97 Gbps
Standards Supported	SMPTE ST 425-3, ST 425-5, 424M-2006, 259M, 292, 305M, 344M, DVB-ASI
Re-clocked Data Rates	270 Mbps (SMPTE 259M, DVB-ASI-270) 1.485 Gbps (SMPTE 292) 2.97 Gbps (SMPTE 424M-2006)
Equalization	Automatic up to 100m of Belden 1694A at 2.97Gbps, 140m at 1.485 Gbps and 180m at 270 Mbps
Return Loss	>10dB up to 2.97 Gbps
Signal Level	800mv $\pm$ 10%
DC Offset	0V $\pm$ 0.5V
Rise/Fall Time	<135 ps at 2.97 Gbps per SMPTE 424M; <270ps at 1.485 Gbps per SMPTE 292; 0.4 to 1.5ns at 270 Mbps per SMPTE 259M

## Technical Specifications

### 3500 Transmitter Specifications \* (3512A, 3514, 3522, 3524) (cont.)

Overshoot	<10% of Amplitude
Timing Jitter	<0.2 UI at 270Mbps; <1.0 UI at 1.485 Gbps; <2.0 UI at 2.97 Gbps with color bar signal applied
Alignment Jitter	<0.2UI at 270Mbps, <0.2UI at 1.485 Gbps; <0.3 UI at 2.97 Gbps with color bar signal applied
Re-clocking	At 270 Mbps, 1.485 Gbps & 2.97 Gbps

### Optical Output

Connector	LC or ST receptacle, PC polish
Wavelength *	CH1 = 1570nm CH2 = 1550nm CH3 = 1530nm (3514) CH4 = 1510nm (3514)
Emitter Type *	DFB Laser or FP Laser

### 3500 Receiver Specifications\* (3513A, 3515, 3523, 3525)

Maximum Output Power *	-1 dBm
------------------------	--------

### Optical Input

Connector	LC or ST receptacle, PC polish
Wavelength *	1310nm-1570nm
Minimum Input Power *	-17 dBm at 2.97 Gbps, -20 dBm at 1.485 Gbps, -20 dBm at 270 Mbps
Maximum Input Power	-1 dBm

### Serial Video BNC Outputs

Number of Outputs *	2 (3513A, 3523) or 4 BNC, 75 Ohms, non-inverting
Signal Level	800mv $\pm$ 10%
DC Offset	0V $\pm$ 0.5V

**\* See Specific Data Sheet For Your Model**

## Technical Specifications

### 3500 Receiver Specifications \* (3513A, 3515, 3523, 3525) (cont.)

Rise/Fall Time	<135ps at 2.97 Gbps per SMPTE 424M; <270ps at 1.485 Gbps per SMPTE 292; 0.4 to 1.5ns at 270 Mbps per SMPTE 259M
Overshoot	<10% of Amplitude
Timing Jitter	<0.2UI at 270Mbps, <1.0UI at 1.485 Gbps; <2.0UI at 2.97 Gbps with color bar signal applied
Alignment Jitter	<0.2UI at 270Mbps, <0.2UI at 1.485 Gbps; <0.3UI at 2.97 Gbps with color bar signal applied
Re-clocking	At 270 Mbps, 1.485 Gbps and 2.97 Gbps

**\* See Specific Data Sheet For Your Model**

### 3500 Transmitter / Receiver \* System Specifications

#### Operating Loss Budget

Single Mode Fiber	** 0-14 dB at 2.97 Gbps 0-15 dB at 270 Mbps	0-15 dB at 1.485 Gbps
Multimode Fiber (62.5u)	0-14 dB at 2.97 Gbps 0-15 dB at 270 Mbps	0-15 dB at 1.485 Gbps
Multimode Fiber (50u)	0-14 dB at 2.97 Gbps 0-15 dB at 270 Mbps	0-15 dB at 1.485 Gbps

#### Maximum Useable Distance

Single Mode Fiber	** 50 km at 2.97 Gbps 55 km at 270 Mbps	55 km at 1.485 Gbps
Multimode Fiber (62.5u)	0.8 km at 2.97 Gbps 2.5 km at 270 Mbps	1 km at 1.485 Gbps
Multimode Fiber (50u)	1 km at 2.97 Gbps 3 km at 270 Mbps	1.3 km at 1.485 Gbps

**\* See Specific Data Sheet For Your Model**

\*\* Distance specifications are approximate, based upon connecting a 3500 Transmitter to a 3500 Receiver, and are not guaranteed. Artel cannot estimate or guarantee operating loss budgets when the 3500 Series is used with other, non-FiberLink devices.

Operating loss budget must not be exceeded. See data sheet for your specific model(s).

## Installation Instructions


The FiberLink 3500 Series of fiber optic transmission systems are ready for immediate use and do not require any special tools or equipment. However, an Optical Power Meter, such as the FiberLink 6650, can be useful in determining optical loss budgets during your systems design and maintenance.

### The following instructions describe the typical installation procedure:

- 1) Connect the video source to the video input BNC connector on the transmitter unit.
- 2) Connect the video output cable to video output BNC connectors on the receiver unit.
- 3) Terminate any unused BNC output connector at 75 Ohms.
- 4) Connect the fiber optic cable to the transmitter and receiver units.
- 5) Connect the Universal Power Supply to the transmitter and receiver units.  
For box versions using DC power, please refer to figure 1.
- 6) When power is applied, the green POWER LED should illuminate, indicating the presence of operating power. The 3G/HD/SD RATE LED will give an indication as described in the Indicator LED's and Alarm Circuitry section of this manual.
- 7) The system should now be operational.

*Note: The Rack Card version has an additional red LED for indicating the presence of an alarm condition (loss of signal). Refer to Indicator LED's and Alarm Circuitry sections of this manual.*

**Figure 1:**  
**Power Connector**  
**DC Input Polarity**

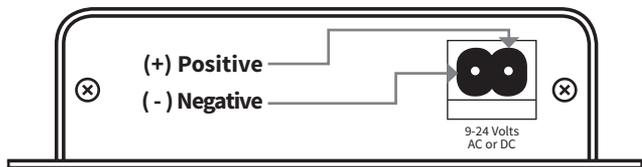

**DANGER!**

The transmitting element in the FiberLink 3500 transmitter unit contains a solid state Laser Diode located in the optical connector. This device emits invisible infrared electromagnetic radiation which can be harmful to human eyes. The radiation from this optical connector, if viewed at close range with no fiber optic cable connected to the optical connector, may be sufficient intensity to cause instantaneous damage to the retina of the eye. Direct viewing of this radiation should be avoided at all times!

## Alarm Switch Settings & Options

The Rack Card version of this product has an additional red indicator LED that illuminates when an alarm condition exists.

The rack card unit also provides an output to drive a model 6020A Alarm Sensing Module which provides an audible tone and activates a set of contacts for external signaling purposes.

### Alarm Switch Settings for the Transmitter Card

Switch Position	Alarm Indication	On	Off
1	Ch 1 Loss of Input Video	Enabled	Disabled
2	Ch 2 Loss of Input Video	Enabled	Disabled
3 (3514 & 3524 Only)	Ch 3 Loss of Input Video	Enabled	Disabled
4 (3514 & 3524 Only)	Ch 4 Loss of Input Video	Enabled	Disabled

### Alarm Switch Settings for the Receiver Card

Switch Position	Alarm Indication	On	Off
1	Ch 1 Loss of Optical Signal	Enabled	Disabled
2	Ch 2 Loss of Optical Signal	Enabled	Disabled
3 (3514 & 3524 Only)	Ch 3 Loss of Optical Signal	Enabled	Disabled
4 (3514 & 3524 Only)	Ch 4 Loss of Optical Signal	Enabled	Disabled

## Indicator LEDs

The FiberLink 3500 Series has four integral indicator LEDs that are used to monitor the state of the unit. Card versions have an additional Alarm LED.

### Transmitter LEDs (For Each Channel)

LED	Status	Definition
Power	On	Indicates that correct power has been applied.
HD/3G Rate	Off On	Indicates no HD/3G-SDI data rate lock Indicates HD/3G-SDI data rate lock at 1.485Gbps, 2.97 Gbps, or 2.97/1.001 Gbps
SD Rate	Off On	Indicates no SD-SDI or DVB-ASI data rate lock Indicates SD-SDI or DVB-ASI data rate lock at 270 Mbps
Alarm	On	Loss of input video (card version only)

*Note: The 3G, HD and SD LEDs indicators are off when a non-standard signal is applied.*

### Receiver LEDs (For Each Channel)

LED	Status	Definition
Power	On	Indicates that correct power has been applied.
HD/3G Rate	Off On	Indicates no HD/3G-SDI data rate lock Indicates HD/3G-SDI data rate lock at 1.485Gbps, 2.97 Gbps, or 2.97/1.001 Gbps
SD Rate	Off On	Indicates no SD-SDI or DVB-ASI data rate lock Indicates SD-SDI or DVB-ASI data rate lock and re-clocked video available on outputs
Alarm	On	Loss of optical signal (card version only)

*Note: The 3G, HD and SD LEDs indicators are off when a non-standard signal is applied.*

## Operating Pointers

Remember to check attenuation of the fiber optic cable. The system will only operate properly if these specifications fall within the range of the system's loss budget.

Note: If no signal is applied to the 3500 Transmitter, no optical power will be present on the 3500 Transmitter's output.

## Troubleshooting

Multimode fiber optic cable contains an optical fiber with a light carrying "core" that is only .0025 inches (62.5 microns) in diameter. Single mode fiber optic cable has an even smaller "core," only .00032 to .0004 inches (8-10 microns). This is smaller than a human hair! Therefore, any minute particles of dirt or dust can easily block the fiber from accepting or radiating light. To prevent this from happening, always use the provided dust caps whenever optical connectors are exposed to air. It is also a good idea to gently clean the tip of an optical connector with a lint-free cloth moistened with alcohol whenever dust is suspected.

The status of the LEDs should provide the first clue as to the origin of any operational failure. If these are off, it usually means that the fiber is broken or has too much attenuation. Next, be certain that the input and output signal connections are correct.

An optical power meter, such as the FiberLink 6650, a visible light source, such as the FiberLink 6656, and a Dual Wavelength Light Source, such as the FiberLink 6652 for Multimode or 6654 for Single Mode, can greatly assist and expedite troubleshooting of fiber optic transmission systems and are recommended tools all installers should have available.

Finally, although multimode and single mode devices may look the same, they will not operate properly together. Using the wrong device or fiber can easily add more attenuation than specified, resulting in poor overall performance. It should be noted that some of our fiber optic products support both single mode and multimode fiber in the same unit.

If, after reviewing the above possibilities, the system is still not operating, please contact the Customer Service Department for further assistance. If you suspect your problem is caused by the optics or the fiber optic cable, and you have an optical power meter, please take the appropriate measurements prior to contacting customer service.

## Maintenance and Repairs

The FiberLink 3500 Series has been manufactured using the latest semiconductor devices and techniques that electronic technology has to offer. They have been designed for long, reliable and trouble-free service and are not normally field repairable.

Should difficulty be encountered, Artel Video Systems maintains a complete service facility to render accurate, timely and reliable service of all products.

The only maintenance that can be provided by the user is to ascertain that optical connectors are free of dust or dirt that could interfere with light transmission and that electrical connections are secure and accurate. Please see the Troubleshooting section of this manual for additional information.

An optical power meter, such as the FiberLink 6650, a visible light source, such as the FiberLink 6656, and a Dual Wavelength Light Source, such as the FiberLink 6652 for Multimode or 6654 for Single Mode, can greatly assist and expedite troubleshooting of fiber optic transmission systems and are recommended tools all installers should have available.

All other questions or comments should be directed to our Customer Service Department. It should be noted that many “problems” can easily be solved by a simple telephone call.

If you suspect your problem is caused by the optics or the fiber optic cable, and you have an optical power meter, please take the appropriate measurements prior to contacting customer service.

---

Certifications





### FiberLink 6650 Optical Power Meter

The FiberLink 6650 Optical Power Meter is a high accuracy, high resolution, microprocessor controlled optical power meter. 65 dB dynamic range; calibrated to measure 850, 1300, 1310 and 1550nm. Works with multimode and single mode fiber. Graphical LCD display with intuitive user interface with simple 2-key operation.



### FiberLink 6652/6654 Light Sources

The FiberLink Light Source offers a laser output at selectable wavelengths, allowing for convenient, on-site testing of fiber networks during construction and maintenance procedures.



### FiberLink 6656 Visible Light Source

The FiberLink 6656 is a light-weight, hand-held tool used to quickly troubleshoot faults in the continuity of both single-mode and multimode fibers. High-intensity visible laser allows for visible fault location of breaks and micro-bends in both single-mode and multimode fibers



### FiberLink 6658

The FiberLink Optical Length Meter measures the length of both single mode and multimode fiber with accuracy of  $\pm 2.5$  meters. Generates a pulsed signal for use with fiber identifiers. Easy-to-read bright red 7-segment LED display. Comes equipped with industry preferred ST connectors.

## Related Products

# FiberLink 3360 3G/HD/SD-SDI & 4 Pair AES Audio Series



The FiberLink 3360 Series allows you to transmit 3G, HD or SD-SDI as per SMPTE 424M-2006, 292 and 259 with the ability to embed up to 8 channels (4 pairs) of AES/EBU digital audio. Convenient switches on the 3360 Series transmitter allow the operator to embed each of the four pairs of audio independently, to strip previously serialized audio, or to pass it through without modification. At the receive end of the fiber optic link, the operator can decide which audio pairs they need de-embedded.

Audio signals are not required to operate the FiberLink 3360 link and it can be used as a stand-alone 3G/HD/SD-SDI optical link. Previously serialized data is left intact throughout the entire transmission process and the 3360 Series is immune to pathological signals over the entire budget link and operating temperature range.

Signals are equalized and re-clocked prior to fiber optic transmission and the 3361 receiver features a re-clocked SDI output.

The 3360 Series is compliant with SMPTE 297-2006 and has the ability to operate seamlessly with FiberLink Matrix and other SMPTE 297-2006 fiber optic compliant devices.

Available in card versions and a small footprint box version, it is ideal for broadcast or corporate studios, OB vans, rental and staging, auditoriums, stadiums and theaters, airport or transportation hubs, distance learning, surgical or medical imaging and more

**Learn more at [artel.com](http://artel.com)**



## Proven Products, Unrivalled Service, and Great Support



High performance plug and play products

Stand alone and card cage versions available

Solutions for most video, audio, and data formats

Multimode and single mode versions

Designed and manufactured in the USA

Training and installation support available

24x7x365 technical support available



Artel Video Systems Corp.  
5B Lyberty Way,  
Westford, MA 01886 USA  
T: 978-263-5775  
F: 978-263-9755  
sales@artel.com  
customer@artel.com  
www.artel.com

All specifications subject to  
change without notice.  
©2016  
Updated 07/31/2016  
CS200-129849-00\_G