

Recording Packages

PODCASTUDIO USB

Complete PODCASTUDIO Bundle with
USB/Audio Interface

- Everything you need for professional podcasting, music production and digital home recording
- Get a full recording studio "out of the box" including USB/audio interface, mixer, microphone, headphones and more
- High-resolution 2 In/2 Out USB audio interface with plug-and-play for Windows XP* (or higher) and Mac* OS X* operating systems
- Studio-class 5-input 2-bus mixer with premium mic preamp and 2-band "British" EQ
- Dynamic broadcast-style microphone with 2-stage pop filter
- High-performance studio headphones with ultra-wide frequency response
- Table microphone stand, XLR microphone cable and 2 stereo RCA cables
- Comprehensive podcasting software (Podifier*, Juice*, PodNova*, Golden Ear*) and powerful audio editor (Audacity*) downloadable at behringer.com
- Illustrated quick-start guide "How to Podcast"
- 3-Year Warranty Program*
- Conceived and designed by BEHRINGER Germany



Looking for the ideal way to express yourself? Ever dreamed of becoming a famous producer? Then podcasting is the answer and the PODCASTUDIO USB bundle has everything you need to make high-quality podcasts, produce your own music and home recordings – plus it works seamlessly with your PC or Mac* computer! We even provide all the software you'll need, a USB/Audio Interface, mixer, headphones and much more – you'll be up and running in mere moments, right out-of-the-box!



XENYX 502 Mixer

No matter what your audio mixing needs, the XENYX 502 provides the performance and features that can take your talent to the next level. Professional sound quality, our legendary XENYX mic preamps, British-style EQs and rugged reliability make BEHRINGER XENYX 502 ideal for both your live gigs and recording sessions.

*Mac and OS X are trademarks of Apple Inc. Windows XP is either a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries. All third-party trademarks are the property of their respective owners. Their use neither constitutes a claim of the trademark nor affiliation of the trademark owners with MUSIC Group. Product names are mentioned solely as a reference for compatibility, effects and/or components. Warranty details can be found at music-group.com.

PODCASTUDIO USB

Complete PODCASTUDIO Bundle with
USB/Audio Interface

UCA222 USB Audio Interface

The [U-CONTROL UCA222](#) allows you to connect instruments and other audio devices to your computer, effectively merging the analog and digital worlds. It accomplishes this via 2 analog mono Inputs and Outputs (for monitoring), USB connectivity – and an additional S/PDIF optical output. The stereo headphone output features a dedicated level control and lets you listen to both the input and output.



XM8500 Microphone


The [ULTRAVOICE XM8500](#) dynamic microphone is a performing or home recording enthusiast's dream come true! This professional-quality microphone is designed to capture your sounds with outstanding sensitivity and accuracy. With a cardioid pickup pattern for excellent sound source separation and feedback rejection, this ultra-wide frequency response mic is an excellent choice for any performing or recording scenario – and it's rugged enough to go the distance! With its integrated shock mount system, mic stand adapter, spherical wind and pop filter, all in an impact-resistant carrying case – the [XM8500](#) just may be the only microphone you will ever need.

PODCASTUDIO USB

Complete PODCASTUDIO Bundle with
USB/Audio Interface

Professional HPM1000 Headphones

HPM1000 headphones provide everything you need for comfortable listening. The oval-shaped ear cups contain high-resolution capsules that deliver every nuance of your sound. Featuring a single-sided cord that resists tangling; an ultra-comfortable headband; and a 1/4" adapter for the 1/8" connector, HPM1000 phones are compatible with everything from your smartphone – to your mixing console.

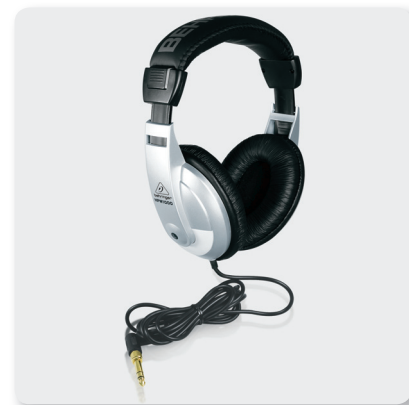

Compose. Record. Mix. Share.

Traktion is one of the world's fastest and easiest Digital Audio Workstations (DAW) for composing, recording, editing, mixing and sharing your music with the world. Featuring a single-screen interface, and pushing the envelope in design elegance, Traktion brings together outstanding Pro DAW features, such as dynamic automation, unlimited track count, MIDI recording and support for VST and AU plug-ins. This powerful music production software gives you all the tools of an entire professional-grade recording studio. Learning a DAW has never been easier, thanks to their vast and readily available library of resources.

As our way of saying "Thank You", when you register your PODCASTUDIO USB at behringer.com, we'll reward you with a complimentary download code for the full version of Traktion. Recording and editing couldn't be easier. To learn more about Traktion, visit traktion.com/support/videos.

Share the Love. Visit traktion.com for more.

PODCASTUDIO USB

Complete PODCASTUDIO Bundle with
USB/Audio Interface

Superb Performance, Super-Affordable

Get on the air immediately with the fantastic PODCASTUDIO USB recording package. This amazing PODCASTUDIO USB setup includes a: professional 5-input [XENYX 502](#) mixer with our studio-grade XENYX Mic Preamp and 2-band "British" EQ; pair of high-quality [HPM1000](#) headphones; great-sounding [XM8500](#) dynamic mic; versatile, high-performance [UCA222 USB](#) audio interface – and all the cables and recording/podcasting software you'll ever need. See your local [BEHRINGER](#) dealer, or get your PODCASTUDIO USB online today – and become part of the global broadcast revolution!



You Are Covered

We always strive to provide the best possible Customer Experience. Our products are made in our own [MUSIC Group](#) factory using state-of-the-art automation, enhanced production workflows and quality assurance labs with the most sophisticated test equipment available in the world. As a result, we have one of the lowest product failure rates in the industry, and we confidently back it up with a generous [3-Year Warranty program](#).

PODCASTUDIO USB

Complete PODCASTUDIO Bundle with
USB/Audio Interface



PODCASTUDIO USB

Complete PODCASTUDIO Bundle with
USB/Audio Interface



PODCASTUDIO USB

Complete PODCASTUDIO Bundle with
USB/Audio Interface



PODCASTUDIO USB

Complete PODCASTUDIO Bundle with
USB/Audio Interface



PODCASTUDIO USB

Complete PODCASTUDIO Bundle with
USB/Audio Interface



PODCASTUDIO USB

Complete PODCASTUDIO Bundle with
USB/Audio Interface



For service, support or more information contact the BEHRINGER location nearest you:


Europe
MUSIC Group Services UK
Tel: +44 156 273 2290
Email: CARE@music-group.com

USA/Canada
MUSIC Group Services NV Inc.
Tel: +1 702 800 8290
Email: CARE@music-group.com

Japan
MUSIC Group Services JP K.K.
Tel: +81 3 6231 0454
Email: CARE@music-group.com

MUSIC Group accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and DDA are trademarks or registered trademarks of MUSIC Group IP Ltd.
© MUSIC Group IP Ltd. 2016 All rights reserved.



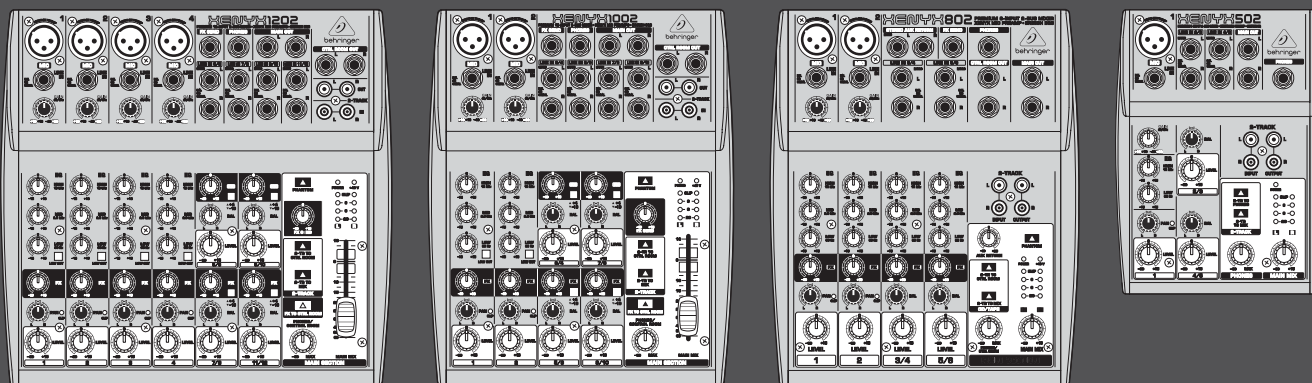

User Manual



XENYX

1202/1002/802/502

Premium 12/10/8/5-Input 2-Bus Mixer
with XENYX Mic Preamps and British EQs

Table of Contents

Thank you	2
Important Safety Instructions	3
Legal Disclaimer	3
Limited warranty	3
1. Introduction	4
1.1 General mixing console functions	4
1.2 The user's manual	4
1.3 Before you get started	4
2. Control Elements and Connectors	5
2.1 Mono channels	5
2.2 Stereo channels	6
2.3 Connector panel and main section	7
3. Installation	8
3.1 Mains connection	8
3.2 Audio connections	9
4. Specifications	10

Thank you

Congratulations! In purchasing our XENYX 1202/1002/802/502 you have acquired a mixing console whose small size belies its incredible versatility and audio performance.

The XENYX Series represents a milestone in the development of mixing console technology. With the new XENYX microphone preamps including phantom power as an option, balanced line inputs and a powerful effects section, the mixing consoles in the XENYX Series are optimally equipped for live and studio applications. Owing to state-of-the-art circuitry your XENYX console produces a warm analog sound that is unrivalled. With the addition of the latest digital technology these best-in-class consoles combine the advantages of both analog and digital technology.

EN Important Safety Instructions



Terminals marked with this symbol carry electrical current of sufficient magnitude to constitute risk of electric shock.

Use only high-quality professional speaker cables with ¼" TS or twist-locking plugs pre-installed. All other installation or modification should be performed only by qualified personnel.



This symbol, wherever it appears, alerts you to the presence of uninsulated dangerous voltage inside the enclosure - voltage that may be sufficient to constitute a risk of shock.



This symbol, wherever it appears, alerts you to important operating and maintenance instructions in the accompanying literature. Please read the manual.



Caution

To reduce the risk of electric shock, do not remove the top cover (or the rear section).

No user serviceable parts inside. Refer servicing to qualified personnel.



Caution

To reduce the risk of fire or electric shock, do not expose this appliance to rain and moisture. The apparatus shall not be exposed to dripping or splashing liquids and no objects filled with liquids, such as vases, shall be placed on the apparatus.



Caution

These service instructions are for use by qualified service personnel only.

To reduce the risk of electric shock do not perform any servicing other than that contained in the operation instructions. Repairs have to be performed by qualified service personnel.

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.

9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.

10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.

11. Use only attachments/accessories specified by the manufacturer.



12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid

injury from tip-over.

13. Unplug this apparatus during lightning storms or when unused for long periods of time.

14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

15. The apparatus shall be connected to a MAINS socket outlet with a protective earthing connection.

16. Where the MAINS plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.



TO BIND MUSIC GROUP BY ANY EXPRESS OR IMPLIED UNDERTAKING OR REPRESENTATION. THIS MANUAL IS COPYRIGHTED. NO PART OF THIS MANUAL MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING AND RECORDING OF ANY KIND, FOR ANY PURPOSE, WITHOUT THE EXPRESS WRITTEN PERMISSION OF MUSIC GROUP IP LTD.

ALL RIGHTS RESERVED.

© 2013 MUSIC Group IP Ltd.

Trident Chambers, Wickhams Cay, P.O. Box 146, Road Town, Tortola, British Virgin Islands

LIMITED WARRANTY

For the applicable warranty terms and conditions and additional information regarding MUSIC Group's Limited Warranty, please see complete details online at www.music-group.com/warranty.

LEGAL DISCLAIMER

TECHNICAL SPECIFICATIONS AND APPEARANCES ARE SUBJECT TO CHANGE WITHOUT NOTICE AND ACCURACY IS NOT GUARANTEED. BEHRINGER, KLARK TEKNIK, MIDAS, BUGERA, AND TURBOSOUND ARE PART OF THE MUSIC GROUP (MUSIC-GROUP.COM). ALL TRADEMARKS ARE THE PROPERTY OF THEIR RESPECTIVE OWNERS. MUSIC GROUP ACCEPTS NO LIABILITY FOR ANY LOSS WHICH MAY BE SUFFERED BY ANY PERSON WHO RELIES EITHER WHOLLY OR IN PART UPON ANY DESCRIPTION, PHOTOGRAPH OR STATEMENT CONTAINED HEREIN. COLORS AND SPECIFICATIONS MAY VARY FROM ACTUAL PRODUCT. MUSIC GROUP PRODUCTS ARE SOLD THROUGH AUTHORIZED FULLFILLERS AND RESELLERS ONLY. FULLFILLERS AND RESELLERS ARE NOT AGENTS OF MUSIC GROUP AND HAVE ABSOLUTELY NO AUTHORITY

1. Introduction

XENYX Mic Preamps



The microphone channels feature high-end XENYX Mic Preamps that compare well with costly outboard preamps in terms of sound quality and dynamics and boast the following features:

- 130 dB dynamic range for an incredible amount of headroom
- A bandwidth ranging from below 10 Hz to over 200 kHz for crystal-clear reproduction of even the finest nuances
- The extremely low-noise and distortion-free circuitry guarantees absolutely natural and transparent signal reproduction
- They are perfectly matched to every conceivable microphone with up to 60 dB gain and +48 volt phantom power supply
- They enable you to use the greatly extended dynamic range of your 24-bit/192-kHz HD recorder to the full, thereby maintaining optimal audio quality

“British EQ”

The equalizers used for the XENYX Series are based on the legendary circuitry of top-notch consoles made in Britain, which are renowned throughout the world for their incredibly warm and musical sound character. Even with extreme gain settings these equalizers ensure outstanding audio properties.



Caution!

- ♦ We should like to draw your attention to the fact that extreme volumes may damage your hearing and/or your headphones or loudspeakers. Turn the MAIN MIX control and PHONES control in the main section fully counter-clockwise before you switch on the unit. Always be careful to set appropriate volume levels.

Important notes concerning installation

- ♦ The sound quality may diminish within the range of powerful broadcasting stations and high-frequency sources. Increase the distance between the transmitter and the device and use shielded cables for all connections.

1.1 General mixing console functions

A mixing console fulfils three main functions:

- **Signal processing:** Preamplification, level adjustment, mixing of effects, frequency equalization
- **Signal distribution:** Summing of signals to the aux sends for effects processing and monitor mix, distribution to one or several recording tracks, power amp(s), control room and 2-track outputs
- **Mix:** Setting the volume level, frequency distribution and positioning of the individual signals in the stereo field, level control of the total mix to match the recording devices/crossover/power amplifier(s). All other mixer functions can be included in this main function

The interface of BEHRINGER mixing consoles is optimized for these tasks enabling you to easily keep track of the signal path.

1.2 The user's manual

The user's manual is designed to give you both an overview of the controls, as well as detailed information on how to use them. In order to help you understand the links between the controls, we have arranged them in groups according to their function. The illustrations at the beginning of each chapter show the controls described in each respective chapter.

- ♦ **The block diagram supplied with the mixing console gives you an overview of the connections between the inputs and outputs, as well as the associated switches and controls.**

For the moment, just try and trace the signal path from the microphone input to the FX send connector. Don't be put off by the huge range of possibilities; it's easier than you think! If you look at the overview of the controls at the same time, you'll be able to quickly familiarize yourself with your mixing console and you'll soon be making the most of all its many possibilities.

If you need to know more about specific issues, please visit our website at <http://behringer.com>, where you'll find explanations of (for example) effects and dynamics applications.

1.3 Before you get started

1.3.1 Shipment

Your mixing console was carefully packed in the factory to guarantee safe transport. Nevertheless, we recommend that you carefully examine the packaging and its contents for any signs of physical damage, which may have occurred during transit.

- ♦ **If the unit is damaged, please do NOT return it to us, but notify your dealer and the shipping company immediately, otherwise claims for damage or replacement may not be granted.**

1.3.2 Initial operation

Be sure that there is enough space around the unit for cooling purposes and to avoid over-heating please do not place your mixing console on high-temperature devices such as radiators or power amps. The console is connected to the mains via the supplied cable. The console meets the required safety standards. Blown fuses must only be replaced by fuses of the same type and rating.

- ♦ **Never connect the XENYX to the power supply unit when the latter is connected to the mains! First connect the power supply unit to the console, then connect the power supply unit to the mains.**
- ♦ **Please note that all units must be properly grounded. For your own safety, you should never remove any ground connectors from electrical devices or power cables, or render them inoperative.**
- ♦ **Please ensure that only qualified people install and operate the mixing console. During installation and operation, the user must have sufficient electrical contact to earth, otherwise electrostatic discharges might affect the operation of the unit.**

1.3.3 Online Registration

Please register your new BEHRINGER equipment right after your purchase by visiting <http://behringer.com> and read the terms and conditions of our warranty carefully.

Should your BEHRINGER product malfunction, it is our intention to have it repaired as quickly as possible. To arrange for warranty service, please contact the BEHRINGER retailer from whom the equipment was purchased. Should your BEHRINGER dealer not be located in your vicinity, you may directly contact one of our subsidiaries. Corresponding contact information is included in the original equipment packaging (Global Contact Information/European Contact Information). Should your country not be listed, please contact the distributor nearest you. A list of distributors can be found in the support area of our website (<http://behringer.com>).

Registering your purchase and equipment with us helps us process your repair claims more quickly and efficiently.

Thank you for your cooperation!

2. Control Elements and Connectors

This chapter describes the various control elements of your mixing console. All controls, switches and connectors will be discussed in detail.

2.1 Mono channels

2.1.1 Microphone and line inputs



Fig. 2.1: Connectors and controls of mic/line inputs

MIC

Each mono input channel offers a balanced microphone input via the XLR connector and also features switchable +48 V phantom power supply for condenser microphones. The XENYX preamps provide undistorted and noise-free gain as is typically known only from costly outboard preamps.

- ◆ Please mute your playback system before you activate the phantom power supply to prevent switch-on thumps being directed to your loudspeakers. Please also note the instructions in chapter 2.3.5 "Phantom power and LED displays".

LINE IN

Each mono input also features a balanced line input on a 1/4" connector. Unbalanced devices (mono jacks) can also be connected to these inputs.

- ◆ Please remember that you can only use either the microphone or the line input of a channel at any one time. You can never use both simultaneously!

GAIN

Use the **GAIN** control to adjust the input gain. This control should always be turned fully counterclockwise whenever you connect or disconnect a signal source to one of the inputs.

2.1.2 Equalizer

All mono input channels include a 3-band equalizer, except for the 502, which is equipped with a 2-band EQ. All bands provide boost or cut of up to 15 dB. In the central position, the equalizer is inactive.

The circuitry of the British EQs is based on the technology used in the best-known top-of-the-line consoles and providing a warm sound without any unwanted side effects. The result are extremely musical equalizers which, unlike simple equalizers, cause no side effects such as phase shifting or bandwidth limitation, even with extreme gain settings of ± 15 dB.




Fig. 2.2: The equalizer of the mono input channels

EQ

The upper (HIGH) and the lower band (LOW) are shelving filters that increase or decrease all frequencies above or below their cut-off frequency. The cut-off frequencies of the upper and lower band are 12 kHz and 80 Hz respectively. The mid band (1202/1002/802) is configured as a peak filter with a center frequency of 2.5 kHz.

LOW CUT

In addition, the mono channels (1202 and 1002) are equipped with a steep **LOW CUT** filter (slope at 18 dB/oct., -3 dB at 75 Hz) designed to eliminate unwanted low-frequency signal components.

2.1.3 FX sends, panorama and level adjustment




Fig. 2.3: The FX send/panorama/level controls

FX (1202/1002/802 only)

FX sends (or **AUX** sends) enable you to feed signals via a variable control from one or more channels and sum these signals to a bus. The bus appears at the console's FX send output and can be fed from there to an external effects device. The return from the effects unit is then brought back into the console on the aux return connectors (802) or normal channel inputs. Each FX send is mono and features up to +15 dB gain.

As the name suggests, the FX sends of the XENYX mixing consoles are intended to drive effects devices (reverb, delay, etc) and are therefore configured post-fader. This means that the mix between dry signal and effect remains at the level determined by the channel's aux send, irrespective of the channel fader setting. If this were not the case, the effects signal of the channel would remain audible even when the fader is lowered to zero.

PAN

The **PAN** control determines the position of the channel signal within the stereo image. This control features a constant-power characteristic, which means the signal is always maintained at a constant level, irrespective of position in the stereo panorama.

LEVEL

The **LEVEL** control determines the level of the channel signal in the main mix.

CLIP

The **CLIP** LED's of the mono channels illuminate when the input signal is driven too high, which could cause distortion. If this happens, use the **GAIN** control to reduce the preamp level until the LED does not light anymore.

2.2 Stereo channels

2.2.1 Stereo line inputs




Fig. 2.4: Stereo line inputs

LINE IN

Each stereo channel has two balanced line level inputs on 1/4" jacks for left and right channels. If only the jack marked "L" (left) is used, the channel operates in mono. The stereo channels are designed to handle typical line level signals.

Both inputs will also accept unbalanced jacks.

2.2.2 Equalizer stereo channels (802)

The XENYX 802 features a stereo 3-band EQ in each stereo channel. The filter characteristics and cut-off frequencies are the same as those in the mono channels.

A stereo EQ is highly preferable to two mono equalizers. When working on a stereo signal, as two separate EQ's will usually produce an unwanted discrepancy between the left and right channels.




Fig. 2.5: The equalizer of the stereo input channels

2.2.3 FX sends, balance and level adjustment

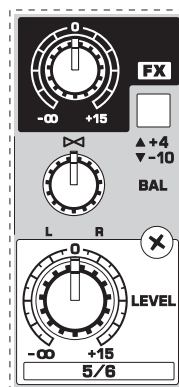


Fig. 2.6: The FX send/balance/level controls

FX

The **FX** sends of the stereo channels function similar to those of the mono channels. However, since the FX send buses are both mono, a mono sum is first taken from the stereo input before it is sent to the FX bus. The 502 is not equipped with FXsends.

BAL

The **BAL**(ANCE) control determines the levels of left and right input signals relative to each other before both signals are then routed to the main stereo mix bus. If a channel is operated in mono via the left line input, this control has the same function as the **PAN** control used in the mono channels.

LEVEL

The **LEVEL** control determines the volume of the channel being sent to the main mix.

+4/-10

The stereo inputs of the XENYX 1202 and 1002 have an input sensitivity switch which selects between **+4 dBu** and **-10 dBV**. At -10 dBV (home-recording level), the input is more sensitive (requires less level to drive it) than at +4 dBu (studio level).

2.3 Connector panel and main section

2.3.1 Send/return effects path




Fig. 2.7: FX send/return connectors




Fig. 2.8: FX send/return controls

AUX RETURN

802 only: the **STEREO AUX RETURN** connectors are used to bring the output of the external effects device (whose input is derived from the aux sends) back into the console. You can instead use these connectors as additional inputs, but any effects device will then have to be brought back into the console via a normal stereo channel. This does, however, give you the ability to use the channel EQ on the effects return signal if you wish.

- When using a stereo channel as effects return path, the FX control of the relevant channel should generally be turned fully down to avoid undesirable feedback.

If only the left connector is used, the AUX RETURN automatically operates in mono. Use the **AUX RETURN** control to determine how much of the effects signal is sent to the main mix.

FX SEND

The **FX SEND** output (does not apply for 502) should be connected to the input of an external effects unit. The post-fader FX signal you created using the input channel FX controls is sent to the effects unit via the **FX SEND** output. Use the **FX SEND** control of the main section to adjust the overall send level (1002 and 1202 only).

2.3.2 Monitor and main mix

PHONES/CONTROL ROOM

The stereo **PHONES** jack (at the top of the connector panel) is where you connect headphones. The unbalanced **CTRL ROOM OUT** jacks carry the summed effects and main mix signals, as well as soloed channel signals. The **PHONES/CONTROL ROOM** control adjusts the level of both headphones and main monitor outputs. The 502 is not equipped with control room outputs.




Fig. 2.9: Monitor/main mix connectors

MAIN MIX

The **MAIN OUT** connectors are unbalanced mono jacks. The main mix signal appears here at a level of 0 dBu. The **MAIN MIX** fader adjusts the volume of these outputs. The XENYX 802 and 502 mixing consoles feature a rotary control for this purpose.

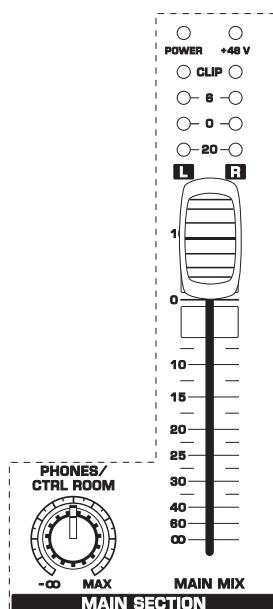


Fig. 2.10: Monitor control and main mix fader

2.3.3 2-Track connectors

2-TRACK INPUT

The **2-TRACK INPUTs** are used to bring an external signal source (e.g. CD player, tape deck, etc.) into the console. They can also be used as a standard stereo line input, so the output of a second XENYX or BEHRINGER ULTRALINK PRO MX882 can be connected.




Fig. 2.11: 2-Track input/output

Alternatively the line or tape output of a hi-fi amplifier with source selection switch could also be hooked up here, allowing you to easily listen to additional sources.

2-TRACK OUTPUT

These connectors are wired in parallel with the MAIN OUT and carry the main mix signal (unbalanced). Connect the **2-TRACK OUTPUT** to the inputs of your recording device. The output level is adjusted via the high-precision MAIN MIX fader or rotary control (802).

2.3.4 Signal assignment




Fig. 2.12: Assignment switches of the main section

2-TR TO MIX

When the **2-TR TO MIX** switch is depressed, the 2-track input is assigned to the main mix providing an additional input for tape machines, MIDI instruments or other signal sources that do not require any processing.

2-TR TO CTRL ROOM (502: 2-TR TO PHONES)

Press the **2-TR TO CTRL ROOM/PHONES** switch if you want to monitor the 2-track input via the CTRL ROOM OUT. This provides an easy way to monitor signals coming back from tape to ensure that they are recording correctly.

- ⚠ If you are recording a signal via the 2-TRACK OUTPUT and wish to listen to this simultaneously via the 2-TRACK INPUT, do not use the 2-TR TO MIX switch. Doing this would create a feedback loop, since the signal would be routed, via the main mix, back to tape via the 2-TRACK OUTPUT. To monitor the 2-TRACK INPUT, use the 2-TR TO CTRL ROOM switch to assign the tape signal to the monitor(s) or headphones. This will avoid the tape signal being routed to the 2-TRACK OUTPUT.

FX TO CTRL

If you want to monitor only the FX send signal in your headphones or monitor speaker(s), press the **FX TO CTRL** switch. This mutes the main mix signal while routing the FX SEND output to the monitor(s). The XENYX 802 and 502 do not feature this switch.

2.3.5 Phantom power and LED displays

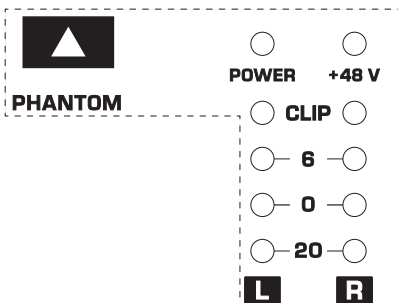


Fig. 2.13: Phantom power and control LEDs

+48 V

The red +48 V LED lights up when phantom power is on. The **PHANTOM** switch activates the phantom power supply on the XLR connectors of all mono channels.

- ⚠ Please do not connect microphones to the mixer (or the stagebox/wallbox) as long as the phantom power supply is switched on. Connect the micro-phones before you switch on the power supply. In addition, the monitor/PA loudspeakers should be muted before you activate the phantom power supply. After switching on, wait approx. one minute in order to allow system stabilization.

POWER

The blue **POWER** LED indicates that the console is powered on.

Level indicator

The high-precision 4-segment display accurately displays the relevant signal level.

LEVEL SETTING: To correctly set the gains of the channels, first set the LEVEL controls of the input channels to their center positions (0 dB). Then use the GAIN controls to increase the input amplification until signal peaks show 0 dB on the level meter.

When recording to digital recorders, the recorder's peak meter should not go into overload. While analog recorders can be overloaded to some extent, creating only a certain amount of distortion (which is common and often desirable), digital recorders distort quickly when overloaded. In addition, digital distortion is not only undesirable, but also renders your recording completely useless.

- ⚠ The peak meters of your XENYX display the level virtually independent of frequency. A recording level of 0 dB is recommended for all signal types.

3. Installation

3.1 Mains connection

AC POWER IN

Connect the power supply to the 3-pin mains connector on the rear of the console. Use the AC adapter supplied to connect the console to the mains. The adapter complies with all applicable safety standards.

- ⚠ Please use only the power supply unit provided with the console.
- ⚠ Never connect the XENYX to the power supply unit while the latter is connected to the mains! First connect the console to the power supply unit, then connect the power supply unit to the mains.
- ⚠ Please note that both the power supply unit and the mixing console heat up considerably during operation. This is completely normal.

3.2 Audio connections

You will need a large number of cables for different applications. The illustrations below show how the connectors should be wired. Be sure to use only high-grade cables.

Please use commercial RCA cables to connect the 2-track inputs and outputs.

You can, of course, also connect unbalanced devices to the balanced inputs/outputs. To do this, use either mono plugs or stereo plugs with the ring and sleeve bridged (pins 1 and 3 in the case of XLR connectors).

⚠ **Caution! Never use unbalanced XLR connectors (PIN 1 and 3 connected) on the MIC input connectors when using the phantom power supply.**

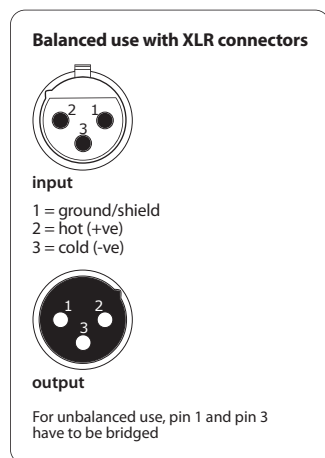


Fig. 3.1: XLR connections

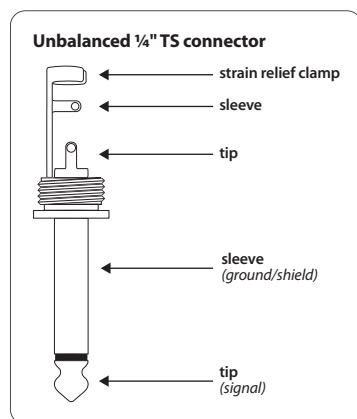


Fig. 3.2: 1/4" mono plug

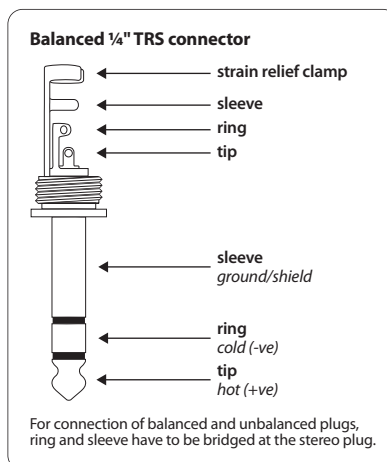


Fig. 3.3: 1/4" stereo plug

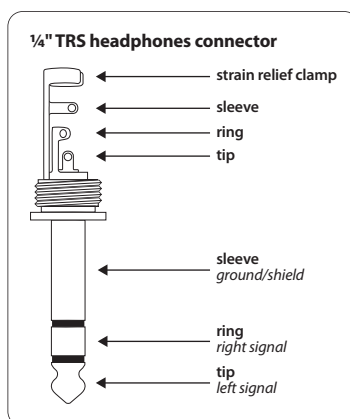


Fig. 3.4: Stereo plug for headphones connection

4. Specifications

Mono Inputs

Microphone Inputs (XENYX Mic preamp)

Type	XLR connector, electronically balanced, discrete input circuit
------	--

Mic E.I.N.¹ (20 Hz - 20 kHz)

@ 0 Ω source resistance	-134 dB / 135.7 dB A-weighted
@ 50 Ω source resistance	-131 dB / 133.3 dB A-weighted
@ 150 Ω source resistance	-129 dB / 130.5 dB A-weighted

Frequency Response

<10 Hz - 150 kHz	-1 dB
<10 Hz - 200 kHz	-3 dB
Gain range	+10 dB to +60 dB
Max. input level	+12 dBu @ +10 dB GAIN
Impedance	approx. 2.6 k Ω balanced
Signal-to-noise ratio	110 dB / 112 dB A-weighted (0 dBu In @ +22 dB GAIN)
Distortion (THD+N)	0.005% / 0.004% A-weighted

Line Input

Type	¼" TRS jack, electronically balanced
Impedance	approx. 20 k Ω balanced, approx. 10 k Ω unbalanced
Gain range	-10 dB to +40 dB
Max. input level	+22 dBu @ 0 dB GAIN

Fade-Out Attenuation² (Crosstalk Attenuation)

Main fader closed	90 dB
Channel muted	89.5 dB
Channel fader muted	89 dB

Frequency Response (Mic In → Main Out)

<10 Hz - 90 kHz	+0 dB / -1 dB
<10 Hz - 160 kHz	+0 dB / -3 dB

Stereo Inputs

Type	¼" TRS jack, electronically balanced
Impedance	approx. 20 k Ω
Max. input level	+22 dBu

Equalizer

EQ Mono Channels

LOW	80 Hz / ± 15 dB
MID	2.5 kHz / ± 15 dB
HIGH	12 kHz / ± 15 dB

EQ Stereo Channels

LOW	80 Hz / ± 15 dB
MID	2.5 kHz / ± 15 dB
HIGH	12 kHz / ± 15 dB

Send/Return

Aux Sends

Type	¼" TS jack, unbalanced
Impedance	approx. 120 Ω
Max. output level	+22 dBu

Stereo Aux Returns

Type	¼" TRS jack, electronically balanced
Impedance	approx. 20 k Ω balanced / approx. 10 k Ω unbalanced
Max. input level	+22 dBu

Outputs

Main Outputs

Type	¼" TRS jack, unbalanced
Impedance	approx. 120 Ω unbalanced
Max. output level	+22 dBu

Control Room Outputs

Type	¼" TS jack, unbalanced
Impedance	approx. 120 Ω
Max. output level	+22 dBu

Headphones Output

Type	¼" TRS jack, unbalanced
Max. output level	+19 dBu / 150 Ω (+25 dBm)

Main Mix System Data³ (Noise)

Main mix @ $-\infty$, channel fader @ $-\infty$	-106 dB / -109 dB A-weighted
Main mix @ 0 dB, channel fader @ $-\infty$	-95 dB / -98 dB A-weighted
Main mix @ 0 dB, channel fader @ 0 dB	-84 dB / -87 dB A-weighted

Power Supply**1002/802/502**

Power consumption	13 W
-------------------	------

USA/Canada

Adapter	BEHRINGER PSU MX3UL
Mains voltage	120 V~, 60 Hz

Europe/U.K./Australia

Adapter	BEHRINGER PSU MX3EU
Mains voltage	230 V~, 50 Hz

China

Adapter	BEHRINGER PSU MX3CC
Input	220 V~ 50 Hz; 80 mA
Output	2 x 18.5 V~, 2 x 150 mA

Korea

Adapter	BEHRINGER PSU MX3KR
Mains voltage	220 V~, 60 Hz

Japan

Adapter	BEHRINGER PSU MX3JP
Mains voltage	100 V~, 50/60 Hz

1202

Power consumption	20 W
-------------------	------

USA/Canada

Adapter	BEHRINGER PSU MX5UL
Mains voltage	120 V~, 60 Hz

Europe/U.K./Australia

Adapter	BEHRINGER PSU MX5EU
Mains voltage	230 V~, 50 Hz

China

Adapter	BEHRINGER PSU MX5CC
Input	220 V~ 50 Hz; 150 mA
Output	2 x 17.5 V~, 2 x 650 mA

Korea

Adapter	BEHRINGER PSU MX5KR
Mains voltage	220 V~, 60 Hz

Japan

Adapter	BEHRINGER PSU MX5JP
Mains voltage	100 V~, 50/60 Hz

Physical/Weight**1202**

Dimensions (H x W x D)	1.9 x 9.5 x 8.7" 47 x 220 x 242 mm
------------------------	---------------------------------------

Weight (Net)	4.8 lbs / 2.2 kg
--------------	------------------

1002

Dimensions (H x W x D)	1.9 x 7.4 x 8.7" 47 x 189 x 220 mm
------------------------	---------------------------------------

Weight (Net)	3.5 lbs / 1.6 kg
--------------	------------------

802

Dimensions (H x W x D)	1.9 x 7.4 x 8.7" 47 x 189 x 220 mm
------------------------	---------------------------------------

Weight (Net)	3.5 lbs / 1.6 kg
--------------	------------------

502

Dimensions (H x W x D)	1.9 x 5.3 x 7" 47 x 134 x 177 mm
------------------------	-------------------------------------

Weight (Net)	2.6 lbs / 1.2 kg
--------------	------------------

1 Equivalent Input Noise


2 Measuring conditions: 1 kHz rel. to 0 dBu; 20 Hz - 20 kHz; line input; main output; unity gain.

3 20 Hz - 20 kHz; measured at main output. Channels 1 - 4 unity gain; EQ flat; all channels on main mix; channels 1/3 as far left as possible; channels 2/4 as far right as possible; reference = +6 dBu.

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.



We Hear You

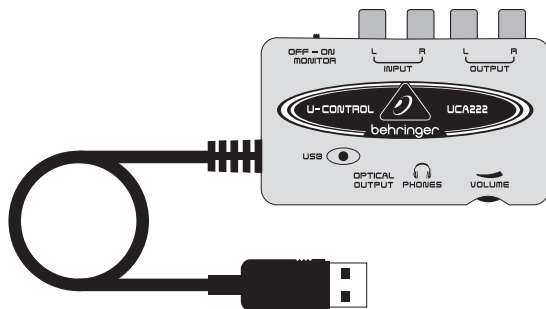

U-CONTROL UCA222

Ultra-Low Latency 2 In/2 Out USB Audio Interface with Digital Output

Table of Contents

Thank you	2
Important Safety Instructions	3
Legal Disclaimer	4
Limited Warranty	4
1. Before You Get Started	5
2. System Requirements	6
3. Controls and Connectors	6
4. Software Installation	7
5. Basic Operation	7
6. Application Diagrams	8
7. Audio Connections	10
8. Specifications	10

Thank you

Thank you for choosing the UCA222 U-CONTROL audio interface. The UCA222 is a high-performance interface that includes a USB connector, making it an ideal sound card for your laptop computer or an essential recording/playback component for studio environments that involve desktop computers. The UCA222 is PC and Mac-compatible, therefore no separate installation procedure is required. Thanks to its robust construction and compact dimensions, the UCA222 is also ideal for traveling. The separate headphones output allows you to play back your recordings at any time, even if you don't happen to have any loudspeakers available. Two inputs and outputs as well as the S/PDIF output give you total connecting flexibility to mixing consoles, loudspeakers or headphones. Power is supplied to the unit via the USB interface and the LED gives you a quick check that the UCA222 is properly connected. The UCA222 is the ideal extra for every computer musician.

EN Important Safety Instructions



Terminals marked with this symbol carry electrical current of sufficient magnitude to constitute risk of electric shock. Use only high-quality professional speaker cables with ¼" TS or twist-locking plugs pre-installed. All other installation or modification should be performed only by qualified personnel.



This symbol, wherever it appears, alerts you to the presence of uninsulated dangerous voltage inside the enclosure - voltage that may be sufficient to constitute a risk of shock.



This symbol, wherever it appears, alerts you to important operating and maintenance instructions in the accompanying literature. Please read the manual.



Caution

To reduce the risk of electric shock, do not remove the top cover (or the rear section). No user serviceable parts inside. Refer servicing to qualified personnel.



Caution

To reduce the risk of fire or electric shock, do not expose this appliance to rain and moisture. The apparatus shall not be exposed to dripping or splashing liquids and no objects filled with liquids, such as vases, shall be placed on the apparatus.



Caution

These service instructions are for use by qualified service personnel only. To reduce the risk of electric shock do not perform any servicing other than that contained in the operation instructions. Repairs have to be performed by qualified service personnel.

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.

7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.

8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.

9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.

10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.

11. Use only attachments/accessories specified by the manufacturer.



12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus.

When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.

13. Unplug this apparatus during lightning storms or when unused for long periods of time.

14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

15. The apparatus shall be connected to a MAINS socket outlet with a protective earthing connection.

16. Where the MAINS plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.



17. Correct disposal of this product: This symbol indicates that this product must not be disposed of with household waste, according to the WEEE

Directive (2012/19/EU) and your national

law. This product should be taken to a collection center licensed for the recycling of waste electrical and electronic equipment (EEE). The mishandling of this type of waste could have a possible negative impact on the environment and human health due to potentially hazardous substances that are generally associated with EEE. At the same time, your cooperation in the correct disposal of this product will contribute to the efficient use of natural resources. For more information about where you can take your waste equipment for recycling, please contact your local city office, or your household waste collection service.

18. Do not install in a confined space, such as a book case or similar unit.

19. Do not place naked flame sources, such as lighted candles, on the apparatus.

20. Please keep the environmental aspects of battery disposal in mind. Batteries must be disposed of at a battery collection point.

21. Use this apparatus in tropical and/or moderate climates.

LEGAL DISCLAIMER

MUSIC Tribe accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice. All trademarks are the property of their respective owners. MIDAS, KLARK TEKNIK, LAB GRUPPEN, LAKE, TANNOY, TURBOSOUND, TC ELECTRONIC, TC HELICON, BEHRINGER, BUGERA and COOLAUDIO are trademarks or registered trademarks of MUSIC Tribe Global Brands Ltd. © MUSIC Tribe Global Brands Ltd. 2018 All rights reserved.

LIMITED WARRANTY

For the applicable warranty terms and conditions and additional information regarding MUSIC Tribe's Limited Warranty, please see complete details online at musictri.be/warranty.

1. Before You Get Started

1.1 Shipment

- ◆ Your UCA222 was carefully packed at the assembly plant to assure secure transport. Should the condition of the cardboard box suggest that damage may have taken place, please inspect the unit immediately and look for physical indications of damage.
- ◆ Damaged equipment should NEVER be sent directly to us. Please inform the dealer from whom you acquired the unit immediately as well as the transportation company from which you took delivery. Otherwise, all claims for replacement/repair may be rendered invalid.
- ◆ Please always use the original packaging to avoid damage due to storage or shipping.
- ◆ Never let unsupervised children play with the equipment or with its packaging.
- ◆ Please dispose of all packaging materials in an environmentally friendly fashion.

1.2 Initial operation

Please make sure the unit is provided with sufficient ventilation, and never place the UCA222 on top of an amplifier or in the vicinity of a heater to avoid the risk of overheating.

The current supply is made via the USB connecting cable, so that there is no external power supply unit required. Please adhere to all required safety precautions.

1.3 Online registration

Please register your new BEHRINGER equipment right after your purchase by visiting <http://behringer.com> and read the terms and conditions of our warranty carefully.

Should your BEHRINGER product malfunction, it is our intention to have it repaired as quickly as possible. To arrange for warranty service, please contact the BEHRINGER retailer from whom the equipment was purchased. Should your BEHRINGER dealer not be located in your vicinity, you may directly contact one of our subsidiaries. Corresponding contact information is included in the original equipment packaging (Global Contact Information/European Contact Information). Should your country not be listed, please contact the distributor nearest you. A list of distributors can be found in the support area of our website (<http://behringer.com>).

Registering your purchase and equipment with us helps us process your repair claims more quickly and efficiently.

Thank you for your cooperation!

2. System Requirements

The UCA222 is PC and Mac-compatible. Therefore, no installation procedure or drivers are required for the correct functioning of the UCA222.


To work with the UCA222, your computer must fulfill the following minimum requirements:

PC	Mac
Intel or AMD CPU, 400 MHz or higher	G3, 300 MHz or higher
Minimum 128 MB RAM	Minimum 128 MB RAM
USB 1.1 interface	USB 1.1 interface
Windows XP, 2000	Mac OS 9.0.4 or higher, 10.X or higher

2.1 Hardware connection

Use the USB connecting cable to connect the unit to your computer. The USB connection also supplies the UCA222 with current. You can connect a variety of devices and equipment to the inputs and outputs.

3. Controls and Connectors

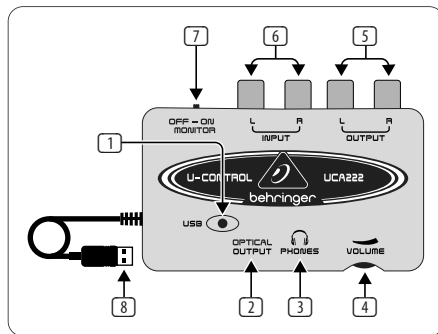

- 1 **POWER LED** – Indicates the status of the USB power supply.
- 2 **OPTICAL OUTPUT** – The Toslink jack carries an S/PDIF signal which can be connected via a fiber optic cable.
- 3 **PHONES** – Connect a standard pair of headphones equipped with a 1/8" mini plug.
- 4 **VOLUME** – Adjusts the volume level of the headphones output. Turn the control fully to the left before you connect the headphones to avoid hearing damage caused by high volume settings. Turn the control to the right to increase the volume.

- 5 **OUTPUT** – Connect to a speaker system using stereo RCA cables to monitor the audio output from the computer.
- 6 **INPUT** – Connect desired recording signal using audio cables with RCA connectors.
- 7 **OFF/ON MONITOR** – With the MONITOR switch OFF, the headphone output receives the signal from the computer over the USB port (same as the RCA output jacks). With the MONITOR switch ON, the headphones receive the signal connected to the RCA INPUT jacks.
- 8 **USB CABLE** – Sends information to and from your computer and the UCA222. It also provides power to the device.

4. Software Installation


- This device requires no special setup or drivers, just plug it into a free USB port on a PC or Mac.
 - The UCA222 comes with a free version of Audacity editing software. This will help make the transfer process quick and simple. Simply insert the CD into your CD-ROM drive and install the software. The CD also contains VST plug-ins, ASIO drivers and various freeware.
- ♦ **Note** – When the UCA222 is bundled with other BEHRINGER products, the included software may vary. In the instance that the ASIO drivers are not included, you may download these from our website at behringer.com.

5. Basic Operation

The UCA222 provides an easy interface between your computer, mixer and monitoring system. Follow these steps for basic operation:

- 1) Connect the UCA222 to the computer by plugging the USB cable into a free USB port. The power LED will light automatically.
- 2) Connect the audio source that is to be recorded, such as a mixer, preamp, etc. to the INPUT stereo RCA jacks.
- 3) Plug a pair of headphones into the 1/8" PHONES jack and adjust the volume with the adjacent control. You may also monitor the output by plugging a pair of powered speakers into the OUTPUT stereo RCA jacks.
- 4) You may also send the stereo signal in digital audio format (S/PDIF) to an external recording device via the OPTICAL OUTPUT using a Toslink fiber optic cable.


6. Application Diagrams

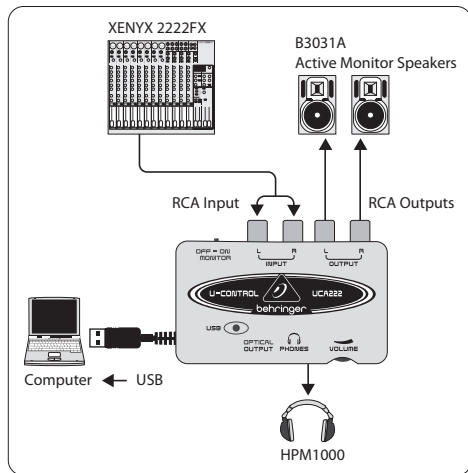

Using a mixer to record in a studio environment:

The most common application for the UCA222 is doing studio recording with a mixer. This will allow you to record several sources at once, listen to the playback, and record more tracks in sync with the original take(s).

- Connect the mixer's TAPE OUT to the INPUT RCA jacks on the UCA222. This will allow you to capture the overall mix.
- Plug the USB cable into a free USB port on your computer. The POWER LED will light up.
- Connect a pair of powered monitor speakers to the UCA222 OUTPUT RCA jacks. Depending on what type of inputs your speakers accept, you may need an adapter.
- You may also monitor the input signal with a pair of headphones instead of or in addition to the monitor speakers. Turn the OFF/ON MONITOR switch to the 'ON' position. Plug a pair of headphones into the PHONES jack and adjust the volume with the adjacent control. This will be preferable if the mixer and computer are in the same room as the instruments being recorded.
- Take some time to adjust each channel level and EQ to ensure a good balance between the instruments/sources. Once the mix has been recorded you will be unable to make adjustments to just one channel.
- Set the recording program to record input from the UCA222.
- Press record and let the music rip!

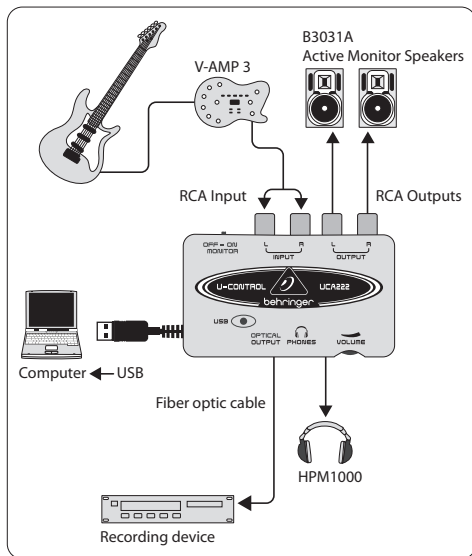

Recording with a preamp such as the V-AMP 3:

Preamps such as the V-AMP 3 provide a great way to record a wide selection of high-quality guitar sounds without the hassle of placing a mic in front of a conventional amp. They also allow you to record late at night without tempting your roommates or neighbors to strangle you with your own guitar cable.


- Plug a guitar into the instrument input of the V-AMP 3 using a standard ¼" instrument cable.
- Connect the stereo ¼" outputs on the V-AMP 3 to the stereo RCA inputs on the UCA222. This will likely require adaptors. You may also use the stereo RCA to ¼" TRS cable that is included in the V-AMP 3/UCA222 package bundle to connect from the V-AMP 3 headphone output to the UCA222 RCA inputs.
- Plug the USB cable into a free USB port on your computer. The POWER LED will light up.
- Adjust the output signal level on the V-AMP 3.
- Set the recording program to record input from the UCA222.
- Press record and wait!

7. Audio Connections


Although there are various ways to integrate the UCA222 into your studio or live set-up, the audio connections to be made will basically be the same in all cases:

7.1 Wiring

Please use standard RCA cables to connect the UCA222 to other equipment:

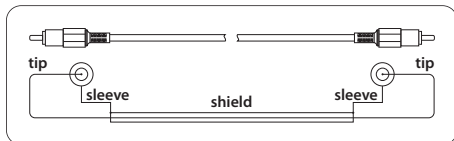

You can also use a ¼" adapter cable:

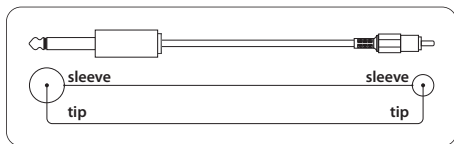

8. Specifications

Line In

Connectors	RCA, unbalanced
Input impedance	approx. 27 k Ω
Max. input level	2 dBV

Line Out

Connectors	RCA, unbalanced
Output impedance	approx. 400 Ω
Max. output level	2 dBV

Digital Output

Socket	Toslink, optical cable
Output format	S/PDIF

Phones Out

Socket	⅛" TRS stereo jack
Output impedance	approx. 50 Ω
Max. output pegel	-2 dBu, 2 x 3.7 mW @ 100 Ω

USB 1.1

Connectors	type A
------------	--------

Digital Processing

Converter	16-bit converter
Sample rate	32.0 kHz, 44.1 kHz, 48.0 kHz

System Data

Frequency response	10 Hz to 20 kHz, ± 1 dB @ 44.1 kHz sample rate 10 Hz to 22 kHz, ± 1 dB @ 48.0 kHz sample rate
THD	0.05% typ. @ -10 dBV, 1 kHz
Crosstalk	-77 dB @ 0 dBV, 1 kHz
Signal-to-noise ratio	A/D 89 dB typ. @ 1 kHz, A-weighted D/A 96 dB typ. @ 1 kHz, A-weighted

Power Supply

USB connection	5 V, 100 mA max.
----------------	------------------

Dimensions/Weight

Dimensions (H x W x D)	approx. 0.87 x 2.36 x 3.46" approx. 22 x 60 x 88 mm
Weight	approx. 0.10 kg

BEHRINGER always takes great care to ensure the highest standard of quality. Any modifications which may be necessary will be made without prior notification. Technical data and appearance of the equipment can therefore differ from the details or illustrations shown.

FEDERAL COMMUNICATIONS COMMISSION COMPLIANCE INFORMATION



Responsible Party Name: **MUSIC Tribe Commercial NV Inc.**

Address: **5270 Procyon Street
Las Vegas, NV 89118
USA**

Phone No.: **+1 702 800 8290**

U-CONTROL UCA222

complies with the FCC rules as mentioned in the following paragraph:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment

generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Important information:


Changes or modifications to the equipment not expressly approved by MUSIC Tribe can void the user's authority to use the equipment.

We Hear You




ULTRAVOICE XM8500 Technical Specifications

Dynamic Cardioid Vocal Microphone

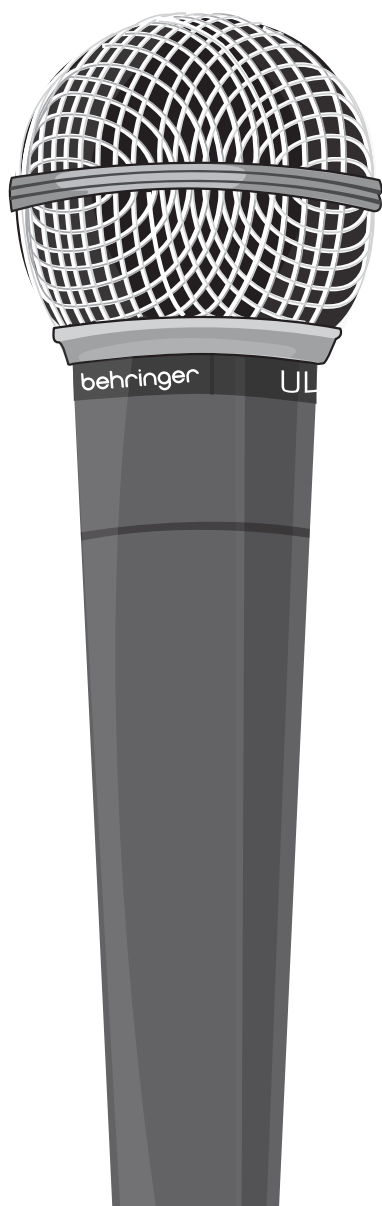

FEATURES

- Dynamic vocal microphone with smooth mid-frequency presence rise for excellent voice projection
- Ultra-wide frequency response for brilliant and transparent sound
- Extremely high signal output lets your voice cut through
- Cardioid characteristic minimizes background noise and feedback
- Shock mount system to cut down handling noise
- Integrated spherical wind and pop noise filter
- Microphone stand adapter and impact-resistant carrying case included
- High-quality components and exceptionally rugged construction ensure long life
- Conceived and designed by BEHRINGER Germany

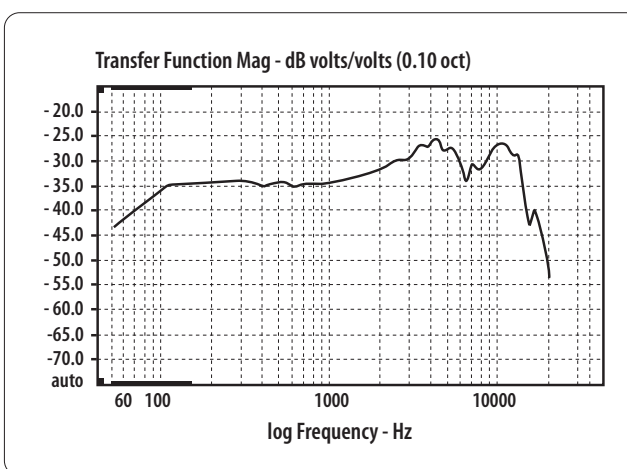

SPECIFICATIONS

Type	cardioid dynamic microphone
Impedance	150 Ohms
Sensitivity	- 70 dB
Bandwidth	50 Hz to 15 kHz
Connector	gold-plated XLR
Weight	approx. 240 g

BEHRINGER is constantly striving to maintain the highest professional standards. As a result of these efforts, modifications may be made from time to time to existing products without prior notice. Specifications and appearance may differ from those listed or illustrated.

© 2011 MUSIC Group IP Ltd. Technical specifications and appearance are subject to change without notice. The information contained herein is correct at the time of printing. All trademarks are the property of their respective owners. MUSIC Group IP Ltd. accepts no liability for any damages or loss which may be suffered by any person who relies either wholly or in part upon any description, photograph or statement contained herein.