





Flush Mount Amplifier

A0350

The A0350 flush mount amplifier can be used with Channel Vision's CAT5 audio hubs to provide a powerful 100 watts in the listening zone. Alternatively, the A0350 can be added to the SP525, SP650, and SP800 Free Standing Speakers to create a high-quality amplified speaker system.

Features

- 100 watt integrated class D amplifier
- Pre-amp audio outputs for easy connection to powered subwoofer
- Local audio input to override the CAT5 audio input
- Input for compatibility with Channel Vision's CAT5 audio systems

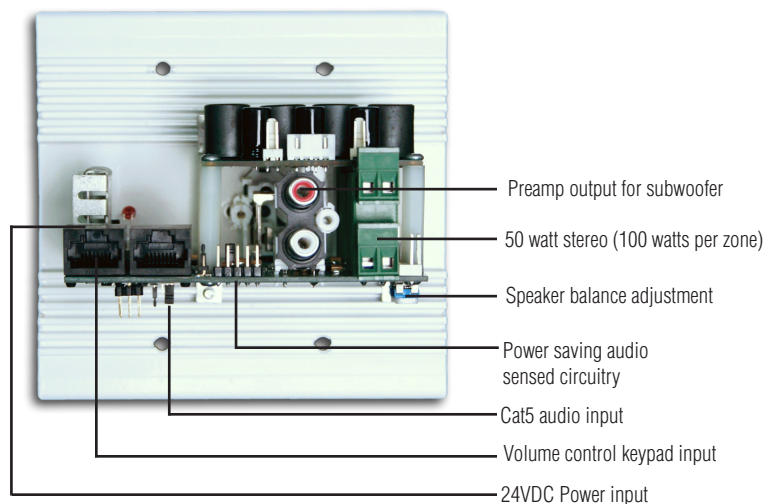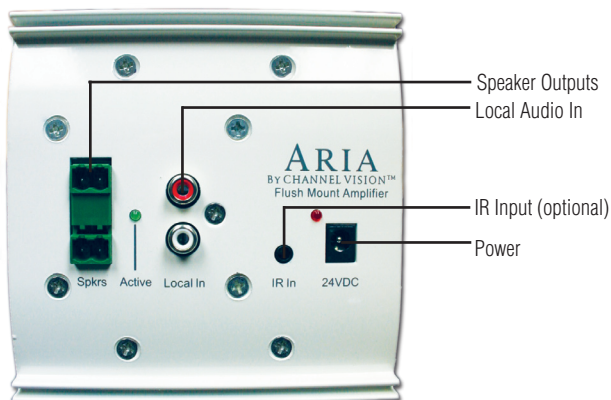

Specifications*

Amplifier:

Power Input: 24VDC

Output Power: 50 watts/ch RMS into 6 ohms @ <10% THD

Frequency Response: 20-20kHz (+/-3dB)

Signal to Noise Ratio: >85dB

Input Sensitivity: 500m VRMS

Auto on Threshold: 10m VRMS

Storage Temperature: -40 to +85° C

Operating Temperature: 0 to 55° C

*Specifications subject to change



Channel Vision Central
Structured Wiring



Channel Vision PRO
IR & Audio Equipment



ARIA™
Multi-Room Audio



Channel Vision Technology
Modulators, Cameras, Intercoms

CHANNEL VISION™

www.ChannelVision.com

800.840.0288

714.424.6500

234 Fischer Ave., Costa Mesa, CA 92626 USA

Specifications subject to change without notice.
Channel Vision Technology, Channel Vision Central and ARIA are trademarks of Channel Vision Technology.
©Channel Vision Technology 2010