

Technical Specifications

SPECIFICATIONS FDX-AV	
Systems:	Windows 2000, XP and 2003 and Linux
Video Interface	DVI-D female Single link Resolution: 1920 x 1200 @ 60 Hz DDC internal table can be reprogrammed
Audio	Signal Type Stereo Audio Bandwidth 15MHz, 0dB Impedance 100 Ohm Connector 3.5mm mini jack, Female
RS232	RS232 Data up to 57,600 DB9 Support TXD, RXD, GND
Dimensions (Inches)	
Power Supply	110/240 -5VDC-3A
Fiber	• 700 ft. @ Multimode 62,5µ • 1,400 ft @ Multimode 50µ Fibre-Plug type SC
Compatible with all operating systems Rack Mount options (19"): available	

© Copyright 2004 Smart-AVI, All Rights Reserved

Notice

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

For the complete manual, visit www.smartavi.com.

ORDER INFO

Model	Description
FDX-AV	Point to point DVI-D, Stereo Audio and RS-232 fiber esxtender. Includes: [FDX-TXAV, FDX-RXAV, 2 x (PS5V3A)]

Smart-AVI
Smart Audio Video Integration

User Manual

FDX-AV



The FDX-AV is a Powerful Fiber Optic Digital Signage and Multimedia Signal Extender that Transmits Stereo Audio, DVI-D and RS-232 Data up to 1,400 Feet

Smart-AVI

2840 N. Naomi Ave.
Burbank, California 91504
Phone: (818) 565-0011
Facsimile: (818) 565-0020

Introduction

The FDX-AV extends any DVI-D signal and audio up to 1400 feet with fiber cable.


Features

- Top Signal Quality at Maximum Extension Over Multimode Fiber (1,400 ft.)
- Superior Image Quality at all Resolutions
- Video Resolutions up to 1920 x 1200 at 60Hz (1280 x 1024 at 75Hz)
- Customizable/Programmable DDC Table
- Supports Stereo Audio
- Supports DVI-D
- Supports RS-232 Control from 300bps to 19,200bps
- Fiber Plug Type LC
- Compatible With all Operating Systems
- Compact Metal Casing

Applications

- **Sharing:** Enables easy access to one server from location.
- **Security:** Safeguards the servers by storing them in a secure and climate controlled environment.
- **Savings:** Saves equipment costs, physical space and utilities.
- **Productivity:** Increases productivity by facilitating testing and performance evaluation of software and equipment, on multiple servers.
- **Multimedia:** Can be used in multimedia presentations where the presentation information is broadcast to various KNM's.

Installation Diagram

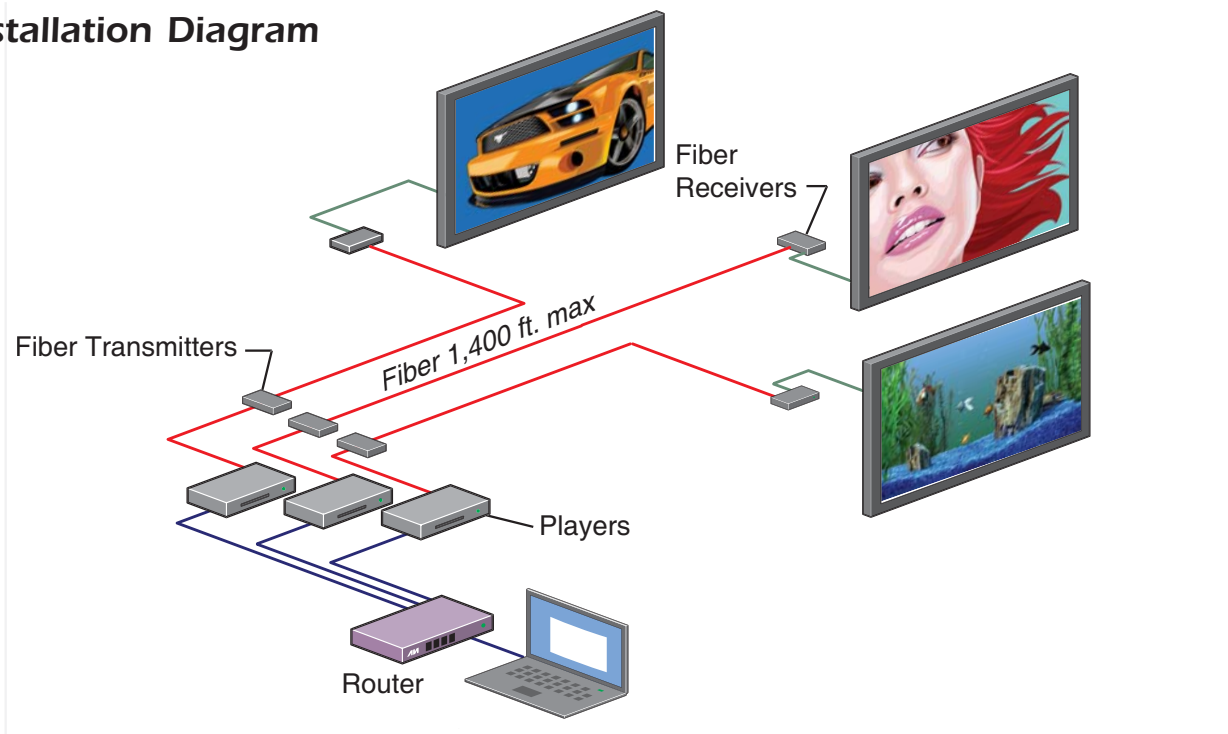

Installing and preparing the Fiber

1. Fiber used, SC type
2. 62.5μ fiber optic cable , 800 ft.
3. 1400μ fiber optic cable, 1,400 ft SC Fiber



Installation

1. Before installing any SmartAvi products, verify that the computer's DVI, and sound all work properly when connected directly.
2. Power off computer and monitor.
3. Using compatible cables, connect the DVI, sound from the PC to the FDX-TXAV.
4. Connect and run 2 SC fiber from the FDX-TXAV to the FDX-RXAV's location.
5. Plug in the DVI monitor and sound to the FDX-RXAV.
6. Connect the power supplies to the transmitter and receiver.
7. Turn on the computer and monitor.

