ANY SPOT®
WIRELESS MICROPHONE SYSTEM

EDX

The EDX Series is a dual channel wireless microphone system. The EDX features 2 internal antennas (1 for each receiver), 16 selectable UHF frequencies on each receiver, and IR Sync transmitters to receiver. The EDX has 2 discreet male XLR outputs and 1 combined 1/4" output on the back of the unit. The output is controlled by a volume control for each receiver, located on the front of the unit.

IR SYNC

The EDXR can be used and will sync with either the HH38 handheld or the MBP38 body pack transmitters. Systems with the MBP38 body pack are available with either a lavalier, or headset. Both transmitters feature an on/off switch and are powered by two “AA” batteries. The MBP38 body pack transmitter also features a Mic/0/-10 selector switch for various input level sources.

EDX System
- 200' Range
- 16 Selectable Frequencies
- Internal Antennas

DUAL CHANNEL

EDXR Receiver
- Dual Channel Receiver
- AF & RF Level Indicators
- IR Sync Transmitter to Receiver
- 1 Mixed 1/4" Output, Two Balanced Male XLR Outputs
- 2 Internal Antennas (Non-Diversity)
- Rugged Plastic Casing

EDX OPTIONS -OTHER OPTIONS INCLUDE THE HH38 HANDHELD OR MBP38 BODY PACK

DUAL HANDHELD EDXR/ HH38

HANDHELD/ HEADSET EDXR/ HHBP5

HANDHELD/ LAVALIER EDXR/ HHBPV

DUAL LAVALIER EDXR/ 38VV

HEADSET/ LAVALIER EDXR/ 38SV

DUAL HEADSET EDXR/ 38SS

UPGRADE YOUR SYSTEM WITH A GREAT HEADSET MIC

EDXR/38

ESM8 ESM3 HSM8 HSM3

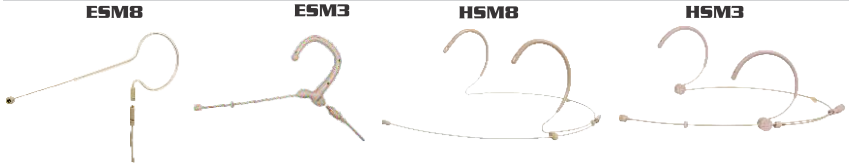

MAKERS OF THE ORIGINAL HOT SPOT PERSONAL MONITOR

GALAXY AUDIO®

ANY SPOT®
WIRELESS MICROPHONE SYSTEM

EDX

Specifications:

EDX System
Available Channels: 16
Transmitter Output Level: 10 mW
Band: UHF
Operating Range: Under Typical Conditions 200' (61 m), actual range depends on RF signal absorption, reflection, and interference.
Audio Frequency Response: (+/-3 dB) 60 Hz - 16 kHz
Total Harmonic Distortion: (+/-30 kHz deviation 1 kHz tone): <1%
Dynamic Range: >90 dB A-weighted
Operating Temperature Range: 14ºF to 122ºF (-10ºC to 50ºC), battery characteristics may limit this range.
Included Accessories: Power Supply, 1/4" to 1/4" Audio Cable x1, Quick Start Guide

EDXR Receiver

BACK VIEW

Receiver (EDXR)
Audio Output Level: XLR Connector (into 600 Ohms load) -12dBV
1/4" Connector (into 3k Ohms load) -18dBV
Output Impedance: XLR Connector 200 Ohms
1/4" Connector 1k Ohms
XLR Output: Impedance balanced
Pin 1: Ground (cable shield)
Pin 2: Audio +
Pin 3: No Audio -
Sensitivity: -92dBm
Image Rejection: >92dB
Dimensions: 1.7" x 8.3" x 5" (42 x 210 x 127 mm)(HxWxD)
Weight: 13.6 oz (390 g)
Power Requirements: 12-18 V dc at 300mA, supplied by external power supply

TOP VIEW
MBP38

HH38

Dynamic Cardioid Handheld Transmitter (HH38)
Max Audio Input Level: 0dBV
Gain Adjust: Trim pot
RF Output: 10 mW
Frequency Response: 70Hz - 10kHz
Dimensions: 10.8" x 1.9" (275 x 47 mm) (LxDia.)
Weight: 6.9 oz (195 g) (without batteries)
Power Requirements: 2 “AA” Batteries, alkaline or rechargeable
Battery Life: About 8 hours (alkaline)

Body Pack Transmitter (MBP38)
Max Audio Input Level: 0dBV to +20dBV
Gain Adjust: Mic / 0dB / -10dB
RF Output: 10 mW
Input Impedance: 5k Ohms
Dimensions: 3.3" x 2.6" x 1" (85 x 65 x 23 mm) (HxWxD)
Weight: 2.8 oz (80 g) (without batteries)
Power Requirements: 2 “AA” Batteries, alkaline or rechargeable
Battery Life: About 8 hours (alkaline)

FREQUENCY CODES
CODE D 584-607 MHz
CODE L 655-679 MHz
CODE N 518-535 MHz

3 YEAR WARRANTY

Specifications subject to change without notice.

GALAXY AUDIO

MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 www.galaxyaudio.com
Distributed in Canada by **Audio Distributors International** (**ADI**) 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada
450.449.8177 FAX 450.449.8180
Distributed outside the United States by **TradeLink America, LLC.** 230 Kings Mall Ct., Suite 182 Kingston, NY 12401
MikeH@TradeLinkAmerica.com TEL 1.845.246.6200 FAX 1.845.746.9070

V20171010