

# High Density DVI USB KVM Switch: 4-, 8-, 16-, 24- and 32-Port UNIMUX™

## Control up to 32 single link DVI or HDMI USB computers with one USB keyboard, USB mouse & DVI monitor.

- The High Density Switch saves rack space
  - 4-, 8- and 16-port switches are 1RU in height.
  - 24- and 32-port switches are 2RU in height.
  - Rackmount kit included.
- Incorporates NTI's patented true autoboot USB switching; all attached USB PCs, SUNs and MACs can be booted simultaneously.
- Supports video resolutions up to 1920x1200.
- Supports digital DVI for crisp and clear video quality on flat panel display.
- Control the switch through the front panel interface, keyboard commands or RS232.
- Compliant with USB 2.0 (low/full speed) standards.
- High quality, rugged steel construction with durable powder coat finish.
- USB SUN start-up keys are supported.
- Supports MAC soft (keyboard) power-on.
- Cabling runs are simplified with NTI's high density KVM switch cables.
  - Use USB-HHEXT-xx-MM cables to connect HDMI computers to the switch.
  - Use USB-DHEXT-xx-MM cables to connect DVI computers to the switch.



UNIMUX-DVI-16HD (Front & Back)

The UNIMUX™ High Density DVI USB KVM switch allows you to control up to 32 single link DVI or HDMI USB computers with one DVI-D monitor, USB keyboard and USB mouse.

## Specifications

### Hosts

- Female HDMI-A connectors.
- Supports USB-enabled computers (PC, SUN, and MAC) with DVI video.
- Multiplatform support: Windows 2000/XP/Vista/7/8/10, Windows Server 2000/2003/2008/2012, Solaris, Linux, FreeBSD, and MAC OS 9/10.

### Monitor

- Supports crisp and clear video resolution up to 1920x1200.
- One female DVI-I connector.
- Single link DVI-D signal.
- DDC2B compatible.

### Devices

- Two female USB Type A connectors.
- Provides support for full-speed (12 Mbps) or low-speed (1.5 Mbps) USB keyboard and mouse.
- Compatible with most USB keyboards and mice, including USB IntelliMouse®.
- Keyboard and mouse are hot-pluggable.
- Supports SUN and MAC extra keys.

### Power

- 110 or 220 VAC at 50 or 60 Hz via IEC connector.
- Power consumption: 10W

### Dimensions

- 4-, 8-, 16-port switches WxDxH:
  - 15.2x6x1.75 in (386x152x45 mm) (without supplied rackmount kit)
  - 19x6x1.75 in (483x152x45 mm) (with supplied rackmount kit)
- 24- and 32-port switches WxDxH:
  - 15.3x6x3.5 in (389x152x89 mm) (without supplied rackmount kit)
  - 19x6x3.5 in (483x152x89 mm) (with supplied rackmount kit)

### MTBF

- UNIMUX-DVI-4HD: 262,851 hrs
- UNIMUX-DVI-8HD: 217,508 hrs
- UNIMUX-DVI-16HD: 160,996 hrs

### Cables

- Interface cables between your computers and the switch are required for proper operation. (Cables not included)
  - Use USB-DHEXT-xx-MM to connect DVI computers to the switch.
  - Use USB-HHEXT-xx-MM to connect HDMI computers to the switch.

### Environmental

- Operating temperature: 32°F to 100°F (0°C to 38°C).
- Storage temperature: -22°F to 140°F (-30°C to 60°C).
- Operating and Storage Relative Humidity: 17 to 90% non-condensing RH.

### Regulatory Approval

- CE, RoHS
- TAA compliant


### Compatible NTI Products

- Combine NTI's extenders, switches, and cables for complex applications.
  - DVI-D to HDMI Single Link Interface Cable (DVI-HD-xx-MM).
  - HDMI USB KVM Extender over HDBase-T (ST-C6USBH-HDBT).

# High Density DVI USB KVM Switch: 4-, 8-, 16-, 24- and 32-Port UNIMUX™

Control up to 32 single link DVI or HDMI USB computers with one USB keyboard, USB mouse & DVI monitor.

## Configuration and Cable Illustration

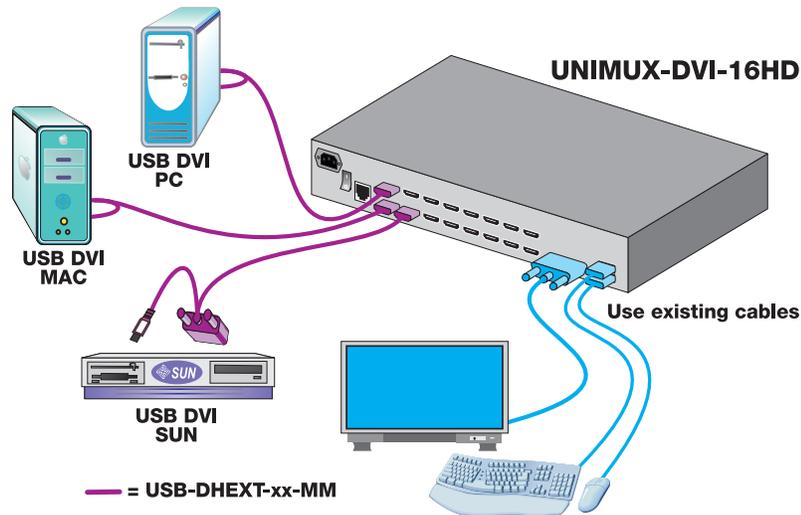

## Control Methods

### Front Panel Interface

- LEDs indicate currently selected port and mode of operation.
- Hold in any button for more than five seconds to go into **Scan, Broadcast** or **Command Mode**.
  - In **Normal Operating Mode**, the user can directly operate the selected computer with transparent presence of the NTI switch.
  - **Scan Mode** automatically and sequentially displays the video from each powered on computer for 2-255 seconds.
  - **Broadcast Mode** allows the user's keystrokes to be sent to both powered on computers. (Broadcast Mode is not available for MACs.)
  - **Command Mode** allows the user to give instructions to the switch through his/her keyboard. Keystrokes are not passed to the computer.

### Keyboard

- **Scan, Broadcast** or **Command Modes** are available from the keyboard using hot keys.
- Use the keyboard to command the switch box to select ports or configure the **Scan** delay.
- Type <Ctrl>+<'> (or <Compose>+<'>) to go into Command Mode.
- Press <Esc> to leave **Command Mode** and return to **Normal** or **Scan Mode**.

### RS232 Control

- Female RJ45 connector.
- Baud rate 2400, 9600, 19200, or 38400.
- Use DIP switches to set the baud rate and address up to 16 units, all of which can be daisy chained and controlled by one serial port.
- 5-foot (1.5-meter) CAT5e patch cable, RJ45F-DB9F and RJ45F-DB25F adapters included.
- **Commands**
  - RS - causes switch to reset so that IN1 connects to OUT1, IN2 connects to OUT2.
  - CS - causes one INx/OUTx connection to occur.
  - CA - causes all inputs to connect to specified output.
  - RO - reads what input is connected to specified output.
  - RU - reads size of matrix, reports number of inputs and number of outputs on specified switch.

### High Density USB DVI KVM Switches

| NTI Part #      | # of CPUs (x) | Desktop Size WxDxH without supplied rackmount kit | Rack Size WxDxH with supplied rackmount kit |
|-----------------|---------------|---|---|
| UNIMUX-DVI-4HD  | 4             | 15.2x6x1.75 in (386x152x45 mm)                    | 19x6x1.75 in (483x152x45 mm)                |
| UNIMUX-DVI-8HD  | 8             | 15.2x6x1.75 in (386x152x45 mm)                    | 19x6x1.75 in (483x152x45 mm)                |
| UNIMUX-DVI-16HD | 16            | 15.2x6x1.75 in (386x152x45 mm)                    | 19x6x1.75 in (483x152x45 mm)                |
| UNIMUX-DVI-24HD | 24            | 15.3x6x3.5 in (389x152x89 mm)                     | 19x6x3.5 in (483x152x89 mm)                 |
| UNIMUX-DVI-32HD | 32            | 15.3x6x3.5 in (389x152x89 mm)                     | 19x6x3.5 in (483x152x89 mm)                 |