


A **BELDEN** BRAND

## Mini HD/SDI Transmitter and Receiver

*Ultra-miniature for fixed and temporary digital video links*

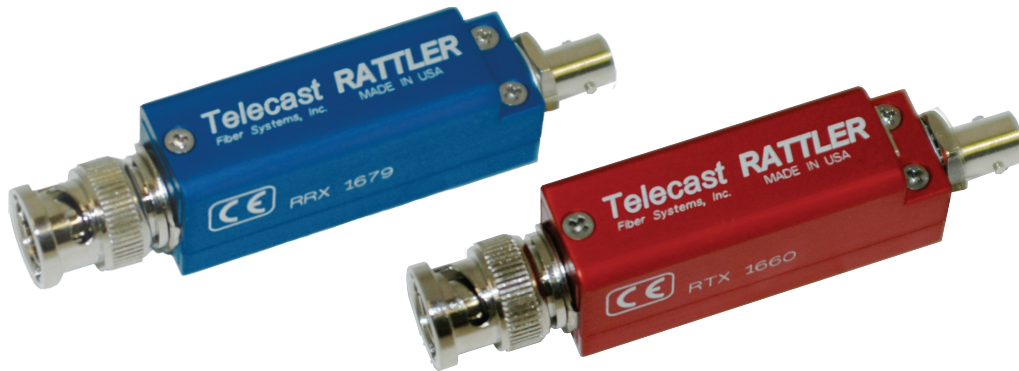

### The HD/SDI problem solver in your pocket, with on-board optical power metering

Telecast's Rattlers are miniature fiber optic serial digital video transmission modules that offer the industry's broadest range of digital rates while maintaining the signal quality that broadcasters demand. No matter what your format, the Rattlers allow you to transmit:

- 19.4 Mbps SMPTE 310M
- 143 to 540 Mbps SMPTE 259M/344M
- 1.5 Gbps SMPTE 292M HDTV
- DVB/ASI 270Mbps
- AES and MADI Audio

These modules are inter-operable with Telecast's Python™ series, Viper™I and Viper™II series frames and modules, so you can expand the systems that you already have and create a wide variety of network topologies.

The Rattler TX accepts a 75 ohm coaxial input and converts it into an optical stream via a standard ST connector. The RX unit reconverts the uncompressed signal back to a BNC output.

At just three inches in length, these tiny modules can be deployed almost anywhere!

The transmitter modules include equalization for long lengths of coaxial cable, so you can use them at nearly any point in your HD/SDI chain.

Both the red transmitter and blue receiver modules include LED indicators to display Power On, HD/SDI Signal Presence and, on the RX, Received Optical Power level. This provides critical system diagnostic information without the need for additional test equipment, such as an optical power meter.

*Verify your optical power with a glance at the convenient power meter*



Rattlers use their own wall-wart power supplies or accept any DC voltage from 5 to 16 volts via a mini-USB jack. And up to four Rattlers can be powered from a 4-port powered USB hub.

### Features

- Portable, lightweight units
- Cool, efficient, reliable
- Quick, easy installation
- LED indicators show you:
  - Power on
  - HD/SDI data presence
  - RX Optical power levels
- 19.4 Mbps to 1.5 Gbps
- Compatible with SMPTE 310M, 292M, 259M & 297M
- Supports embedded audio
- Up to 30 km distance
- Low system jitter
- Power from 5-16 VDC
- USB power capable
- High durability design

### Applications

- Sports teleproduction
- Remote camera links
- Cross-town fiber links
- Cross-campus production
- Pre-fibered venues
- Courtesy feeds

### Compliance

|              |                |
|--------------|----------------|
| Laser Safety | Class 1 Laser  |
|              | 21 CFR 1040.10 |
| EMI/RFI      | Complies with  |
|              | IEC/EN 60825-1 |

### Video

|                                    |                       |
|------------------------------------|-----------------------|
| Transmission method                | Digital               |
| Input level                        | 800 mV (peak to peak) |
| Input Impedance                    | 75 ohms               |
| Coax Equalization @ 1.485 Gbps     | 100m                  |
| Output Impedance                   | 75 ohms               |
| Bit-Error Rate (@ -22 dBm)         | 10 <sup>-11</sup>     |
| Jitter (pathological data pattern) | < 0.2 UI              |
| Rise/Fall Times                    | < 270 ps              |

### Transmission

|                        |                          |
|------------------------|--------------------------|
| Operating wavelength   | 1310nm                   |
| Video connector in/out | BNC                      |
| Optical connector      | ST                       |
| Optical Source         | Laser Diode              |
| Optical detector       | PIN-TIA Diode            |
| Transmitter output     | -7 dBm                   |
| Receiver sensitivity   | -22 dBm                  |
| Link Margin/Distance   | 15 dB/20 km              |
| Fiber type             | single mode or multimode |

### Mechanical/Environmental

|                                    |                                    |
|------------------------------------|------------------------------------|
| Dimensions (LxWxH)                 | 3.2" x 0.65" x 0.75"               |
| Weight, each end                   | 1.8 oz                             |
| Input Voltage                      | 5-16 VDC                           |
| Power connector                    | mini USB, female                   |
| Power Consumption, each end (typ.) | 600mW                              |
| Indicators                         | Power, signal, link, optical power |
| Temperature Range, operating       | -25° C to +55° C                   |
| Humidity Range                     | 0 to 95%RH, non-condensing         |