




ASSEMBLY INSTRUCTION

NC3FXX-EMC & NC3MXX-EMC | XLR Cable Connector

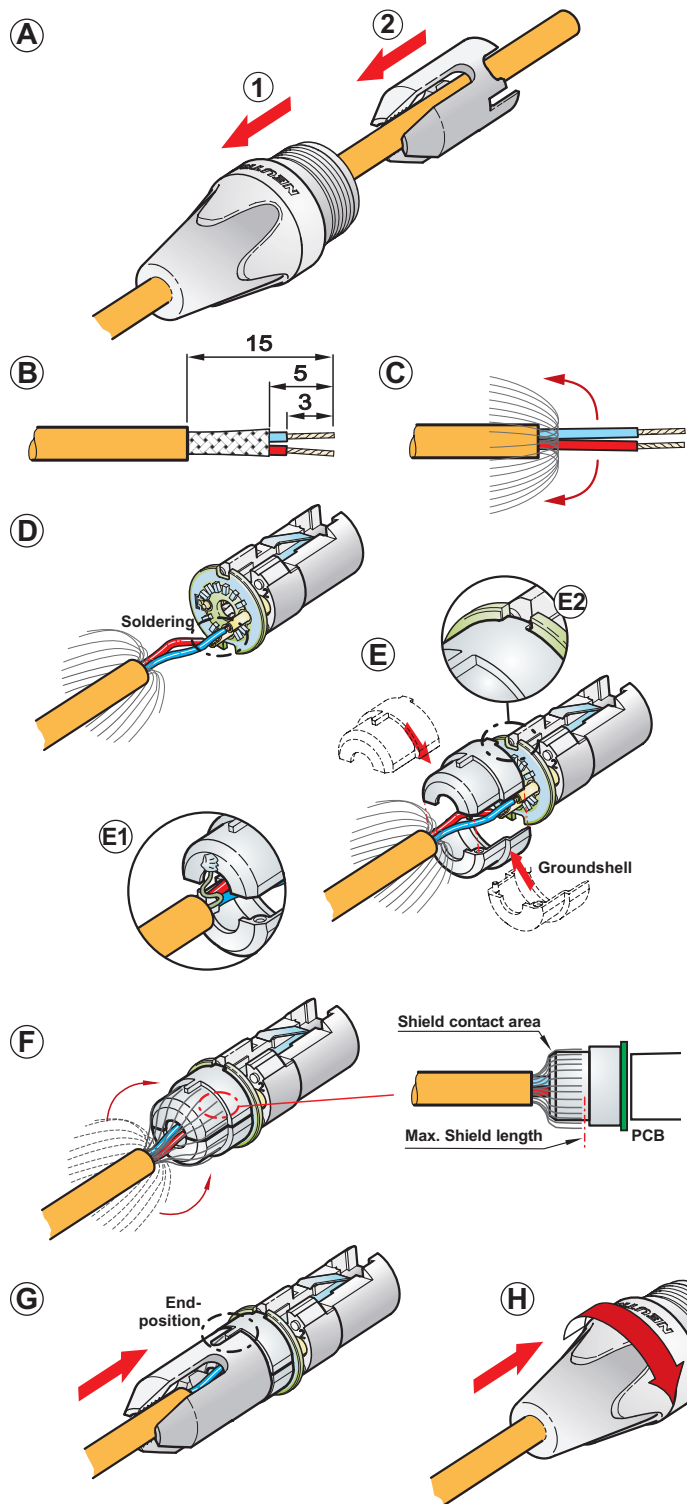

- A** 1. Slide the boot onto the cable.
2. Put chuck onto the cable.

B Prepare cable as shown.

C Fold back the cable-shield as shown.

D Insert wires into the terminals and solder them.

E Position the ground-shells over the conductors as shown.

In Case of cable with foil shield only:
Solder drain wire to the ground shell (E1).
Keep drain wire as short as practical, proceed with step (G).

Pay attention to inserting coding-rib of ground shell (E2), into dedicated recess of pcb.

F Lay cable-shield over ground shell. Distribute wires circumferentially.

G Slide chuck over cable-shield and ground shells towards end-position aligning the slots of the chuck to the ribs of the ground shells.

H Slide insert into the housing.

Finish the installation by turning the bushing onto the connector.

NEUTRIK AG
NEUTRIK Zürich AG
NEUTRIK USA Inc.
NEUTRIK (UK) Ltd.

LI
CH
USA
UK

T: +423 / 237 24 24 F: +423 / 232 53 93
T: +41 44 / 736 5010 F: +41 44 / 736 5011
T: +1 732 / 901 9488 F: +1 732 / 901 9608
T: +44 1983 / 811 441 F: +44 1983 / 811 439

NEUTRIK Vertriebs GmbH
NEUTRIK France
NEUTRIK Tokyo Ltd.
NEUTRIK Hong Kong Ltd.

DE/NL/AT
FR
JP
HK

T: +49 8131 / 280 890 F: +49 8131 / 280 830
T: +33 1 / 4131 6750 F: +33 1 / 4131 0511
T: +81 3 / 3663 4733 F: +81 3 / 3663 4796
T: +852 / 2687 6055 F: +852 / 2687 6052