




ASSEMBLY INSTRUCTION


NL4FC | speakON® - Lockable Loudspeaker Connector

Attention: speakON® is not to be used as an AC mains or power supply connector!

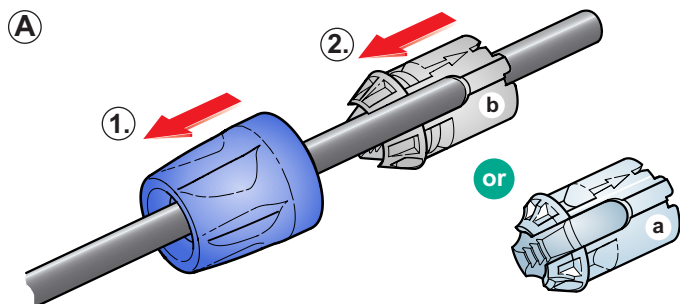


- A** Place the bushing (1) and the chuck (2) over the cable.

White chuck (a): 6.0 - 11.0 mm [0.236 - 0.433"]
Black chuck (b): 9.5 - 15.0 mm [0.374 - 0.59"]

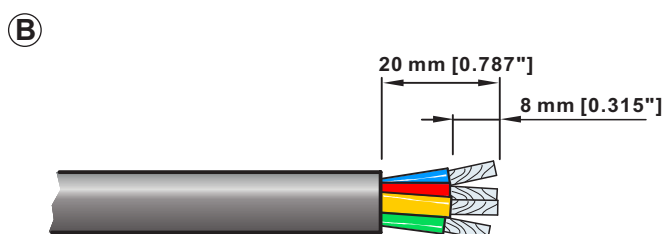


- B** Prepare the cable as shown.

Cable O.D.: 6.0 - 15.0 mm [0.236 - 0.59"]
Wire size: 4 mm² (AWG 12)

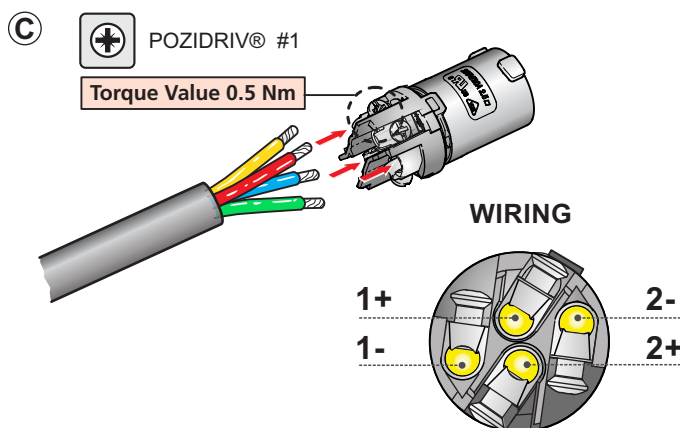

- C** Insert the wires into the terminals and fasten the clamping device with a screw driver (POZIDRIV® #1).

Max. torque 0.5 Nm (0.37 lb-ft).

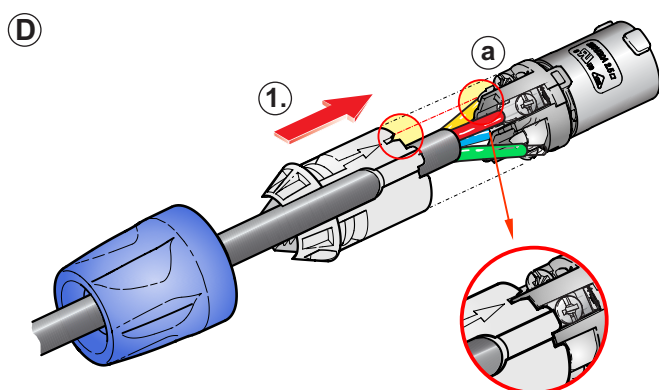


- D** Slide the chuck (1) onto the insert.

Important:
(a) Align the chuck by positioning the nose into the recess.





⑤

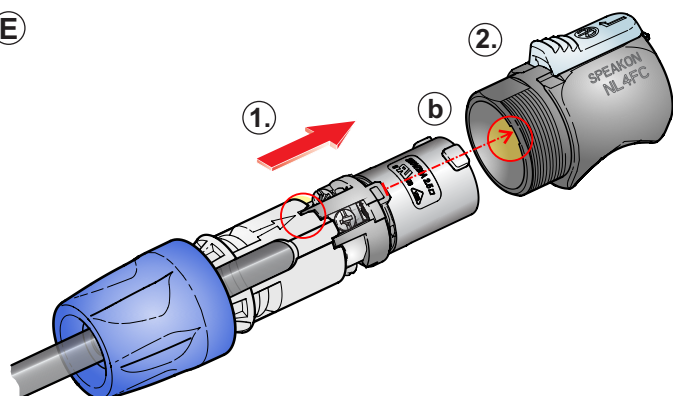

⑤

Slide the insert and the chuck (1) into the housing (2).

Important:


(b) Pay attention to the guiding keyway!

⑥



Wrench size
7/8" (SW22)

Torque Value 2.5 Nm

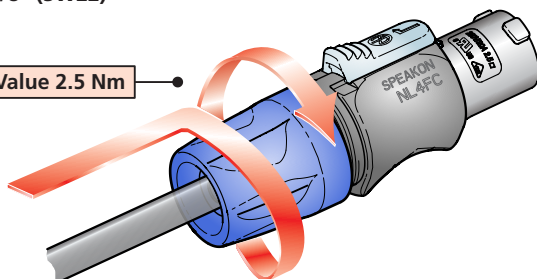


⑥

Fasten the bushing with a fork wrench 7/8" (SW 22).

OPTION:

Use the handtool HTFAC to tighten the bushing.

FINISHED speakON

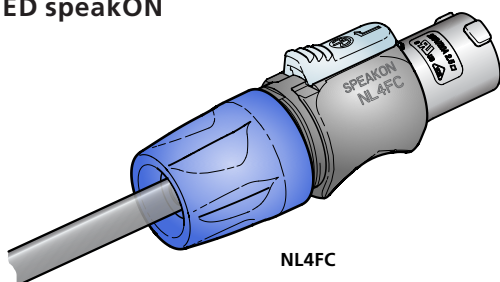

NL4FC



Find more details of speakON on www.neutrik.com.

NEUTRIK AG LI T: +423 / 237 24 24 F: +423 / 232 53 93
NEUTRIK USA Inc. USA T: +1 704 / 972 3050 F: +1 704 / 438 9202
NEUTRIK (UK) Ltd. UK T: +44 1983 / 811 441 F: +44 1983 / 811 439
NEUTRIK Vertriebs GmbH DE/NL/AT/DK T: +49 8131 / 280 890 F: +49 8131 / 280 830

NEUTRIK France FR T: +33 1 / 4131 6750 F: +33 1 / 4131 0511
NEUTRIK Tokyo Ltd. JP T: +81 3 / 3663 4733 F: +81 3 / 3663 4796
NEUTRIK Hong Kong Ltd. HK T: +852 / 2687 6055 F: +852 / 2687 6052
NEUTRIK India Pvt. Ltd. IND T: +91 / 982 05 43 424 F: +91 / 22 26163 540

Draft. Nr.: BDA 450 | Update: 25.10.2016 | Data subject to change without prior notice. ©2016 NEUTRIK®. ALL RIGHTS RESERVED. NEUTRIK® is a registered trademark.

www.neutrik.com

NEUTRIK