

SDI Distribution, Conversion, De-Embedding

DA-SDI-DE

SDI De-Embedder with 16 channels of embedded audio

DB25-AA-BL

Balanced Analog Audio Breakout Cable

DB25-AA-UNBL

Unbalanced Analog Audio Breakout Cable

DB25-AES-BL

Balanced AES Audio Breakout Cable


DB25-AES-UNBL

Unbalanced AES Audio Breakout Cable

AES-75-110

75 to 100 Ohm Transformer

- De-Embeds 3G/HD/SD-SDI with 16 channels of audio
- Outputs 8 AES pairs or 16 mono analog audio
- Onboard LED meters for display audio presents
- Onboard LED for display of group association

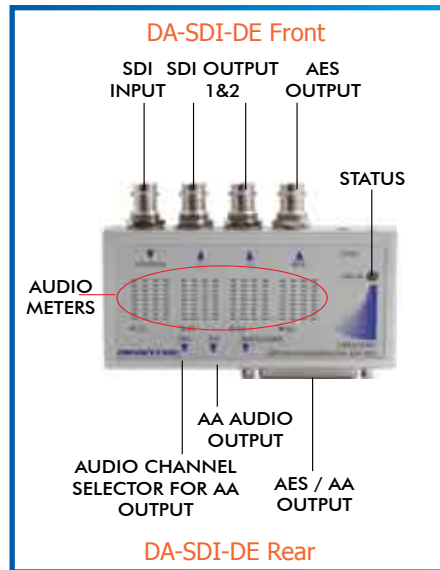

MODEL	DA-SDI-DE
DESCRIPTION	SDI Deembedder with 2 Looping Inputs
INPUT	1 x SDI Data Rate: 125 Mbps to 2.97 Gbps
OUTPUT	2 x SDI up to 2.97 Gbps
AUDIO	De-embeds 16 channels of AA, 8 pairs of AES Balanced or Unbalanced
POWER	5V DC
WEIGHT	1 lb (0.45 kg)
DIMENSIONS	62 mm W x 113 mm D x 29 mm H
MOUNT	Magnetic

HD-BASE T

HDMI

DVI

VGA

KVM

TOUCH

OTHERS

SDI