


# SDI DISTRIBUTION, CONVERSION, DE-EMBEDDING

- De-Embeds 3G/HD/SD-SDI with 16 channels of audio
  - Outputs 8 AES pairs or 16 mono analog audio
  - Onboard LED meters for display audio presence
  - Onboard LED for display of group association

## DA-SDI-DE


SDI De-Embedder with 16 channels of embedded audio

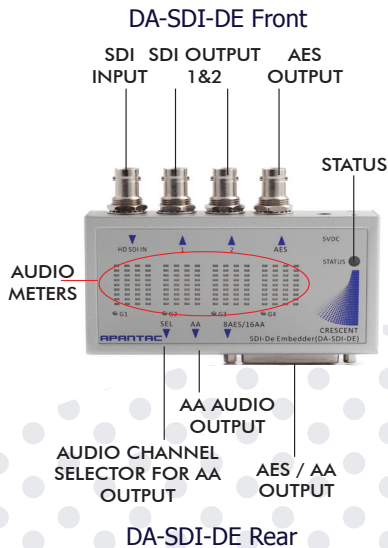

## DB25-AA-BL

Balanced Analog Audio Breakout Cable

DB25-AA-BL

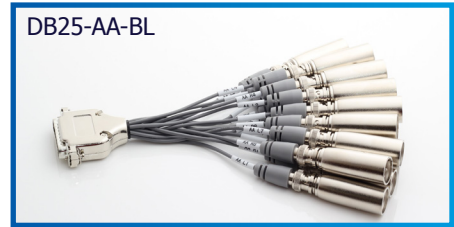

## DB25-AA-UNBL

Unbalanced Analog Audio Breakout Cable

DB25-AA-UNBL



## DB25-AES-BL

Balanced AES Audio Breakout Cable


DB25-AES-BL



## DB25-AES-UNBL

Unbalanced AES Audio Breakout Cable

DB25-AES-UNBL

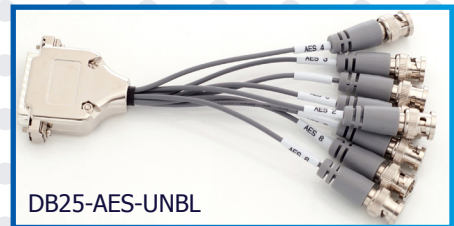

MODEL	DA-SDI-DE
DESCRIPTION	SDI De-embedder with 2 Looping Inputs
INPUT	1 x SDI Data Rate: 125 Mbps to 2.97 Gbps
OUTPUT	2 x SDI up to 2.97 Gbps
AUDIO	De-embeds 16 channels of AA, 8 pairs of AES Balanced or Unbalanced
POWER	5V DC
WEIGHT	1 lb (0.45 kg)
DIMENSIONS	62 mm W x 113 mm D x 29 mm H
MOUNT	Magnetic

## AES-75-110

75 to 110 Ohm  
Transformer

