


PATTERN GENERATOR

- 35 different patterns • 48 possible output resolutions
- 1 KHz tone (@ 48 KHz) • Portable, operates up to 8 hours on rechargeable batteries
- Includes 12V DC power adapter and an HDMI cable in a carrying case

PTG-HDMI

HDMI Test Pattern Generator


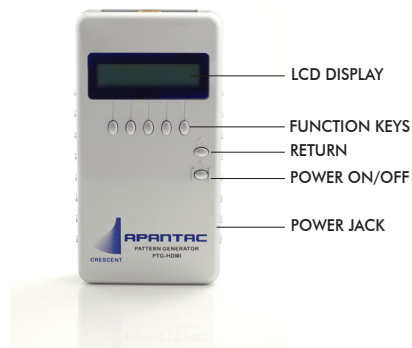


MODEL	PTG-HDMI
DESCRIPTION	HDMI Test Pattern Generator
OUTPUT CONNECTOR	HDMI Type A HDMI 1.3
LCD	2 lines, 16 characters
MAXIMUM RESOLUTION	1600x1200 / 1920x1200 / 1920x1080 @60Hz
HIGHEST TMDS FREQUENCY	225 MHz
MAX CABLE DISTANCE	5 meters / 3.3 feet
POWER	DC 12V 1.25A
HOUSING	Plastic
WEIGHT	398 grams / less than 1 lb
DIMENSIONS	180 mm W x 95 mm D x 35 mm H

- Supports multiple formats (HDMI, VGA, YPbPr, CVBS, and S-Video)
 - HDMI, HDCP, and DVI compliant
- Supports a total of 51 timings (up to UXGA1080P)
 - Provides a total of 31 patterns
- Accepts customize bitmaps (.bmp) patterns via SD/SDHC card slot
- Supports analog and digital audio (SPDIF) out with 48KHz sample rate, 1KHz tone
 - 12V DC power adapter
 - 1 RU

PTG-UNI

Universal Test Pattern Generator

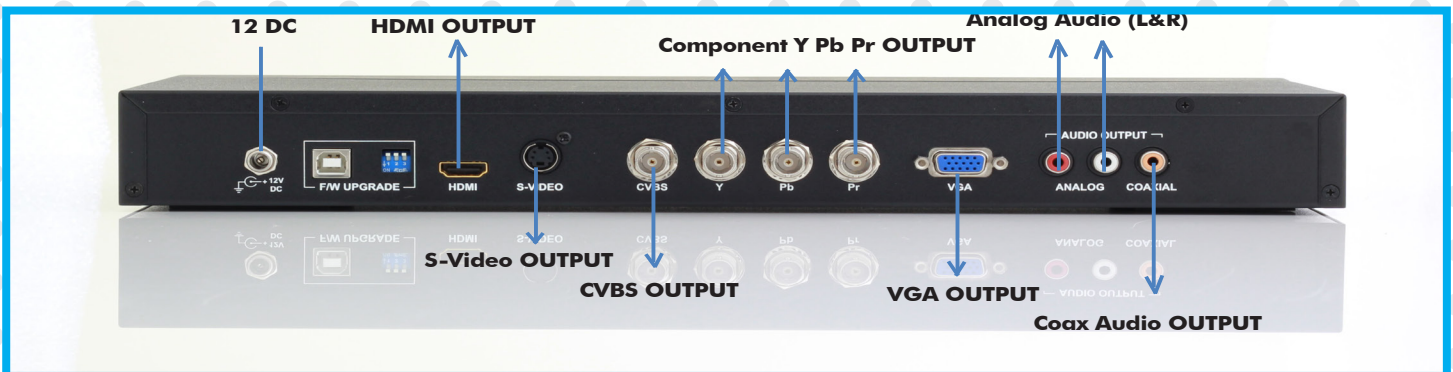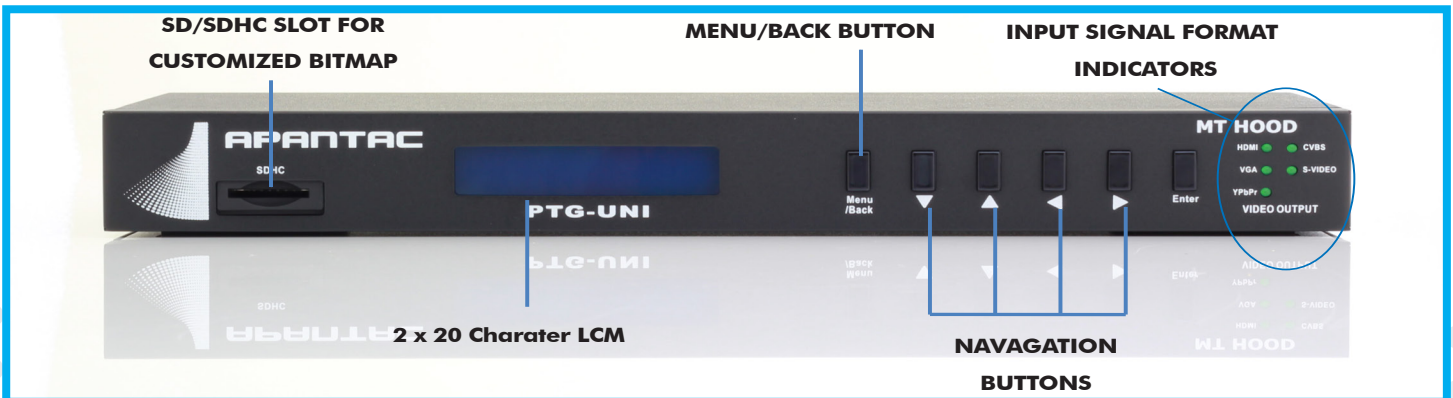

MODEL	PTG-UNI				
DESCRIPTION	Universal Test Pattern Generator				
OUTPUTS	HDMI	VGA	YPbPr	CVBS	S-Video
CONNECTORS	1 x HDMI Type A	1 x DB-15 Female	3 x BNC	1 x BNC	1 miniDIN 4 Female
BUTTONS	6				
MAX RESOLUTION	UXGA/1080P				
HIGHEST FREQUENCY	225 MHZ				
DIMENSIONS	384 mm D x 173 mm W x 45 mm H				
WEIGHT	1885g				
Power Adapter	Locking 12 V DC				