




ASSEMBLY INSTRUCTION

NP3TT-P | 0.173" (4.4 mm) Bantam-Type Miniature Plug


figure 1

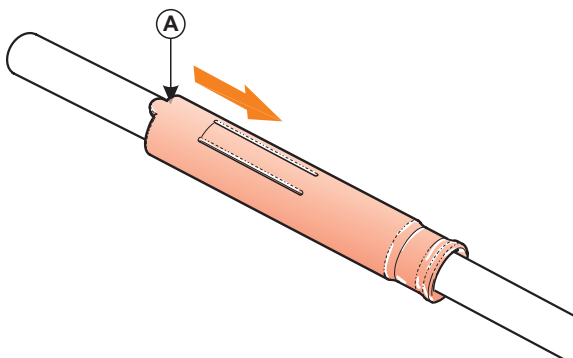

First slide the plug's plastic cover onto the cable as shown in figure 1.

Pay close attention that the cover's locking tooth labelled A faces the end of the cable, where the plug will be connected.

figure 2

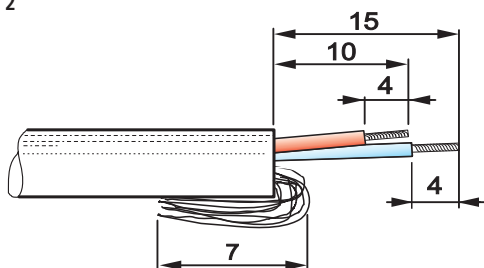


Prepare the cable by stripping away 15 mm of the outer cable jacket.

Reduce the shielding strands to a length of 7 mm and bend them over the jacket.

Shorten the wire, which will connect to the tip, to a length of 10 mm.


Strip away 4 mm of the jacketing of each wire as indicated in figure 2.

figure 3

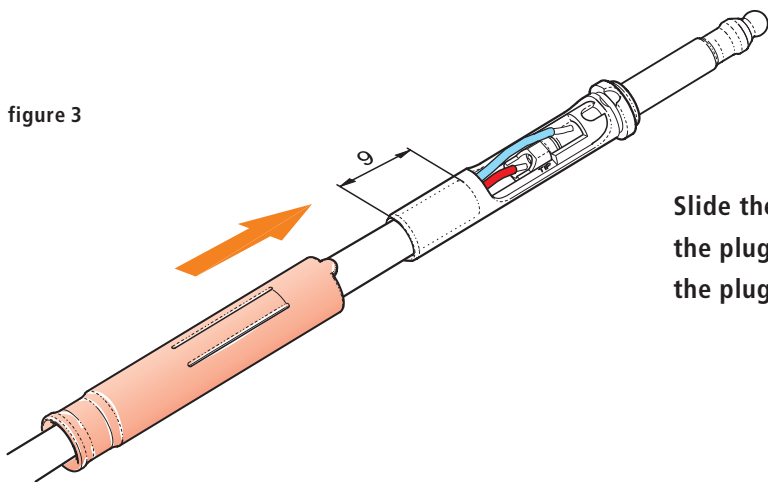


Slide the prepared end of the cable into the open end of the plug, so that 9 mm of unstripped cable rests inside the plug behind the prepared end.

figure 4

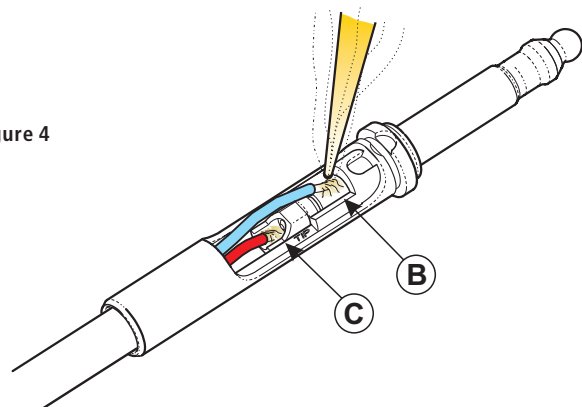


Heat the ring terminal labelled B with a soldering bit, then position the longer wire on the heated terminal and allow solder to melt affixing the wire to the terminal. Repeat the process with the tip terminal labelled C in figure 4 with the shorter wire.

figure 5

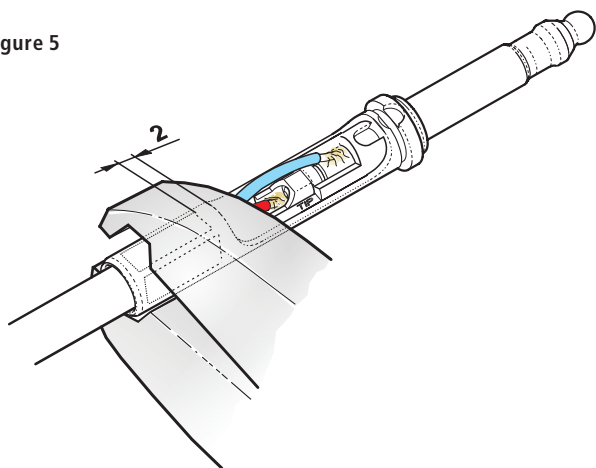

Next crimp the end of the plug containing the cable with a standard 5.41 mm hexagonal crimping Tool (RG 58). Crimp only in the area designated in figure 5!


figure 6

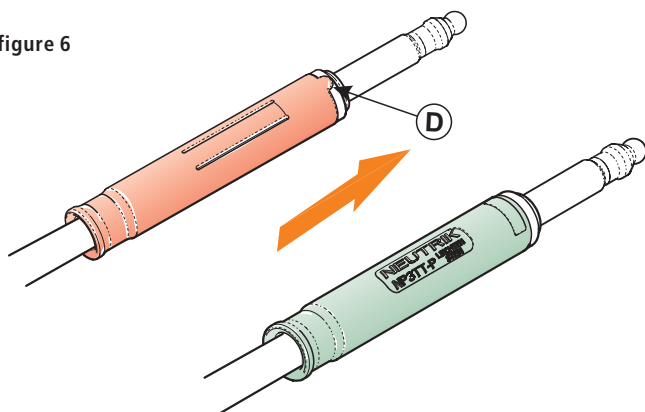

Finish the installation sliding the cover over the plug, so that the cover's locking tooth rests in the plug's notch labelled D displayed in figure 6.


Disassembly

figure 1

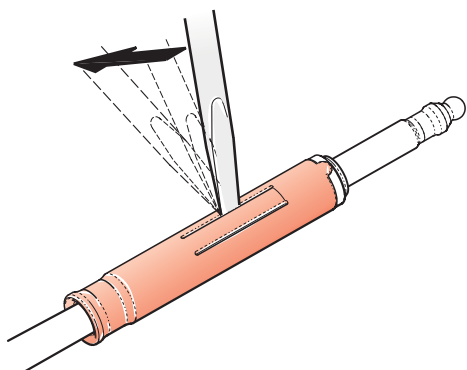

Position a screw driver into one of the two tiny slots as shown in figure 1 and bend out the plastic snap.

figure 2

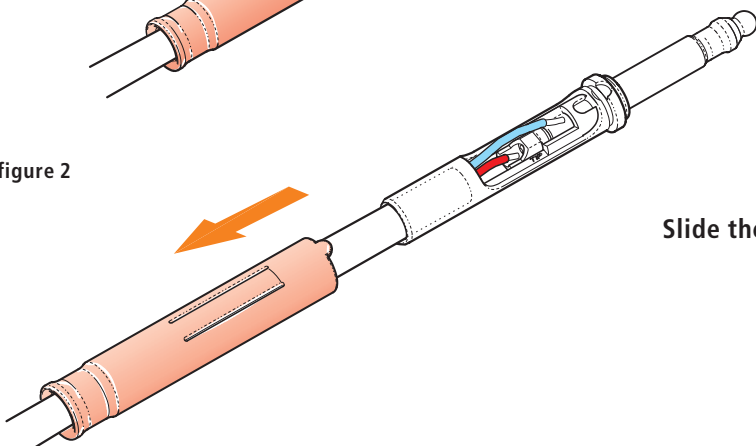

Slide the plastic cover from the connector.

NEUTRIK AG
NEUTRIK Zürich AG
NEUTRIK USA Inc.
NEUTRIK (UK) Ltd.

LI
CH
USA
UK

T: +423 / 237 24 24 F: +423 / 232 53 93
T: +41 44 / 736 5010 F: +41 44 / 736 5011
T: +1 732 / 901 9488 F: +1 732 / 901 9608
T: +44 1983 / 811 441 F: +44 1983 / 811 439

NEUTRIK Vertriebs GmbH DE/NL/AT
NEUTRIK France FR
NEUTRIK Tokyo Ltd. JP
NEUTRIK Hong Kong Ltd. HK

T: +49 8131 / 280 890 F: +49 8131 / 280 830
T: +33 1 / 4131 6750 F: +33 1 / 4131 0511
T: +81 3 / 3663 4733 F: +81 3 / 3663 4796
T: +852 / 2687 6055 F: +852 / 2687 6052