




offers up to 219 channels

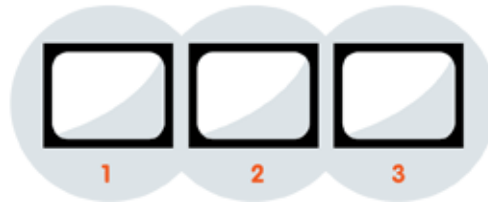

900MHz Wireless

The Broadcastvision Entertainment 900MHz transmits crystal clear audio from a TV or any source with an audio output jack to a Broadcastvision receiver. With a range of more than 35,000sq/ft, the 900MHz transmitter from Broadcastvision offers 219 channels including schemes from all of the major manufacturers providing maximum flexibility for existing and future applications. Users simply plug their headphones into Broadcastvision stationary receivers that are attached directly to, or integrated into, the cardio equipment. Choose between our feature-loaded 10-key receiver or our simplified Retro receiver. Both receivers allow the user to access 900MHz/800MHz and FM frequencies, and are compatible with Cardio Theater®, MYE® and Fantaay® 900MHz transmitters.

AXS-900TXD



AXSUS9FMR
(10 Key)



AXS9FMRT
(Retro)



Transmitter Mounting
Bracket (Included)



900 MHz TRANSMITTER FEATURES:

- Includes power supply, audio cables (3.5mm-RCA, digital optical), tune to Sign (w/ vinyl numbers) & mounting bracket.
- 219-Channel Selection
- Line Level Stereo Inputs
- Adjustable Audio Input Modulation Level

- Modulation Level Indicator
- Noise Reduction Technology
- Compatible with other manufactured 900MHz products
- Transmission Range 35,000+ Square Feet
- Audio In: Analog RCA-3.5mm, Digital Coax & Toslink.
- Power Requirements: 12V, 300mA, 2.1mm Barrel Connector
- THD Audio Distortion (@ 1KHz, +/- 25KHz Deviation) 0.3%
- Stereo Pilot Level -20 dBc
- Pout RF Power Output 1 mW
- FM Deviation +/- 75 KHz
- Harmonic Suppression -45 dBc
- Dimensions: 5.5" w x 1.5" w x 4.75" d
- Weight: 12 oz.
- 5-year warranty

900 MHz RECEIVER FEATURES:

- 10 key or New Retro Simplified Version
- Dual Frequency
- Previous Channel (10 Key Version)
- Easily Toggle between 900MHz and FM stations
- Multiple mounting configurations
- Durable membrane designed to withstand high volume use
- Compatible with 900MHz and FM Transmitters on the market
- Easy to program up to 52 Channel Presets
- Channel Scan
- Direct Channel Access
- Adjustable Sound Quality through Equalization
- Bright Red Low Glare LED Channel Display
- Inexpensive and easy-to-change headphone jack
- Customizable – easily brand with your logo (Retro Version)
- Dimensions: 4.5" x 2"
- Weight: 4oz
- 2-year manufacturer warranty; extended warranties available

* The brands listed are registered trademarks and do not represent an endorsement or affiliation with Broadcastvision Entertainment

Additional images of the AXS-900TXD. AXS-FMTD.



Inputs:

- Digital Optical (cable included)
- Digital COAX
- Analog RCA (cable included)
- Power (cable included)

