


REV.	DATE	DESCRIPTION
NC	02/15/03	INITIAL RELEASE

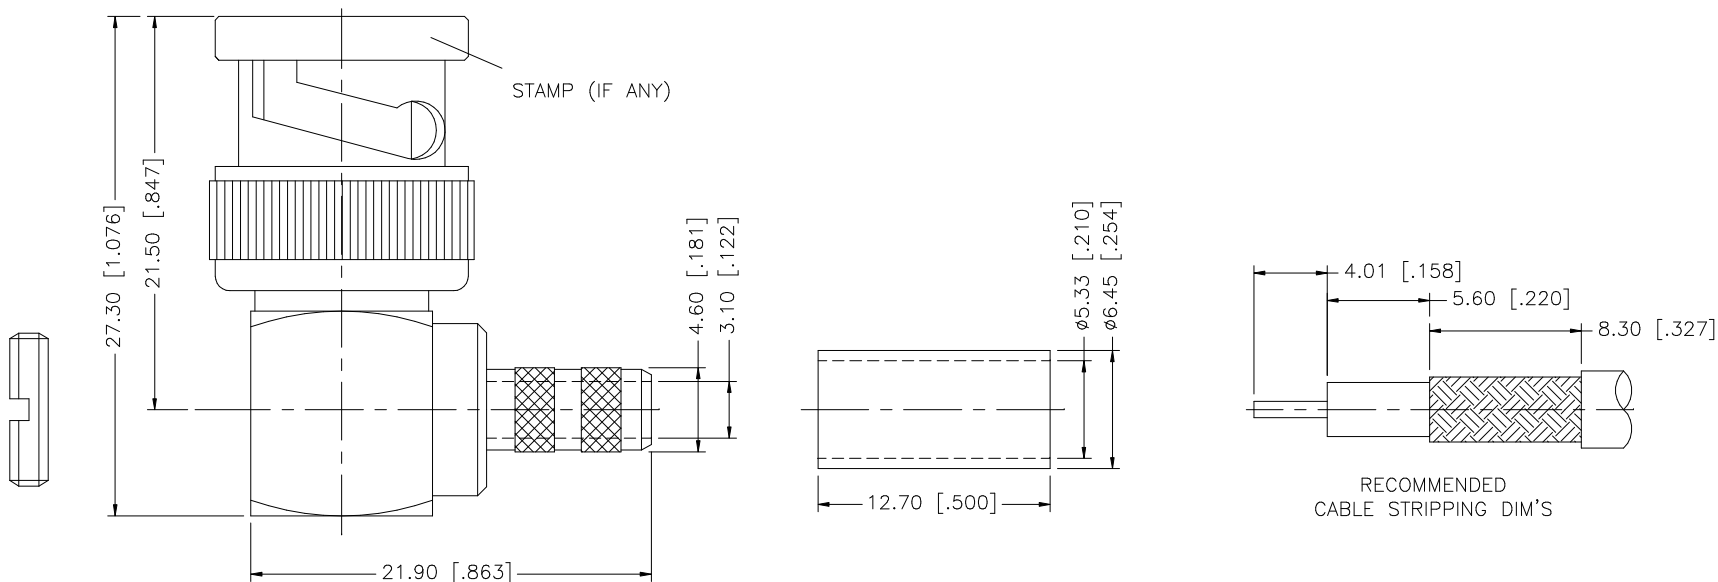

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
 2. CENTER CONTACT TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex						
7						DRAWN	G.R.S.						02/15/03	
6					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED		PART DESCRIPTION BNC R/A CRIMP PLUG (FOR RG-58/U, 141/U CABLE)						
5	NUT	BRASS	NICKEL	1		ISSUED								
4	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	SHEET	1 OF 1	PART NO. 112162						
3	CONTACT PIN	BRASS	GOLD	1										
2	INSULATOR	DELRIN	NATURAL	1					DWG. NO. 112162.DWG REV. NC SIZE A SCALE NA					
1	BODY	BRASS	NICKEL	1										
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/112/112162.DWG								