
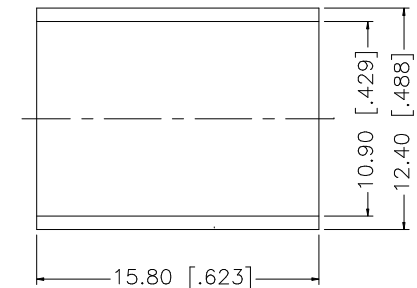
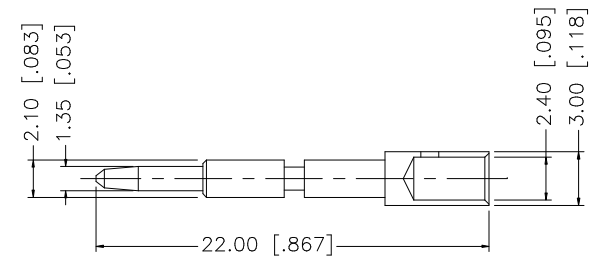
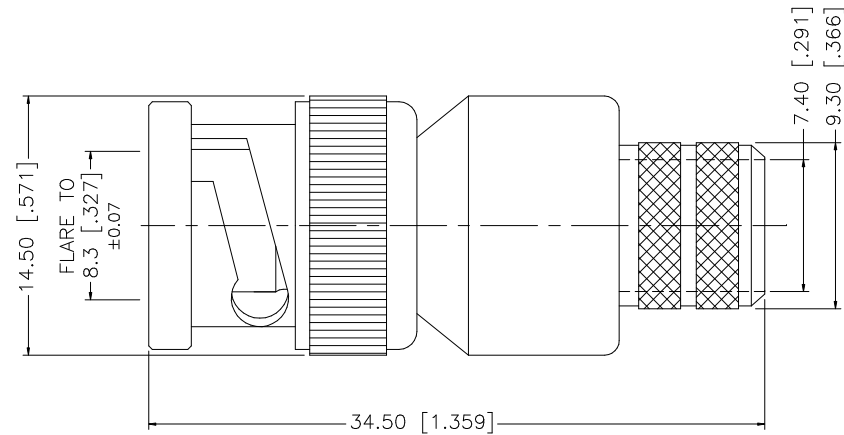


REV.	DATE	DESCRIPTION
NC	05/05/97	INITIAL RELEASE
A	02/24/03	UPDATE DRAWING FORMAT

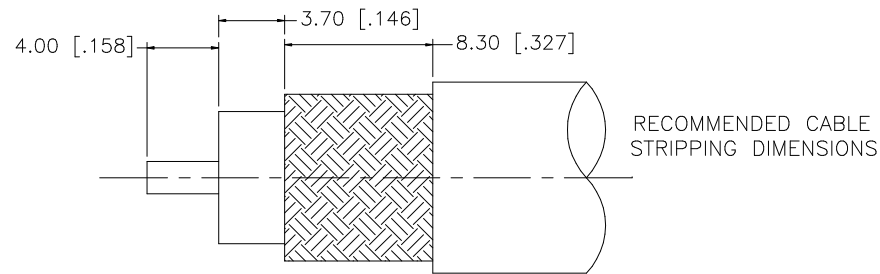

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .429"
2. CRIMPED CONTACT PIN
HEX CRIMP SIZE .100"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.								07/20/05
7						CHECKED			PART DESCRIPTION BNC CRIMP PLUG (FOR RG–8, 213 CABLE)						
6						ISSUED									
5						SHEET	1 OF 1		PART NO. 112562						
4	FERRULE	BRASS	NICKEL	1											
3	CONTACT PIN	BRASS	GOLD	1					DWG. NO. 112562.DWG						
2	INSULATOR	TEFLON	NATURAL	1											
1	SHELL/BODY	BRASS	NICKEL	1					REV. A	SIZE A	SCALE NA				
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/112/112562.DWG								