



## Four IFB MULTI LINE PHONE BRIDGE



### FEATURES


- Individual level control for IFB outputs, monitor output and send input
- Line State LEDs for quick indication of phone line condition
- AC presence and Power LEDs
- Line level XLR Send input
- Line level XLR Monitor output
- Four line level XLR IFB outputs
- RJ-22 Monitor handset jack
- Four RJ-11 phone line jacks

Four IFB is a four position analog telephone line interface designed specifically to provide flexible listen only IFB for television field production use. Each IFB output, and the monitor input / output jacks, may be separately connected to one of the four analog phone lines through the use of rotary line selector switches. A telephone handset may also be connected for communication with the Monitor phone line.

Four IFB is designed to be used in a variety of environments and weather conditions. All controls and components are dust and moisture resistant. A non-removable hinged cover protects the unit's selector switches, add/drop buttons and keypad while the enclosure design protects the volume controls from physical damage.



## Four IFB MULTI LINE PHONE BRIDGE

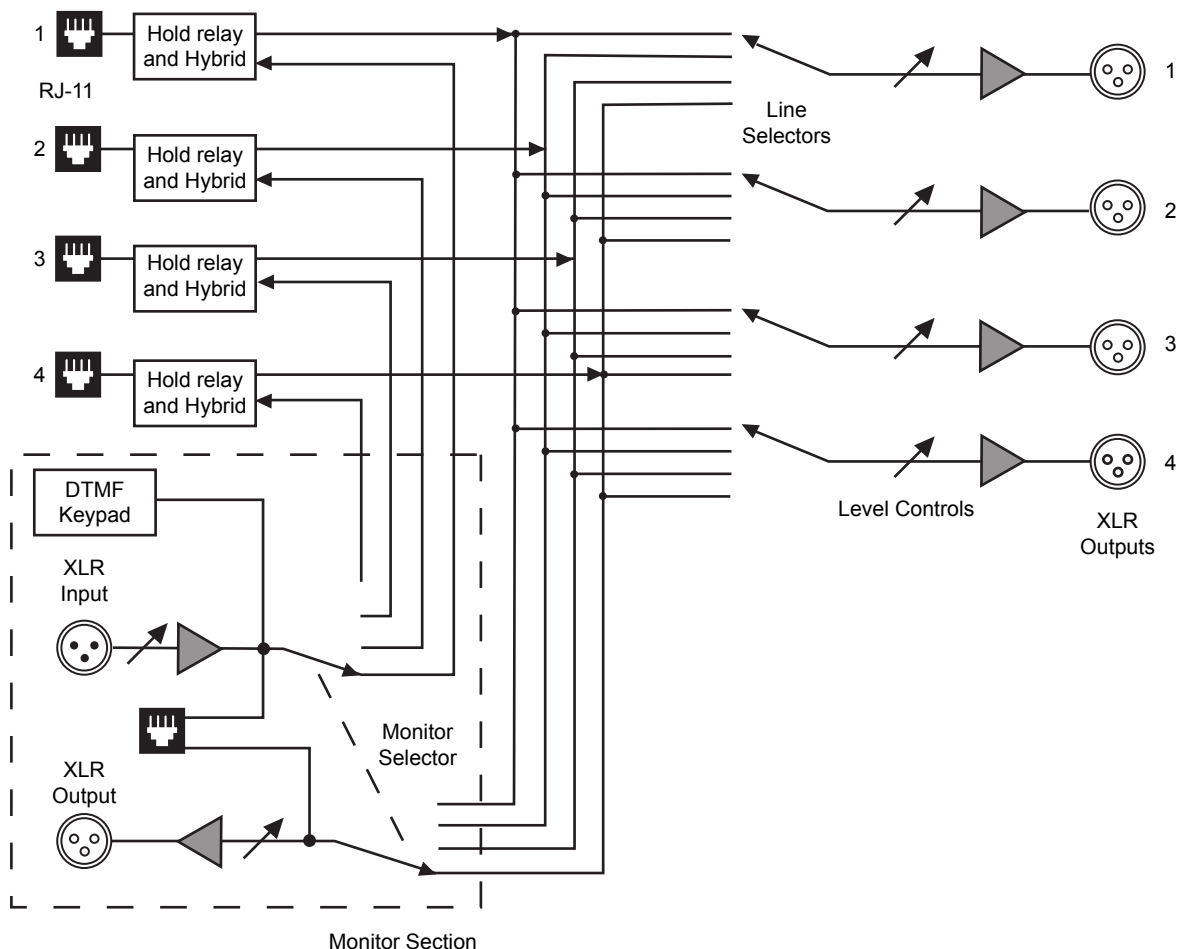

### Specifications

|               | Input               | Output               |
|---------------|---------------------|----------------------|
|               | Balanced Female XLR | 5- Balanced Male XLR |
| Impedance:    | 20k ohms            | 600 ohms             |
| Level (Line): | +4dBu max           | +4dBu max            |

|                    |   |
|--------------------|---|
| Frequency Response | Telephone Side 200 Hz - 3600 Hz                               |
| Handset            | RJ-22 handset jack biased for electret handset (not included) |
| Power              | 120-240 VAC<br>50-60 Hz, internal power supply                |
| Auxiliary Power    | Single 9VDC battery   |

|           |          |            |                                   |
|-----------|----------|------------|-----------------------------------|
| Isolation | 1500 VAC | Phone Line | 4- RJ11C                          |
| Ringer    | 0.5B REN | Size       | 10" x 9.75" x 2" (26 x 25 x 5 cm) |
|           |          | Weight     | 3.5 lbs (1.6 kg)                  |