



RemoteAmp Two

STEREO HEADPHONE AMPLIFIER



FEATURES

- XLR Line level Input
- 3.5 mm Stereo Line Input Jack
- 3.5 mm Earpiece Jack
- 1/4" Stereo Headphone Jack
- Compatible with Party Line Intercoms
- >20 Hours on one 9 Volt Battery

JK Audio combines professional audio electronics in a rugged new belt pack design.


RemoteAmp Two provides a listen only connection for mono IFB or full bandwidth stereo music listening. Separate volume controls for the XLR and 3.5 mm line input jacks allow a simple mix of mono and stereo sources. The XLR line level input accepts either a balanced mono signal, or a party line intercom feed (listen-only). The 1/2 watt, 1/4" stereo headphone jack will cut through any crowd noise. Connect an IFB earpiece to the 3.5 mm earpiece jack for operation.

RemoteAmp Two

STEREO HEADPHONE AMPLIFIER



BACK VIEW

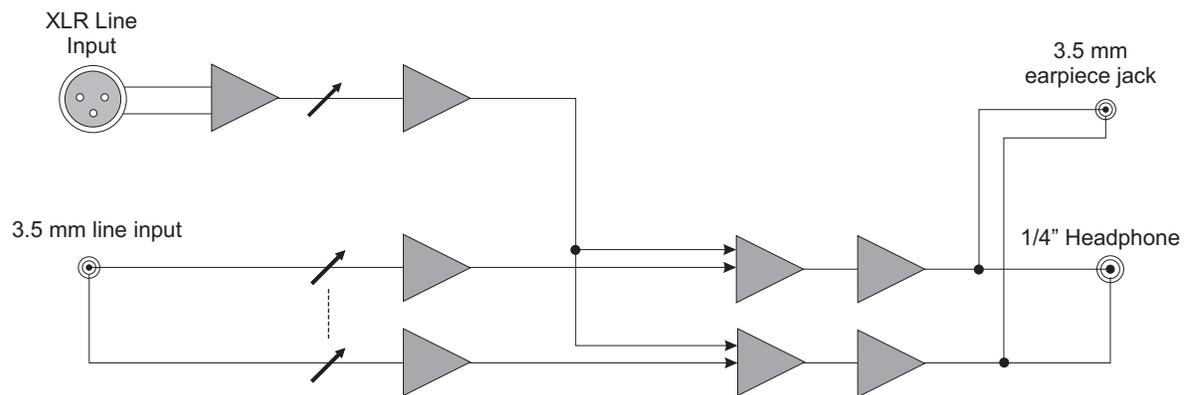

Specifications

	Input		Output	
	Female XLR Microphone	3.5mm Stereo	Earpiece Jack	Headphones 1/4"
Impedance:	20k ohms	20 k ohms	100 ohms	8 ohms
Level (Line):	(0 dBu nom)	(-10 dBu) nom	40 mW	1/2 watt per channel
Frequency Response:	20Hz – 20 kHz		Size:	4.7" x 3.75" x 1.65" (12 x 9.5 x 4.2 cm)
			Weight:	10 ounces (275 grams)