

# AN-1000X+

*Speaker Monitor*




## *Perfect for...*

- Install & Integration Projects
- Conference Rooms
- Ships & Freighters
- Theme Parks
- Classrooms
- City Council Meetings
- Lecture Halls
- Board Rooms
- Public Gatherings
- Presentations & Meetings
- and more!

**MADE IN THE USA**





**SIX YEAR WARRANTY**

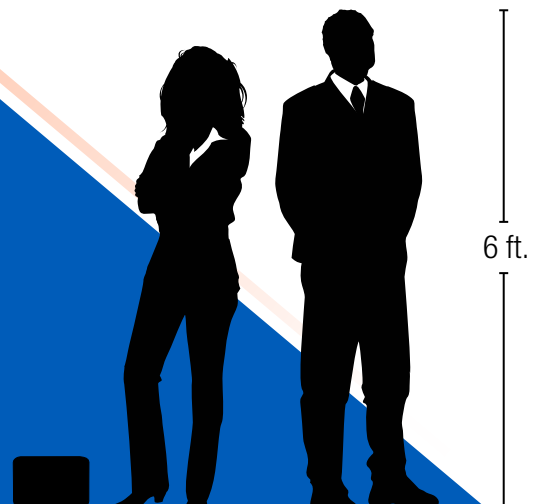

# FEATURES

- Reaches crowds of 250+
- 107 dB of clear sound
- 50W AC mode
- Optional built-in wireless receiver
- 1/4" line input
- One 4.5" woofer
- One 10 mm dome tweeter
- Built-in bracket mount screws for easy installation (bracket with allen wrench sold separately)
- 1/4" line output to daisy chain multiple units

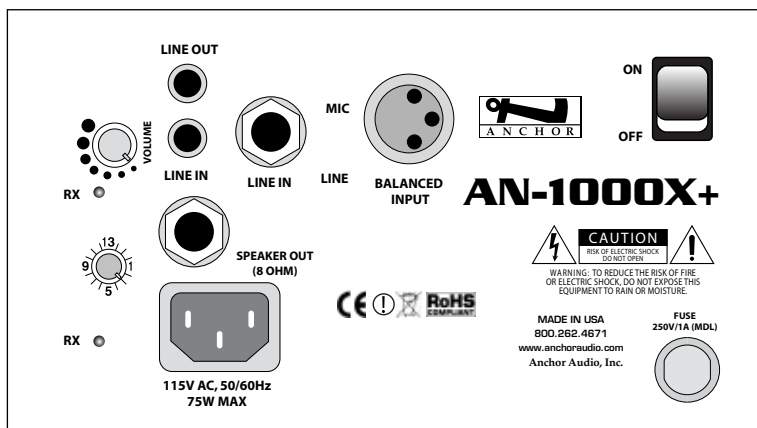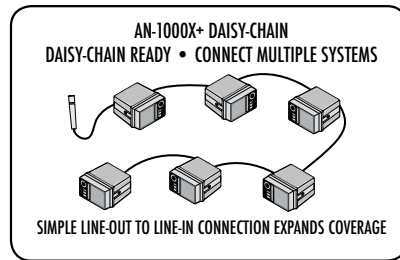

(AN-1000XF1+ Back Panel Shown)

## AN-1000X+ Models

AN-1000X+	AN-1000X+ - black
AN-1000F1X+	AN-1000XF1+ with 1 wireless receiver - black
AN-1001X+	An-1001X+ unpowered companion speaker - black
Wireless Microphones & Transmitters	
WH-8000	Wireless handheld microphone
WB-8000	Wireless beltpack transmitter (requires handsfree microphone) Microphone options include: Headband/HBM-TA4F, Collar/CM-60, UltraLite/EM-TA4F, or Lapel/LM-60
Accessories	
MIC-90	Handheld mic with 20 ft. cable (XLR plug)
SC-50	Companion speaker cable (1/4" phone plug) - 50 ft.
SC-50EX	Companion speaker cable extension (1/4" phone plug) - 50 ft.
CC-100	Carrying bag
CC-100XL	Extra large carrying bag
HC-ARMOR24-AN	Anchor Armor hard case - AN series
SS-250	Speaker stand
SB-3BK+	40° tilt ceiling mount bracket - black
SB-360BK+	360° swivel wall bracket - black
RM-1BK+	Single rack mount - black
RM-12BK+	Double rack mount - black

## Technical Specifications

Rated Power Output	50 watts continuous @ 4 Ω
Max SPL @ Rated Power	107 dB ± 3 dB @ 1 meter
Frequency Response	65 Hz – 20 kHz
Wireless Range	150' line of sight
Speaker Type	4.5" woofer, 10 mm dome tweeter
AC Power Requirements	110 - 125 VAC, 50/60 Hz 50W max
Export Model Power Requirements	208 - 240 VAC, 50/60 Hz 50W max
Fuse Rating	T 1.0A / 250V (internally mounted)
Export Model Fuse Rating	T 0.5A / 250V (internally mounted)
Dimensions (HWD)	9" x 8" x 5.5" (23 x 21 x 14 cm)
Weight	6.5 lbs / 2.9 Kg

## Technical Specifications (cont)

<b>Inputs</b>		
	Balanced	Microphone/ line configurable, female XLR, switchable phantom power
	Line	Hi-Z, unbalanced, 1/4" phone & RCA
<b>Outputs</b>		
	Line	Lo-Z, RCA, buffer isolated line-level
	speaker	8 Ω, unswitched, 1/4"-phone



(Features &amp; Specifications Subject to Change Without Notice)