

# AN-130+

*Speaker Monitor*




## *Perfect for...*

- Conference Rooms
- Presentations & Meetings
- Classrooms
- Trade Show Booths
- AV Carts
- Lecture Halls
- Board Rooms
- Install & Integration Projects
- City Council Meetings
- and more!

**MADE IN THE USA**




**SIX YEAR WARRANTY**

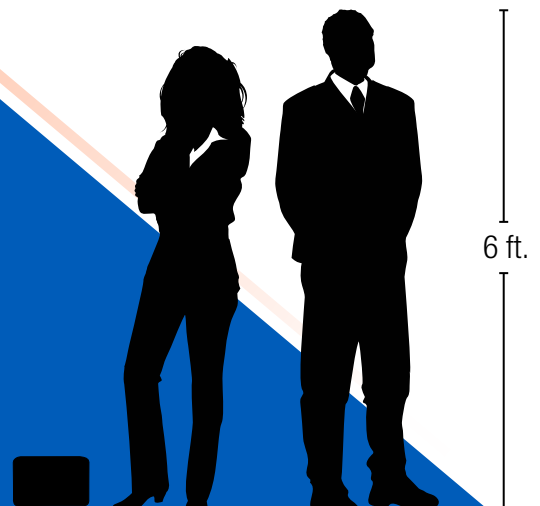

# AN-130+

## FEATURES

- Reaches crowds of 150+
- 103 dB of clear sound
- 30W AC mode
- Optional built-in wireless receiver
- 3.5 mm AUX & 1/4" line input
- 1/4" wired mic input
- One 4.5" woofer
- One 10 mm dome tweeter
- Built-in bracket mount screws for easy installation (bracket with allen wrench sold separately)
- 1/4" line output to daisy chain multiple units
- Available in black or white

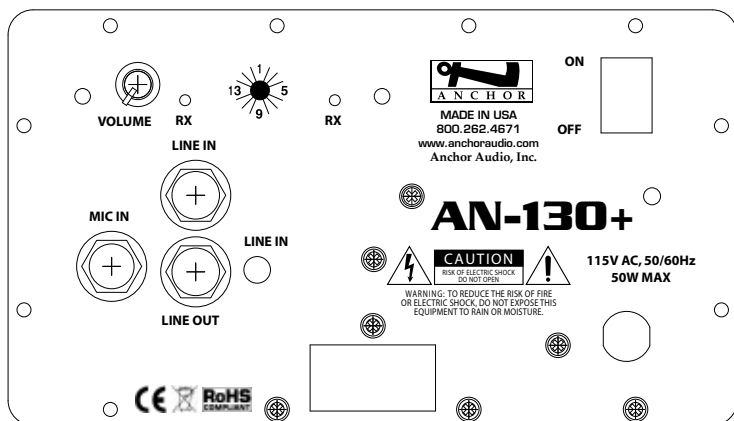

(AN-130F1+ Back Panel Shown)

AN-130+ Models	
AN-130+	AN-130+ - white
AN-130BK+	AN-130+ - black
AN-130F1+	An-130+ with 1 wireless receiver
AN-130F1BK+	An-130+ with 1 wireless receiver - black
AN-130F1RC+	An-130+ with 1 wireless receiver & remote control - white
AN-130F1RCBK+	An-130+ with 1 wireless receiver & remote control - black
AN-130RC+	An-130+ with remote control - white
AN-130RCBK+	An-130+ with remote control - black
Wireless Microphones & Transmitters	
WH-8000	Wireless handheld microphone
WB-8000	Wireless beltpack transmitter (requires handsfree microphone) Microphone options include: Headband/HBM-TA4F, Collar/CM-60, Over-the-Ear/EM-TA4F, or Lapel/LM-60
Accessories	
REMOTE-130	Infrared remote control (AN-130RC+ only)
MIC-90P	Handheld mic with 20 ft. cable (1/4" phone plug)
SC-50	Companion speaker cable (1/4" phone plug) - 50 ft.
SB-3W+/SB-3BK+	40° tilt bracket ceiling mount - white or black
SB-360W+/SB-360BK+	360° swivel wall mount - white or black
RM-1BK+	Single rack mount - black
RM-12BK+	Double rack mount - black
SS-250	Speaker stand
CC-100	Carrying bag
CC-100XL	Extra large carrying bag
HC-ARMOR24-AN	Anchor Armor hard case - AN series

### Technical Specifications

Rated Power Output	30 watts
Max SPL @ Rated Power	103 dB ±3 dB @ 1 meter
Frequency Response	65 Hz - 18 kHz ± 3dB
Wireless Range	150' line of sight
Speaker Type	4.5" woofer, 10 mm dome tweeter
AC Power Requirements	110 - 125 VAC, 50/60 Hz 50W max
Export Model Power Requirements	208 - 240 VAC, 50/60 Hz 50W max
Fuse Rating	T 1.0A / 250V (internally mounted)
Export Model Fuse Rating	T 0.5A / 250V (internally mounted)
Dimensions (HWD)	9" x 8.5" x 5.5" (23 x 22 x 14 cm)
Weight	6 lbs / 2.7 Kg

(Features & Specifications Subject to Change Without Notice)

### Technical Specifications (cont)

Inputs		
	Line(2)	Hi-Z, unbalanced
	Microphone	Lo-Z, unbalanced, 1/4" phone
Output		
	Line	Lo-Z, buffered, 1/4" phone & 3.5mm phone
Sensitivity for Rated Output		
	Line	-20 dBV (100 mVrms)
	Microphone	-43 dBV (7.5 mVrms)

