
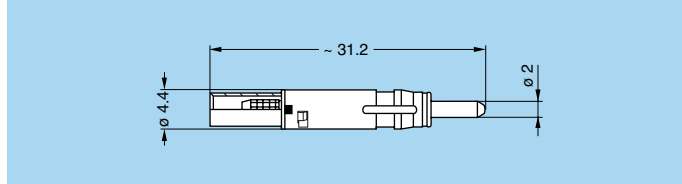




## Fibre Optic Contact

### FFS.F2 Male F2 Fibre Optic Contact

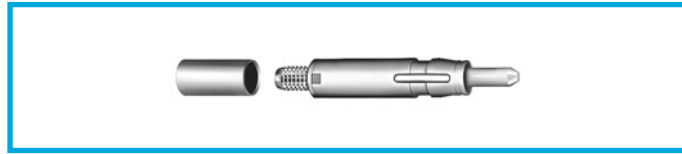

| Part number      | Models             |
|------------------|--------------------|
| FFS.F2.BA2.LCT10 | PHW, PEW, PBW, PUW |
| FFS.F2.BA2.LCE30 | EDW, ENW, EBW      |

### PSS.F2 Female F2 Fibre Optic Contact

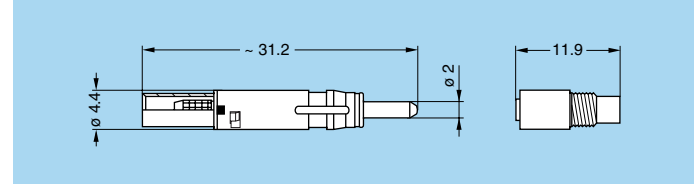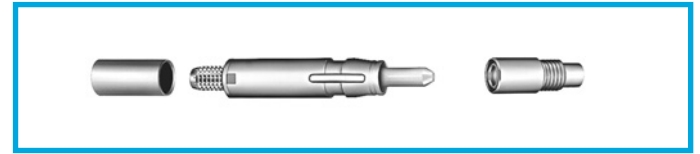


| Part number      | Models        |
|------------------|---------------|
| PSS.F2.BA2.LCT10 | FGW, FMW, FUW |
| PSS.F2.BA2.LCE30 | FXW           |

**Note:** The above contacts are fitted with a 125 micron bore ferrules. If as an alternative 126 micron bore ferrule is required the «BA2» in the part number should be replaced with the reference «BB2».

## Accessories


### Cable adapter type «T» for FGW, FMW, PHW, PEW and PBW

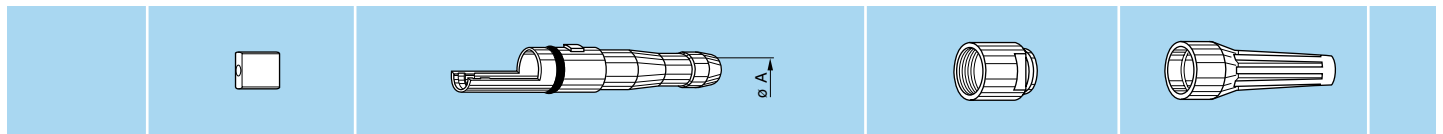

| Reference |    | Part number of the anchor with screws | Adapter ø A | Cable ø |      | Part number of the adapter with gasket | Part number of the collet nut | Bend relief to be used <sup>1)</sup> | Cable group |
|-----------|----|---------------------------------------|-------------|---------|------|----------------------------------------|-------------------------------|--------------------------------------|-------------|
| Type      | ø  |                                       |             | max.    | min. |                                        |                               |                                      |             |
| T         | 90 | FGW.3K.145.ZZA                        | 9.1         | 9.0     | 8.1  | FGW.3K.890.TNN                         | FFM.3E.130.●●                 | GMA.3B.080.DN                        | 1           |
| T         | 96 | FGW.3K.146.ZZA                        | 9.6         | 9.5     | 8.6  | FGW.3K.896.TNN                         | FFM.3K.131.●●                 | GMA.3B.090.DN                        | 2, 4        |
| T         | 12 | FGW.3K.147.ZZA                        | 12.6        | 12.5    | 11.6 | FGW.3K.812.TNV                         | FFM.3K.132.●●                 | GMA.4B.011.DN                        | 3           |

**Note:** <sup>1)</sup> The last letter «N» on the part number indicates black colour of the bend relief. For ordering a bend relief with another colour see table on page 92 and replace the letter «N» by the letter of the colour required.

### Collet adapter type «C» for FUW and PUW

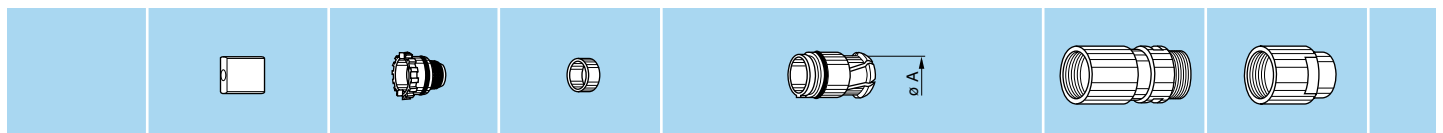

| Reference |    | Part number of the anchor with screws | Part number of earthing body with o-ring | Part number of crimp ring | Collet ø A | Cable ø |      | Part number of collet with gaskets | Part number of extended shell | Part number of the collet nut | Cable group |
|-----------|----|---------------------------------------|------------------------------------------|---------------------------|------------|---------|------|------------------------------------|-------------------------------|-------------------------------|-------------|
| Type      | ø  |                                       |                                          |                           |            | max.    | min. |                                    |                               |                               |             |
| C         | 96 | FGW.3K.146.ZZA                        | FFS.3K.130.LNV                           | FFS.3K.160.DN             | 9.6        | 9.5     | 8.6  | FUW.3K.796.ZZS                     | FUW.3K.137.●●                 | FUW.3K.130.●●                 | 2, 4        |

**Note:**  
 ●● = LC for chrome-plated brass version  
 ●● = AZ for stainless steel version

All dimensions are in millimeters.



### Insulator for plug

| Part number   | Contact type |       |
|---------------|--------------|-------|
|               | Signal       | Power |
| EGW.3K.444.EL | Female       | Male  |

**Note:** Insulator should be ordered as replacement item.



### Insulator for socket

| Part number   | Contact type |        |
|---------------|--------------|--------|
|               | Signal       | Power  |
| FGW.3K.344.EL | Male         | Female |

**Note:** Insulator should be ordered as replacement item.



### Crimp contacts

| Ø Contact LV | Contact function    | Contact part number |                |
|--------------|---------------------|---------------------|----------------|
|              |                     | Male                | Female         |
| 0.9          | Signal              | FGG.3B.560.ZZC      | EGG.3B.660.ZZM |
| 1.3          | Power <sup>1)</sup> | FGW.3K.565.ZZC      | EGW.3K.666.ZZM |


**Note:** <sup>1)</sup> Power contacts are special with an oversized crimp barrel. Crimp contacts should be ordered as replacement items.



### PSS Alignment device for F2 fibre optic contacts

| Part number    |
|----------------|
| PSS.F2.290.NZZ |

**Note:** Alignment device should be ordered as replacement item.



### GMF.3K Bend relief with cap for FUW plug

| Part number     |
|-----------------|
| GMF.3K.085.EANZ |


● Material: black EPDM



### GMP.3K Bend relief with cap for PUW free socket

| Part number     |
|-----------------|
| GMP.3K.085.EANZ |

● Material: black EPDM



### GMF.3K Coloured ring for bend relief with cap

| Part number   | Colour |
|---------------|--------|
| GMF.3K.265.RG | grey   |
| GMF.3K.265.RN | black  |
| GMF.3K.265.RR | red    |
| GMF.3K.265.RV | green  |

● Material: Silicone