

Overview

The Rackmount Balun Chassis 16 is designed as a head-end cable management solution to allow any combination of MuxLab square baluns to be installed in a 19" relay rack. Head-end AV equipment such as DVD players, video servers and sat boxes may be installed in a local wiring closet and connected to the Cat5 structured cabling system via a wide array of MuxLab balun solutions.

The panel is custom-tailored to allow any combination of up to sixteen (16) MuxLab baluns to be installed. The baluns may be installed with the RJ45 either front or rear facing depending on where the Cat5 cabling will enter or exit the system. At the display end, the appropriate MuxLab baluns are installed at the display to support a fully Cat5 cabling solution.

Each balun snaps into place and is held firmly by a spring latching mechanism. The one-piece design makes the product easy to install and maintain. There are no parts to lose or replace. Blank Filler Modules (500901) may be ordered separately to fill in unused slot positions.

Applications

Custom AV installations
Head-end audio-video systems
Home AV systems
Boardroom systems
Digital signage systems



Features & Benefits

Space efficient – 2U height
One-piece design
Latching mechanism for secure installation
Supports up to sixteen (16) baluns
Snap-in design for ease of installation
Baluns install forward or rear-facing
Includes four (4) rackmount screws and washers
Slot number silkscreen on front and rear.
Blank Filler Modules (500901) sold separately.


Environment	Custom audio-video systems in a structured cabling environment.
Application	Head-end installations, audio-video rooms, telecom rooms.
Capacity	Sixteen (16) positions.
Compatible baluns	MuxLab baluns measuring: 2.4" x 2.25" x 1" (6.1 x 5.7 x 2.5 cm).
Orientation	Baluns may be installed front or rear facing.
Snap-in mechanism	Baluns lock into position via spring latch mechanism.
Rack height	2U (3.5").
Enclosure	Black painted steel
Mounting holes	Four (4) rack mounting holes
Mounting hardware	Four (4) rack mounting 10-32 screws and washers are included.
Slot Id	Silkscreen on front and rear. Slots numbered "1" to "16".
Dimensions	19" (W) x 3.5" (H) x 3.0" (D) (48 cm x 8.9 cm x 7.6 cm).
Weight	1.9 lbs (.86 kg).
Standards	EIA/TIA.
Warranty	Lifetime.
Order Information	500900 Rackmount Balun Chassis 16 500901 Blank Filler Modules for 500900 (Package of 4)

MuxLab Inc.

8114 Trans Canada Hwy, St. Laurent, Quebec, H4S 1M5
Tel: (514) 905 0588 Fax: (514) 905 0589
Toll Free: 877 689-5228 (North America)
E-mail: videoease@muxlab.com
URL: www.muxlab.com

Rackmount Balun Chassis 16 500900

Typical Application

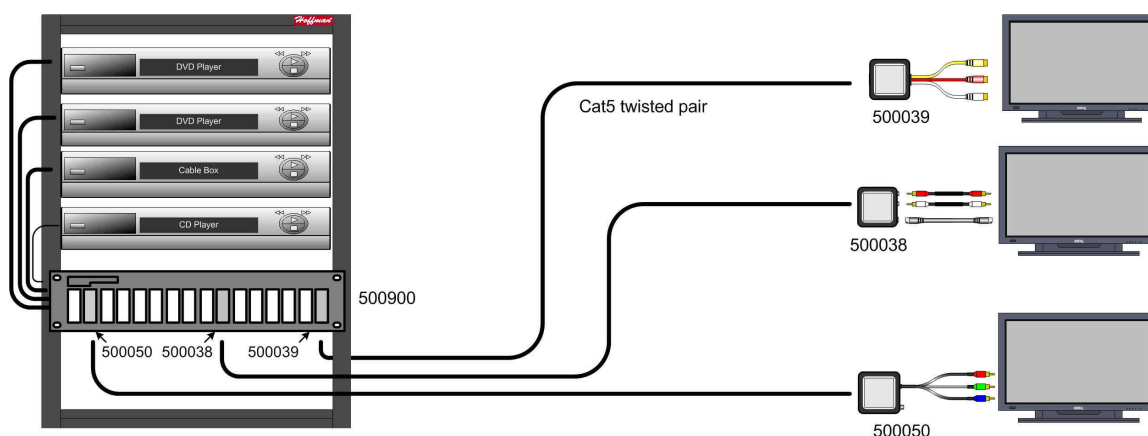

Fully loaded - front view



Fully loaded - rear view



Blank Filler Module (500901)
(Package of 4)



Blank Filler Modules (500901) in eight (8) slots

MuxLab Inc.

8114 Trans Canada Hwy, St. Laurent, Quebec, H4S 1M5

Tel: (514) 905 0588 Fax: (514) 905 0589

Toll Free: 877 689-5228 (North America)

E-mail: videoease@muxlab.com

URL: www.muxlab.com