

AT2050

MULTI-PATTERN CONDENSER MICROPHONE



- Three switchable polar patterns: omni, cardioid, figure-of-eight
- Dual-diaphragm capsule design maintains precise polar pattern definition across the full frequency range of the microphone
- Switchable 80 Hz high-pass filter and 10 dB pad
- State-of-the-art surface-mount electronics ensure compliance with A-T's stringent consistency and reliability standards
- Dual large diaphragms are gold-vaporized and aged to achieve optimum characteristics over years of use

The AT2050 is intended for use in professional applications where remote power is available. It requires 11V to 52V DC phantom power, which may be provided by a mixer or console, or by a separate, in-line source such as the Audio-Technica AT8801 single-channel or CP8506 four-channel phantom power supplies.

Output from the microphone's XLRM-type connector is low impedance (Lo-Z) balanced. The signal appears across Pins 2 and 3; Pin 1 is ground (shield). Output phase is "Pin 2 hot" – positive acoustic pressure produces positive voltage at Pin 2.

To avoid phase cancellation and poor sound, all mic cables must be wired consistently: Pin 1-to-Pin 1, etc.

An integral 80 Hz hi-pass filter provides easy switching from a flat frequency response to a low-end roll-off. The high pass position reduces the microphone's sensitivity to popping in close vocal use. It also reduces the pickup of low-frequency ambient noise (such as traffic, air-handling systems, etc.), room reverberation and mechanically-coupled vibrations.

In use, secure the cable to the mic stand or boom, leaving a slack loop at the mic. This will ensure the most effective shock isolation and reduce the possibility of accidentally pulling the microphone out of its mount.

Avoid leaving the microphone in the open sun or in areas where temperatures exceed 110° F (43° C) for extended periods. Extremely high humidity should also be avoided.

AT2050 SPECIFICATIONS†


ELEMENT	Externally polarized (DC Bias) condenser
POLAR PATTERNS	Cardioid, Omnidirectional, Figure-of-Eight
FREQUENCY RESPONSE	20-20,000 Hz
LOW FREQUENCY ROLL-OFF	80 Hz, 12 dB/octave
OPEN CIRCUIT SENSITIVITY	-42 dB (7.9 mV) re 1V at 1 Pa*
IMPEDANCE	120 ohms
MAXIMUM INPUT SOUND LEVEL	149 dB SPL, 1 kHz at 1% T.H.D.; 159 dB SPL with 10 dB pad (nominal)
NOISE¹	17 dB SPL
DYNAMIC RANGE (typical)	132 dB, 1 kHz at Max SPL
SIGNAL-TO-NOISE RATIO¹	77 dB, 1 kHz at 1 Pa*
PHANTOM POWER REQUIREMENTS	11-52V DC, 4.7 mA typical
SWITCHES	Pattern selection; Flat, roll-off; 10 dB pad (nominal)
WEIGHT	412 g (14.5 oz)
DIMENSIONS	170.0 mm (6.69") long, 52.0 mm (2.05") maximum body diameter
OUTPUT CONNECTOR	Integral 3-pin XLRM-type
ACCESSORIES FURNISHED	AT8458 Shock mount for 5/8"-27 threaded stands; 5/8"-27 to 3/8"-16 threaded adapter; soft protective pouch

†In the interest of standards development, A.T.U.S. offers full details on its test methods to other industry professionals on request.

*1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL

¹ Typical, A-weighted, using Audio Precision System One.

Specifications are subject to change without notice.

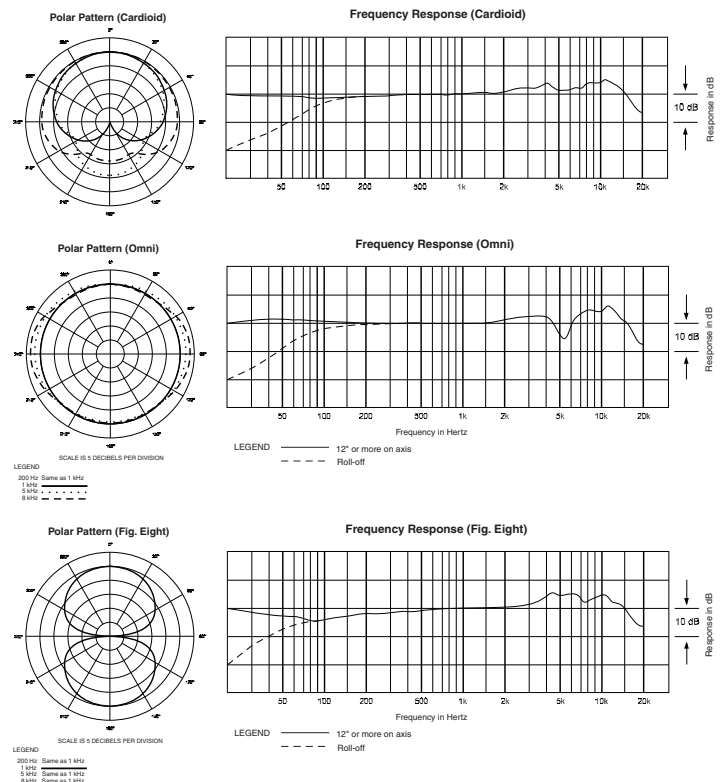

Audio-Technica U.S., Inc., 1221 Commerce Drive, Stow, Ohio 44224
 Audio-Technica Limited, Old Lane, Leeds LS11 8AG England
www.audio-technica.com

