

OM5 DYNAMIC VOCAL MICROPHONE

OVERVIEW:

Designed, assembled and tested by Audix in the USA, the OM5 is a dynamic vocal microphone used for stage, studio and broadcast applications. The OM5 is known for its clarity, resistance to feedback and ability to handle SPL (Sound Pressure Levels) in excess of 144 dB without distortion.

The OM5 is characterized with an extremely tight and uniformly controlled hypercardioid polar pattern which helps to isolate the vocals from the rest of the instruments on stage. With a wide frequency range of 48 Hz - 19 kHz, the OM5 employs a VLM™ (Very Low Mass) diaphragm for natural response, accurate sound reproduction and exceptional transient response.

The OM5 is naturally attenuated at 120 Hz to reduce boominess and handling noise. The mid-range is tailored for presence allowing the vocalist to be more easily heard in the mains as well as the monitors. The OM5 is comfortable to hold, durable and manufactured with high standards and tight tolerances.

The OM5 includes a precision die cast zinc alloy body, black E-coat finish, laser etched model and serial number, steel mesh grill, Switchcraft® or Audix XLR connector and heavy duty nylon clip.

SUPPLIED ACCESSORIES:

Heavy duty nylon mic clip (MC1)
Carrying pouch (P1)

OPTIONAL ACCESSORIES:

WS357 - External foam windscreen
CBL-20 - 20' XLR-XLR Low noise microphone cable
T50K - Low to high impedance matching transformer



FEATURES:


- Clear, accurate vocal reproduction
- Handles high SPL without distortion
- Low handling noise
- Provides exceptional gain before feedback
- Provides maximum vocal isolation on stage
- Dent resistant spring steel grill
- 5 year warranty

APPLICATIONS:

- Lead or backing vocals
- Live recording
- Broadcast
- Home studio - vocal and instrument
- Sax, brass, guitar, dobro, flute, percussion, drums



MC1



WS357



CBL20





T50K

SPECIFICATIONS:

Transducer Type	Dynamic
Frequency Response	48 Hz - 19 kHz
Polar Pattern	Hypercardioid
Output Impedance	200 ohms
Sensitivity	2 mV / Pa @ 1k
Capsule Technology	VLM Type C
Off Axis Rejection	>30 dB
Maximum SPL	≥144 dB
Power Requirements	None
Connector	Switchcraft® or Audix male XLR
Polarity	Positive pressure on diaphragm produces positive voltage on pin 2 relative to pin 3 of output XLR connector
Housing / Finish	Zinc Alloy / Black E-coat
Weight	307 g / 10.8 ounces
Length	176 mm / 6.9 inches

FREQUENCY / POLARS:

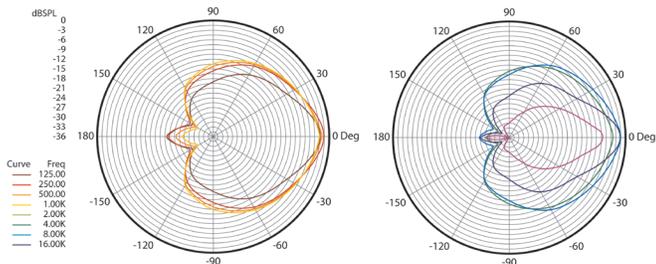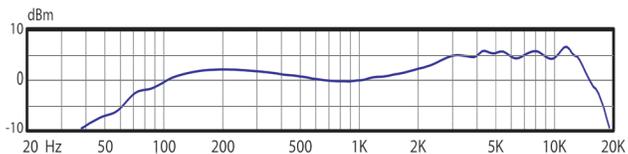

ARCHITECTS AND ENGINEERS SPECIFICATIONS:

The microphone shall be of the dynamic type and the polar pattern of the microphone shall be hypercardioid. The nominal output impedance shall be equal to 200 ohms at 1 kHz. The microphone shall have a sensitivity of 1.8 mV / Pa at 1 kHz and a sound pressure level ≥144 dB. The microphone body shall be machined of die cast zinc alloy and the grill cap shall be steel wire mesh. The overall dimensions shall be 23 mm in diameter at the base, 53 mm in diameter at the widest point on the grill and 176 mm in length. The microphone shall be the Audix OM5.


OPERATION:

The OM5 is a low impedance microphone and should be plugged into the "mic level" input of your console, mixer or recording device. Please note that your microphone does not require phantom power and will not be effected in any way by phantom power should it be running simultaneously while the microphone is in operation. Avoid plugging or unplugging the microphone from the PA system unless the channel is muted or the volume of the system turned down. Failure to do so may result in a loud "popping" noise which could seriously damage the speakers in the PA system.

USER TIPS:

The OM5 has an extremely tight pick-up pattern in order to help eliminate sound from other instruments on stage from "bleeding" into the microphone. For best results, it is important to sing directly into the mic at close proximity (within 2 inches). When using floor monitors, position the microphone so that it is parallel to the floor. When using multiple microphones on a live performance stage, allow a distance of 2-3 feet between mics to avoid phase issues. *Further miking techniques may be found on our website at www.audixusa.com

DIMENSIONS (mm):

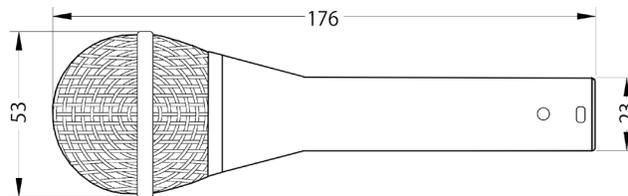

***All specifications subject to change without notice.

SERVICE AND WARRANTY:

This microphone is under warranty for a period of 5 years from any and all manufacturing defects. Should your microphone fail in any way, please contact the Audix Service department at 503-682-6933. A Return Authorization number is required before returning any products.

CARE AND MAINTENANCE:

The OM5 is manufactured to exacting specs with roadworthy construction. However, the capsule is highly sensitive and should be handled with care. Avoid extreme temperatures and be sure to store your microphone in the pouch provided when not in use. Moisture of any kind can adversely affect the sound and performance of your microphone.



www.audixusa.com
503-682-6933 Fax: 503-682-7114
Audix Corporation 9400 SW Barber St. Wilsonville, OR 97070



LITOM5T 1.1

AUDIX WARRANTY REGISTRATION FORM

Name: _____ Model: _____
 Company: _____ Serial Number: _____
 Address: _____ Store: _____
 City: _____ Store Location: _____
 Prov./State: _____ Zip: _____ Purchase Date: _____
 Phone: () _____ Signature: _____
 Email: _____ Date: _____

Please Check all that apply:

Male Female

Age:

- 18 or Under
- 19-25
- 26-35
- 36-45
- 46-55
- 55 +

Occupation:

- Musician
- Producer
- Sound Eng.
- Radio/TV
- Production
- Other _____

Primary Instruments:

- Vocal
- Guitar / Bass
- Drums
- Keyboard
- Brass
- Woodwinds
- Strings
- Other _____

Product to be used for:

- Pro live sound
- Pro recording
- Home recording
- Rehearsal
- Installation
- School
- House of Worship
- Other _____

How did you hear about Audix?

- Magazine Ad
- On-line Store
- Salesman
- Online Ad
- Friend
- Other _____

Do you own other Audix Products? Yes No

Model(s) _____

Have you visited the Audix website? Yes No

Please register your product online at www.audixusa.com or mail this form to:
 Audix Microphones P.O. Box 4010 Wilsonville, OR 97070