



"Bridging today's video with tomorrow's fiber optics."

**Miniature Fiber Optic 3Gb/s SDI
Digital Video Transport Systems**

Mini-3GHD

3Gb/s SDI
→
1

"SMPTE-424M 3Gb/s SDI"

"SMPTE-292M HD"

"SMPTE-259M SDI"

"DVB-ASI"



***"High performance and affordable solutions for your
broadcast HD-SDI video transmission."***

Applications

Remote 3Gb/s SDI Video Transport

ENG/EFP 3Gb/s SDI Video
Transmission

Pre-production and Post-production
3Gb/s SDI Video Links

Features

Transport Multi-rate HD-SDI Digital
Video Over Fiber

Reliable Transmission Over Multimode
or Singlemode Fiber

Video Pathological Test Code Compliant

Latch-Locking Power Connector

Same Model Compatible for either
Multimode or Singlemode Fiber

12-Slot Card Chassis Option

The Mini-3GHD Series is a miniature, Fiber Optic 3Gb/s SDI Digital Video Transport System, supporting the new 1080p 3Gbps SDI format. The standard Mini-3GHD system is designed to transport one (1) channel SMPTE-424M 3Gb/s SDI, SMPTE-292M HD-SDI or SMPTE-259M SDI serial digital video signal over long distance through either singlemode or multimode fiber with the same model.

Due to the use of advanced digital fiber optic transmission technology, no user adjustments are required in the Mini-3GHD system, enabling quick setup and trouble-free operation. The Mini-3GHD can handle SDI, DVB-ASI, HD-SDI, 3G-SDI, and many other video formats. The power connector has a latch-locking mechanism, thus no power disruption due to mis-handling problem.

The Mini-3GHD comes with a rugged, standalone, miniature unit. Panel connectors are provided for digital video (BNC connector) and fiber connection (ST-type for the singlemode and multimode version). Rackmount card chassis option is also available.



DOING MORE WITH ONE FIBER



Mini-3GHD

Miniature Fiber Optic 3Gb/s SDI Digital Video Transport Systems

Broadcast Transmission Systems



Digital Video

Signal Format	SMPTE-424M 3Gb/s SDI SMPTE-292M HD-SDI or SMPTE-259M SDI Digital Video and many others
Data Rate	3 Gbps
Signal Level	800mVp-p +/- 10%
Return Loss	> 15 dB
Connector	75 Ohm BNC

Physical

Dimension: (H x W x D)	0.75" x 0.65" x 2.0"
Power Level	+5 VDC @ 0.5 A
Operating Temperature	0 to +50°C
Humidity	0 to 95% RH, non-condensing

Optical

Fiber Type	Multimode and Singlemode
Number of Fibers	1
Fiber Optic Connector	ST (Multimode and Singlemode)

Optical


Typical Power Budget and Transmission Distance

Application	Power Budget (1)	Typical Distance KM (2)	Typical Distance Miles (2)
Multimode Fiber	16	0.3	0.2
Singlemode Fiber	16	30	22

(1) These are typical values for the Mini-3GHD Series. The actual values may vary.

(2) These are typical distance coverage figures. The maximum distance coverage may be greater than these typical numbers, depending on fiber type, fiber bandwidth, connector splicing losses, chromatic dispersion, environmental factors, etc.

Application

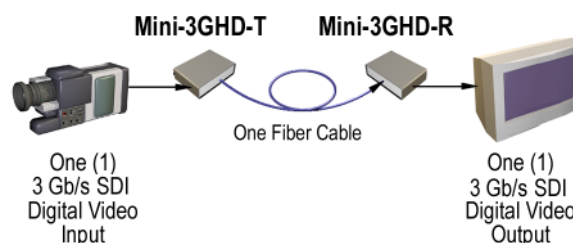

Ordering Information

Mini-3GHD-T-MS-ST	Transmitter, Multimode or Singlemode, 1-Fiber	➔ (1-Fiber) 3Gb/s SDI
Mini-3GHD-R-MS-ST	Receiver, Multimode or Singlemode, 1-Fiber	

DOING MORE WITH ONE FIBER

Subject to continued product enhancement, we reserve the right to change the above specifications and description without notice.

