

CL108/CL108T

Ultra-Compact 150-Watt, 2-Way, 8 Ω Loudspeaker System and 70.7 V / 100 V Loudspeaker System



bracket included



bracket included

Features

- 150-Watt 8" low-frequency transducer provides deep bass for small to medium sized rooms
- Constant directivity 90° H x 70° V rotatable waveguide with 1" high-frequency transducer
- Passive crossover with overload circuitry ensures optimal driver protection
- 5-position terminal strip provides amplifier connection to internal 100-Watt 70/100 V transformer (CL108T/CL108T-WH)
- Internally braced and acoustically inert 15° trapezoidal birch plywood enclosure ideal for array applications
- Multiple threaded inserts for flexible installation including Omnimount™ bolt pattern; includes matching yoke bracket
- Powder coated steel grille wrapped with acoustically transparent fabric and foam matching cabinet color
- Available in either black (CL108/CL108T) or white (CL108-WH/CL108T-WH)

CL108/CL108T

Ultra-Compact 150-Watt, 2-Way, 8 Ω Loudspeaker System and 70.7 V / 100 V Loudspeaker System

Product Overview

The EUROCOM CL108/CL108T is an ultra-compact professional two-way loudspeaker system that is ideal for a wide variety of fixed installation applications. Featuring clean lines and a unique fabric-finished wrap-around grille, the CL108/CL108T is fully at home in even the most elegant settings, including theaters and auditoria, houses of worship, themed entertainment, and sporting venues. Perfect for mains in small venues, the CL108/CL108T also excels for fill and delay systems in larger rooms.

Built of high-quality laminated Baltic birch plywood, the CL108/CL108T's lightweight cabinet combines natural rigidity and acoustic inertness with the additional strength of internal steel bracing. Threaded mounting-point inserts in the internal brackets provide a rated load factor of at least 10 times overall cabinet weight, making the CL108/CL108T exceptionally safe for flown installation, either singly or in arrays.

The CL108/CL108T achieves fully-professional performance and reliability with newly-designed components whose frequency response, sensitivity, and power handling are all custom-tailored for CL Series loudspeakers. BEHRINGER maintains complete control over quality and sonic character by manufacturing all CL Series components—starting with the pulp used for cone fabrication—in our own factories.

A 8" (200 mm) low frequency driver providing full, rich lows is matched to a 1" (25 mm) high frequency driver via an internal passive crossover at 2 kHz to deliver clear, smooth sound across the entire audible spectrum. A rotatable waveguide allows optimal application of the 90° x 70° coverage pattern regardless of speaker orientation, which may be either vertical or horizontal.

Every aspect of the CL108/CL108T has been thought through to maximize value and convenience for both the installer and the end user. The result is an attractive, durable, installation-ready loudspeaker system that will deliver top-notch sound day-after-day for years to come.

Technical Specifications

- Frequency range (-10 dB) 53 Hz - 20 kHz
- Frequency response (±3 dB) 60 Hz - 15 kHz
- Nominal dispersion 90° H x 70° V
- Directivity factor (Q) 7.5
- Directivity index (DI) 8.8 dB
- Sensitivity (1 W @ 1 m passive) (half space) 91 dB
- Crossover modes Passive
- Crossover frequency 2 kHz
- Power handling (long term, IEC passive) 150 W RMS @ 100 W RMS 34.6 V

Transducers

- Nominal impedance 8 Ω
- Low frequency driver 8" @ 150 W
- High frequency driver 1" @ 20 W
- Horn waveguide 90° H x 70° V, rotatable
- Maximum continuous SPL (passive) 113 dB
- Maximum peak SPL (passive) 119 dB
- Overload protection Full range power limiting to protect drivers and crossovers

	CL108	CL108T
• Transformer	70 V: 12.5 W, 25 W, 50 W, 100 W	100 V: 25 W, 50 W, 100 W
• Enclosure	Trapezoidal 15° side angle, laminated birch plywood	
• Grille	Steel	
• Rigging points	14 x M6 threaded points; 4 x M6 threaded inserts for OmniMount™ 30 series	
• Termination	NL4 and 4-position terminal strip connection	5-position terminal strip connection
• Dimensions (H x W x D)	19.3 x 10.2 x 11.3" / 490 x 260 x 288 mm	
• Weight	20.9 lbs / 9.5 kg 23.6 lbs / 10.7 kg	
• Included accessories	Yoke and bracket	

* Optional accessories Model CLFK array bracket

CL108/CL108T

Ultra-Compact 150-Watt, 2-Way, 8 Ω Loudspeaker System and 70.7 V / 100 V Loudspeaker System

Architect's and Engineer's Specifications

Summary description: The loudspeaker shall be a professional 2-way fixed-installation loudspeaker system in a steel-braced plywood enclosure using a bypassable internal crossover network with a 8" / 200 mm low-frequency cone transducer and a waveguide-mounted 1" / 25 mm high-frequency dome driver.

Drivers: The loudspeaker system shall use two transducers:

- Low-frequency driver shall be a 8" / 200 mm direct-radiating cone transducer
- High-frequency driver shall be a 1" / 25 mm phenolic dome transducer mounted on a rotatable 90° x 70° waveguide constructed of polypropylene

Enclosure: The loudspeaker system shall be housed in an enclosure constructed of laminated birch plywood that is internally braced with steel. The enclosure shall be finished with durable, scuff-free black or white paint. The front of the enclosure shall be protected with a perforated grille of powder-coated structural steel behind fabric-wrapped acoustically transparent foam. The back of the enclosure shall have a recessed steel input plate for connectors.

Rigging and mounting: The exterior of the enclosure shall be fitted with 14 M6 threaded rigging points. The rear of the enclosure shall have 4 M6 threaded inserts for OmniMount™ 30 series. The enclosure shall provide attachment points for an optional yoke bracket.

I/O and connectors: The loudspeaker shall have the following connectors:

- One NL4 connector, wired in parallel as a full-range input to the passive crossover (CL108)
- One 4-position terminal strip with captive wire clamps and removable plastic cover, with IN terminals wired in parallel to OUT terminals and to the NL4 connectors (CL108)
- One 5-position terminal strip with captive wire clamps and removable plastic cover, with 70 V and 100 V terminals wired to the primary side of the matching transformer (CL108T)

Performance criteria: The loudspeaker system shall meet the following performance criteria:

- Nominal impedance shall be 8 Ω for models CL108 / CL108-WH
- CL108 / CL108T-WH Transformer taps shall be 12.5 W, 25 W, 50 W, 100 W (70.7 V), 25 W, 50 W, 100 W (100 V)
- Sensitivity (1 W / 1 m passive) shall be 91 dB
- Usable frequency range (-10 dB) shall be 53 Hz - 20 kHz
- Frequency response (± 3 dB) shall be 60 Hz - 15 kHz
- Power handling (IEC268-5, passive) shall be 150 W RMS @ 34.6 V (CL108) / 100 W RMS (CL108T)
- Nominal dispersion shall be 90° x 70° (axis dependent on horn orientation)
- Maximum SPL (1 m, passive) shall be 113 dB continuous and 119 dB peak (CL108)
- Maximum SPL (1 m, passive) shall be 111 dB continuous and 117 dB peak (CL108T)

Dimensions and weight: The loudspeaker system shall have the following characteristics:

- Height shall be 19.3" / 490 mm
- Width shall be 10.2" / 260 mm
- Depth shall be 11.3" / 288 mm
- Net Weight for CL108 shall be no more than 21.8 lbs / 9.9 kg
- Net Weight for CL108T shall be no more than 24.6 lbs / 11.2 kg


Model: The loudspeaker shall be the BEHRINGER EUROCOM CL108/CL108-WH/CL108T/CL108T-WH.




CL108/CL108T

Ultra-Compact 150-Watt, 2-Way, 8 Ω Loudspeaker System and 70.7 V / 100 V Loudspeaker System


Beamwidth VS. Frequency

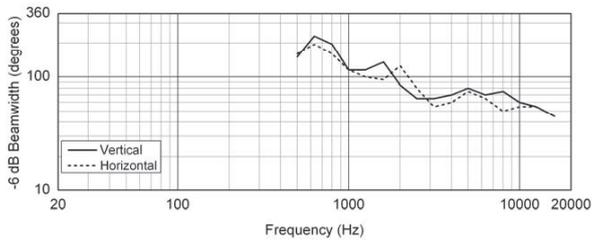


Vertical Up Off-Axis Frequency Response

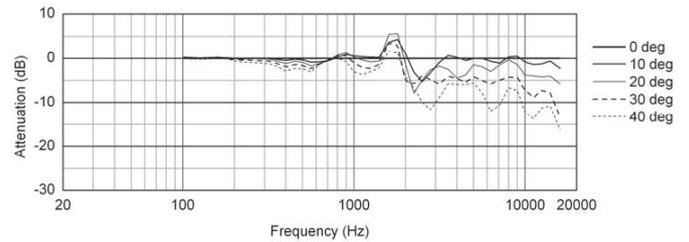


Horizontal Off-Axis Frequency Response

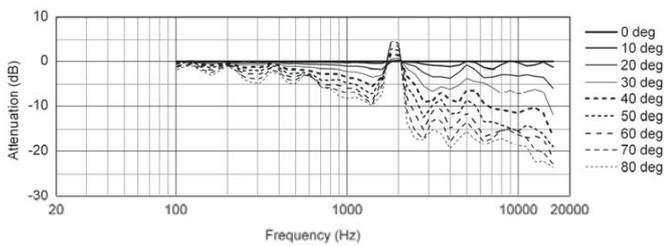


Vertical Down Off-Axis Frequency Response

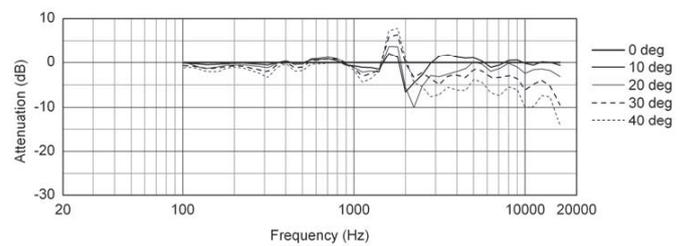


Frequency Response, 1 W @ 1 M

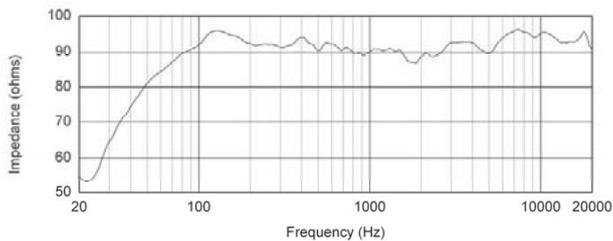

Impedance VS. Frequency

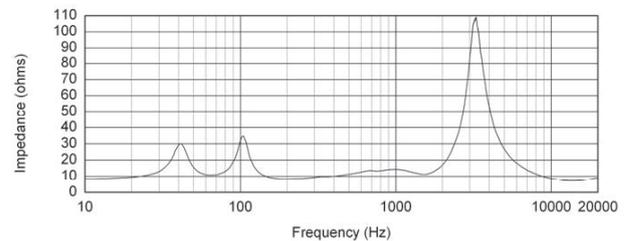


Directivity Index, Q

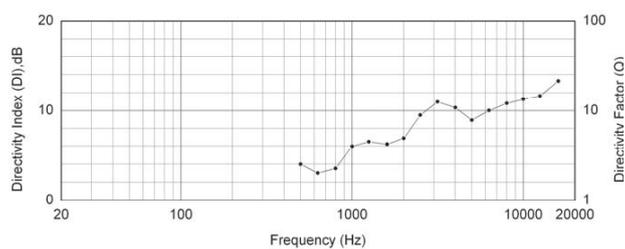

CL108/CL108T

Ultra-Compact 150-Watt, 2-Way, 8 Ω Loudspeaker System and 70.7 V / 100 V Loudspeaker System


Horizontal 1/3 Octave Polars

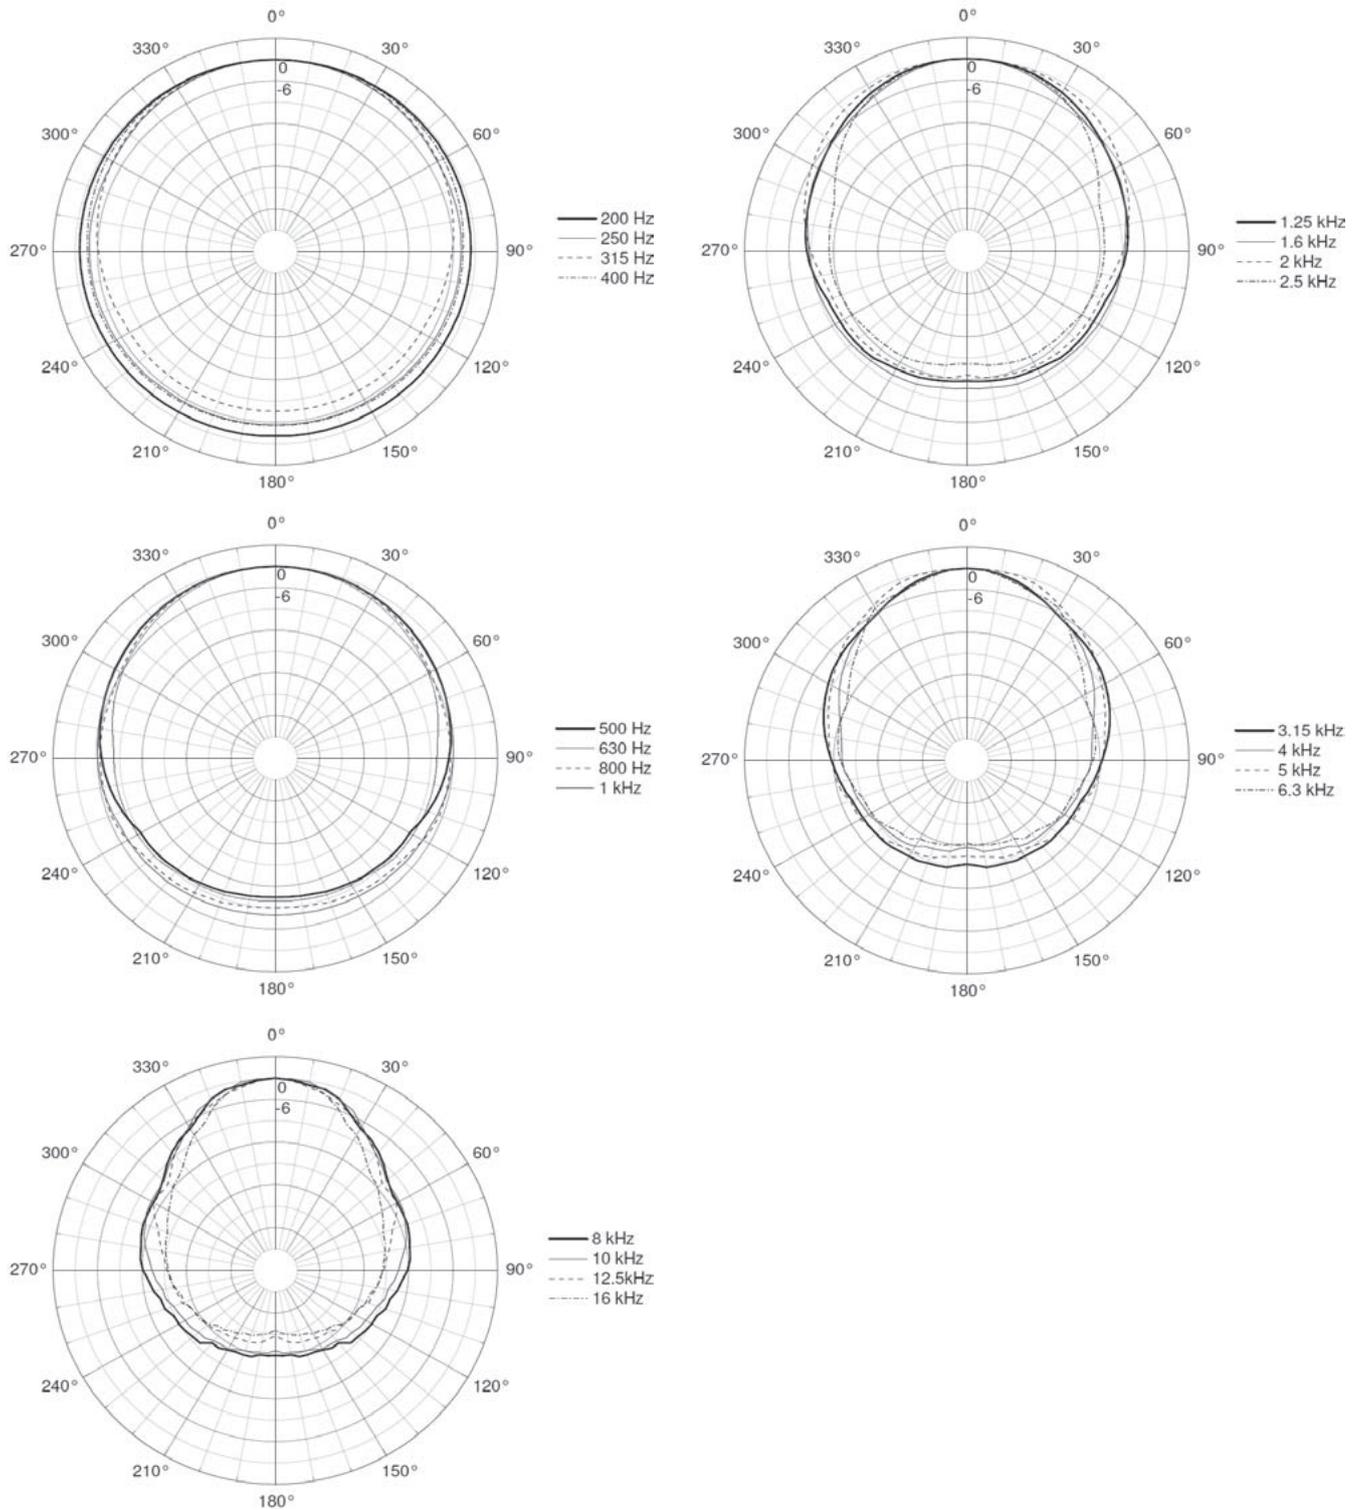

CL108/CL108T

Ultra-Compact 150-Watt, 2-Way, 8 Ω Loudspeaker System and 70.7 V / 100 V Loudspeaker System

Vertical 1/3 Octave Polars

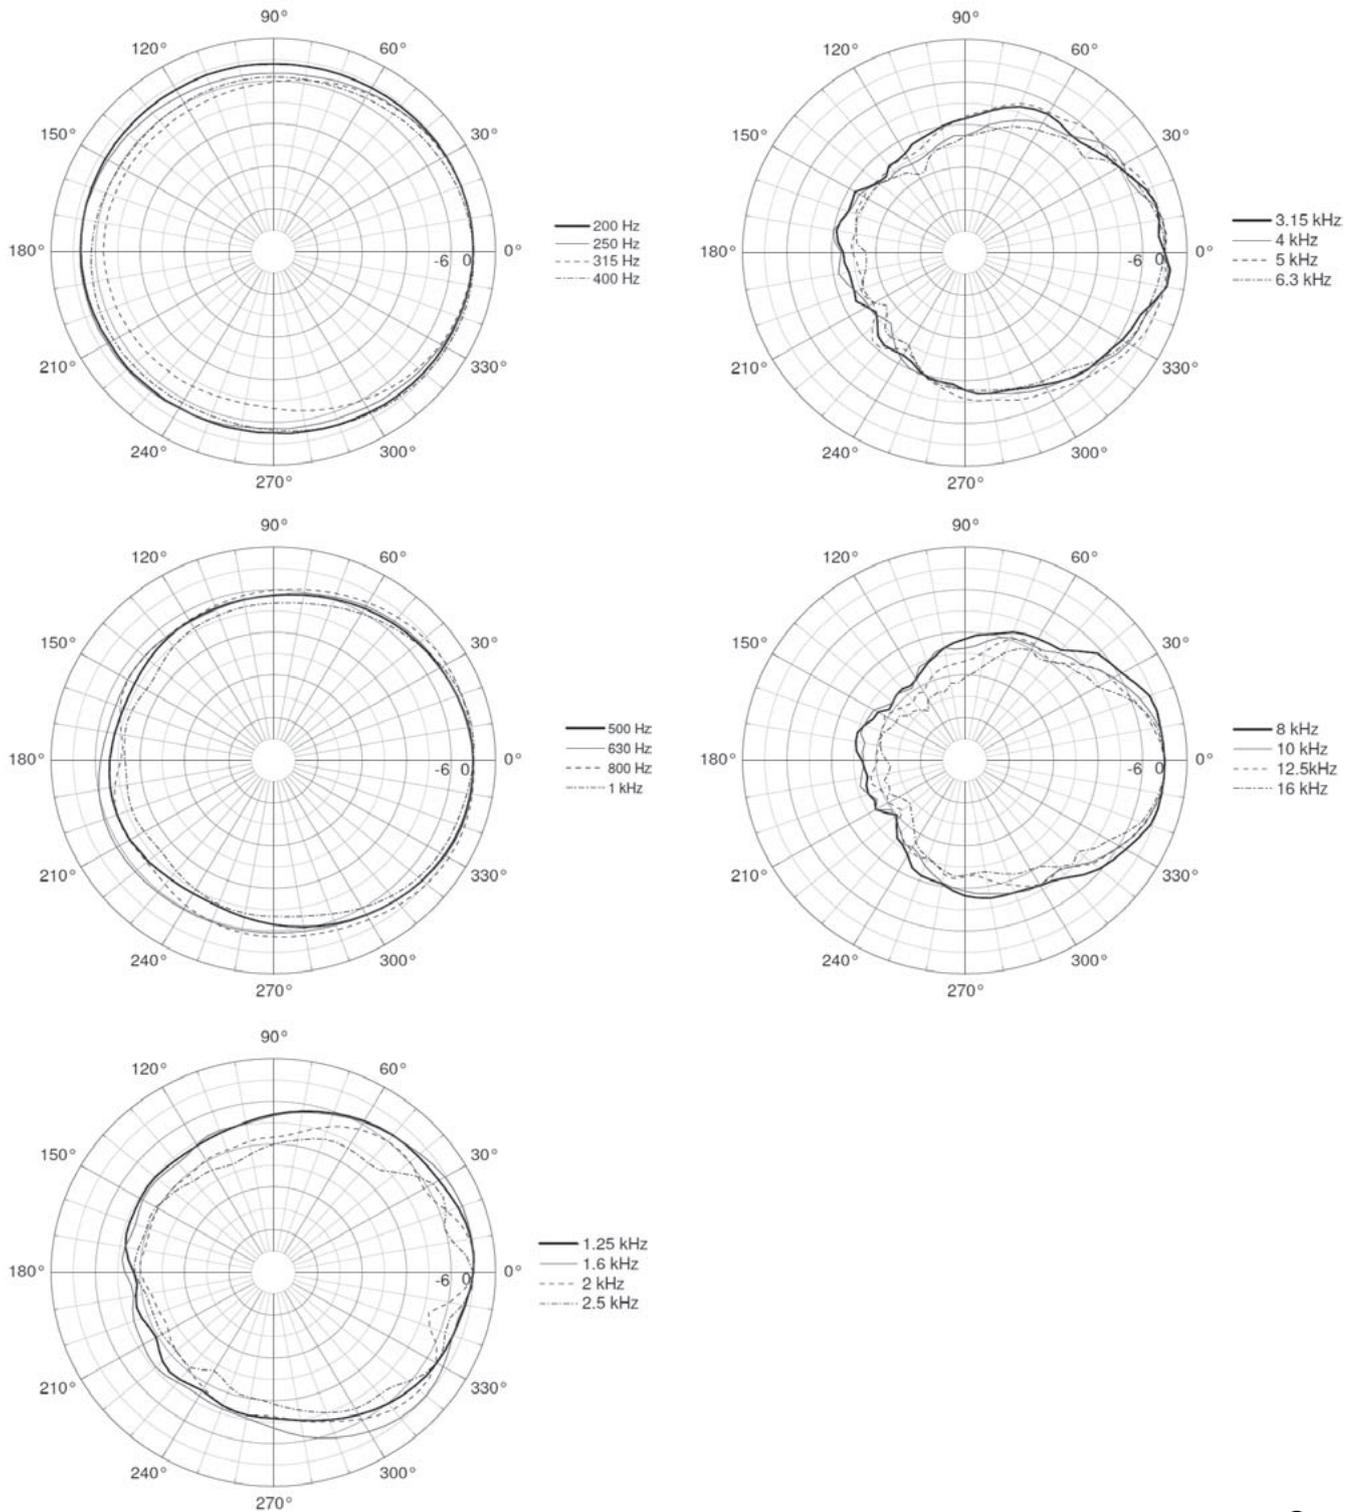

CL108/CL108T

Ultra-Compact 150-Watt, 2-Way, 8 Ω Loudspeaker System and 70.7 V / 100 V Loudspeaker System

Dimensional Drawings

