

antonbauer®

One World. One Smart Choice.™

TANDEM® 150

Charger / Power Supply System

Owner's Manual



TABLE OF CONTENTS

1	INTRODUCTION FEATURES WARNING SAFEGUARDS GROUNDING/EARTHING CHARGING CHARGE TIMES
2-3	APPLICATIONS THREE STAGE CHARGING METHODOLOGY LED INDICATIONS
4	OPERATION AS DC CAMERA SUPPLY FROM MAINS POWER LOSS OPTIONS: SOLAR CHARGING VEHICLE POWER OUTLET ADAPTER SPECIFICATIONS
5	WARRANTY

INTRODUCTION

The Tandem®150 is the smallest and lightest package available in a simultaneous charger and on-camera power supply. It incorporates all of the Logic Series® circuits that are employed in every Anton/Bauer charger. The fast charge feature makes it an ideal complement to a current Anton/Bauer battery system and given its small size is ideal for travel.

Like all Anton/Bauer chargers, everything is automatic. Once a battery is placed onto the charger, it will automatically go into one of the Three Stage Charging modes (see page 2)

FEATURES

- Simultaneous fast charger and AC power supply
- Power Supply Options: Solar Panel or Cigarette Lighter
- 150 Watt Power Supply @ 15 VDC
- Fast Charging.
- Logic Series technology.
- Wide Range Power Supply Input (100-240vac 50/60Hz).
- Seven (7) Independent Charge Termination Systems.
- Lightweight (9.6 oz.)
- PowerTap output for powering accessories

WARNING

The Tandem®150 is a 150 watt power supply. Exceeding 150 watts may cause the fuses and/or other protection devices to short leaving the unit unable to function. Please be sure the equipment to be powered draws less than 150 watts.

CHARGING AND CHARGE TIMES

As with all Anton/Bauer chargers, charging with Tandem® 150 is fully automatic. Mount any Logic Series® battery to the Tandem 150 and it will automatically determine and execute the appropriate charge routine.

	Charge Positions	LCD Display	Camera DC Power	Diagnostics Module (DDM)	Type of Charge	Nominal Charge Time (Hours)					
						DIONIC® 160	DIONIC® 90/HC	HyTRON® 140/100	ProPac®	HyTRON® 50	TrimPac®
QUAD 2702	4	STD	70W	STD	Sequential	3 ½	3	2 ½	1	2	1
TM4	4	N/A	N/A	N/A	Simultaneous	3 ½	3	2 ½	1	2	1
TWQ	4	N/A	N/A	N/A	Simultaneous	8 ½	5 ½	6 ½	3 ½	3	2
DUAL 2722	2	STD	70W	STD	Simultaneous	3 ½	3	2 ½	1	2	1
T2	2	N/A	70W	N/A	Simultaneous	3 ½	3	2 ½	1	2	1
Twin	2	N/A	N/A	N/A	Simultaneous	8 ½	5 ½	6 ½	3 ½	3	2
Tandem 70	1	N/A	70W	N/A	N/A	4 ½	3	2 ½	1	2	1
Tandem 150	1	N/A	150W	N/A	N/A	3 ½	2 ½	2	1	2	1

POWER GROUNDING/ EARTHING

IMPORTANT WARNING: THIS APPARATUS MUST BE EARTHED.

To ensure safe operation, the three pin plug supplied must be inserted only into a standard three-pin power point which is effectively grounded through the normal household wiring. Extension cords used with the equipment must be three-conductor and be correctly wired to provide connection to earth ground. Improperly wired extension cords are a dangerous electrical hazard.

The fact that the equipment operates satisfactorily does not imply that the power point is properly grounded and that the installation is completely safe. If any doubt exists about the correct grounding of the power point, consult a qualified electrician.

IMPORTANT: The wires in this mains lead are colored in accordance with the following code:

Green and Yellow	Earth
Blue	Neutral
Brown	Live

SAFEGAURDS

Power Sources: This unit power supply is designed to operate at mains voltages from 100 to 240vac, 50/60 Hz.

Risk of Electrical Shock: Refer servicing to qualified service personnel.

TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE.

APPLICATIONS

The Tandem®150 will charge any Anton/Bauer Logic Series® Gold Mount® battery including model: ProPac®, TrimPac®, Digital ProPac®, Digital TrimPac®, HyTRON™, and DIONIC® series.

NOTE: Anton/Bauer always recommends that each battery has its own charge position. A battery can remain on an Anton/Bauer charger indefinitely.

The Tandem®150 incorporates the exclusive InterActive communication between battery and charger, which allows the charger to identify any Anton/Bauer battery attached and determine the precise charge routine for that battery under the prevailing conditions.

NOTE: Due to the specialized communications between the charger and the battery, batteries without the Logic Series construction and communication capability (manufactured by Anton/Bauer before 1989 as well as so-called “rebuilt”) can not be charged with this charger. The InterActive® communication of Logic Series® batteries is the key which allows the Tandem® 50 to safely identify and address new style and chemistry batteries as they are developed. Moreover, this communication ensures that batteries contain the quality cells, workmanship and safety of genuine Anton/Bauer products. If a non-Logic Series® battery is placed on the charger, the red and green LED indicators will flash alternately. This indication means that the battery cannot communicate its identity to the Tandem®150 and is not charging. After 30 seconds of flashing green and red LED’s, the red LED will remain on, indicating a HOLD state.

WARNING: USE OF THIS CHARGER WITH ANY BATTERY NOT MANUFACTURED BY ANTON/BAUER MAY RESULT IN BATTERY DAMAGE AND CAUSE RISK OF FIRE OR PERSONAL INJURY.

3-STAGE CHARGING METHOD

In general, the Tandem®150 will deliver a **three stage charge routine** to each battery.

1. **STAGE ONE** will deliver a high rate charge matched to the capabilities of the battery. During this stage, seven separate cutoff methods are in operation, simultaneously, ensuring the fastest, safest charge for that battery.

TCO - Temperature cutoff which stops the Stage One charge precisely when a temperature indicative of full charge is reached;

Dt/dT - A microprocessor based algorithm which measures a rise in temperature over a specific time, very accurately indicating full charge. This method is also the recommended method for charging Ni-MH technology;

ΔV - A method to determine the end of Stage One charging by identifying a characteristic “reverse slope” of a Ni-Cd cell. Since this characteristic can be disguised by the age, temperature and the number of the cells in a battery, it can never be employed alone;

CCO - This method requires the identification of the particular battery size (capacity) and chemistry, an exclusive Anton/Bauer Logic® Series feature. The charger determines the maximum charge time for the particular battery and uses this information to ensure that overcharge conditions are avoided;

FUL - This determination is made when a fully charged DIGITAL battery is returned to a charger within specified parameters of time, temperature, and battery voltage. The DIGITAL battery communicates its fully charged condition and the charger confirms the parameters and immediately indicates a fully charged condition, without additional verification;

TEMPERATURE COMPENSATED VCO – For HyTRON™ series of batteries. Optimizes VCO cutoff to operate only within certain temperature parameters;

I-Min – For DIONIC® batteries, a seventh cutoff method is employed. The battery is charged to specific voltage and I-Min current until full charge is reached. I-Min is the “minimum current” flow required for proper cutoff.

2. **STAGE TWO** charging is a BALANCING or “equalize” mode which calculates each battery pack type to offset any imbalance of the battery’s cells, created by unequal self discharge or any capacity mismatch of the individual cells in the pack. This stage can vary in duration from zero to as much as 16 hours, depending on the condition of the battery. A battery will typically leave Stage Two in 2-4 hours under average operating conditions. **NOTE: This stage does not pertain to the DIONIC® series of batteries.**

3-STAGE CHARGING METHOD

- STAGE THREE** charging is the Anton/Bauer exclusive LifeSaver® maintenance mode. This patented pulse routine keeps batteries fully charged, free from self-discharge - indefinitely -without damaging heat associated with a so-called “trickle charge”.



NOTE: Anton/Bauer strongly recommends that batteries are kept on a charger until ready for use. The Lifesaver® mode will keep them 100% charged and ready for use.

LED INDICATIONS

The Tandem® 150 has three LEDs: one red (charger) and two green (ready and status). The status green LED indicates three states; 1) solid green LED indicates Tandem® 150 is operating as a charger or a simultaneous charger and power supply. 2) Flashing status green LED indicates Tandem is operating solely as a power supply. 3) No green LED indicates power has been removed from Tandem 150.

The red and green LED’s will indicate the charging status of the battery. The following table identifies all of the LED indications and their meaning:

LED INDICATION	MEANING
Alternating Red & Green	Indicates that the Tandem® 150 is evaluating the battery and/or communicating with a DIGITAL battery, loading battery parameters and determining the appropriate charge routine. A low voltage (<11V) battery will cause this indication to continue until the battery is “rejuvenated” to a safe charging voltage. NOTE: This indication will continue if a non-Anton/Bauer battery is mounted on the charger. These batteries cannot identify themselves to the Tandem 150 and will not be charged.
Steady Red	Indicates that the battery is being held by the Tandem to stabilize an out-of-range temperature condition.
Flashing Red	Indicates that the battery is currently under Stage One charge
Flashing Green (slow rate)	Indicates that the battery is currently under Stage Two charge.
Flashing Green (fast rate)	Indicates a fully charged DIGITAL battery is placed on the charger and a FULL cutoff condition cannot be met. The charger is VERIFYING that the battery is in a full charge condition.
Steady Green	Indicates that the battery is READY and in Stage Three Lifesaver mode.

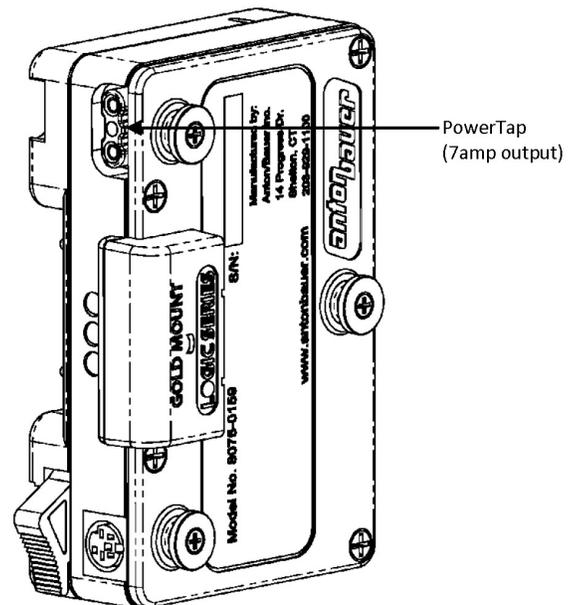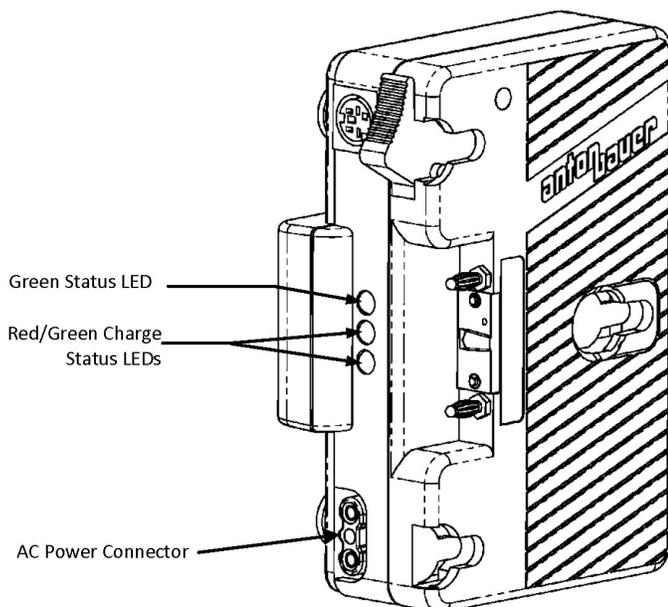

OPERATION AS DC CAMERA SUPPLY FROM MAINS

The Tandem® 150 will automatically operate as a DC power supply once the camera, or other device is turned on. There are no switches, it is fully automatic. The single green status LED will flash indicating that the unit is operating as a power supply.

If the camera load remains under 75 watts, the Tandem® 150 will simultaneously charge a battery and act as a power supply. If the camera load exceeds 75 watts, the battery will stop charging and the unit will only operate as a power supply.

When mounted on a camera, if AC power is removed from the Tandem® 150, and a charged battery is mounted on the unit, power from the battery will be routed to the camera. When power is restored, the battery will be re-evaluated for a proper charge routine.

NOTE: When removing the Tandem® 150 from AC Mains, be sure to also remove the battery from the unit.

TIP: When camera is used on stakeout, (such as indoors on a tripod) keeping a battery mounted to the Tandem® 150 allows instant switching to handheld situations. Simply remove the power cord for an automatic switch to battery power.

WARNING: DO NOT OPERATE THIS UNIT IN THE RAIN.

POWER LOSS

If AC power is lost during operation and there is a charged battery attached to the Tandem® 150, then a seamless transition to battery power will occur.

OPTIONS

The Tandem® 150 is made up of two pieces: the QR-TM, which is the Gold Mount® module, and the PSU-150, which is the power supply. When not using the PSU-150, two other options are available as power sources for the QR-TM:

SOLAR PANEL:

When using the QR-TM with the SOLAR panel:

- Plug the cable from the SOLAR Panel into the QR-TM.
- Attach the battery to the QR-TM.
- Unit functions only as a battery charger in this configuration.
- Charge times as fast as 3 hours with optimal sunlight. (Charging depends on available sunlight.)
- Charge LED indications are normal; see page 3 of this manual.

WARNING: SOLAR Panel will be hot to the touch when using in direct sunlight. It is recommended that the SOLAR Panel be left to cool for an extended period of time before trying to pack it up.

VEHICLE POWER OUTLET ADAPTOR (CA-TMCL)

An optional Vehicle Power Outlet Adaptor, CA-TMCL, cable can be used with the QR-TM.

When using the QR-TM with the CA-TMCL:

- Plug the cable from the CA-TMCL into the QR-TM.
- Plug the cigarette lighter plug of the CA-TMCL into the vehicle's power outlet.
- Attach the battery to the QR-TM.
- Unit will function as a battery charger and power supply in this configuration.
- Charge LED indications are normal, see page 3 of this manual.

SPECIFICATIONS

Size	3.85 inches (97.8mm) x 1.7 inches (43.2mm) x 4.7 inches (119.4mm)
Weight	.60 lbs (0.27 kg)
Power Supply Input Voltage	100-240vac 50/60 Hz
Output Voltage	15 VDC Nominal
Fuse Rating Camera Output	10 Amp Resettable
Fuse Rating PowerTap Output	7 Amp Replaceable
Maximum Power	150 watts at 15 volts

FUSE/TYPE REPLACEMENT

The Tandem® 150 fuse devices are not user serviceable parts, and should only be replaced by a qualified service technician.

LIMITED WARRANTY

This three (3) year limited warranty for the product specified in this document ("Product") is given by Anton/Bauer, Inc. ("Anton/Bauer"), 14 Progress Drive, Shelton, Connecticut 06484. If you (the purchaser of the Product from Anton/Bauer, or the person for whom the Product was purchased, if it was a gift) have any questions regarding Product applications, Product specification, or to obtain warranty service on this or any Anton/Bauer product, contact the company at the address above.

THIS PRODUCT MUST BE REGISTERED WITH ANTON/BAUER WITHIN 30 DAYS OF PURCHASE TO ASSURE WARRANTY COVERAGE. TO REGISTER YOU MAY EITHER:

- (1) MAIL WARRANTY REGISTRATION CARD or
- (2) REGISTER ON LINE AT www.antonbauer.com

The liability of Anton/Bauer hereunder is expressly limited to a claim for repair or replacement of the Product or as otherwise stated herein at Anton/Bauer's sole discretion. Notice of any claim under this warranty shall be delivered to Anton/Bauer during the period of the warranty and the Product shall be returned with its packaging promptly, at your expense, to an Anton/Bauer Customer Support Center or to the address above. Upon receipt of the Product and a record of your compliance with the conditions of this warranty, Anton/Bauer will repair or replace the Product and return it to you, or issue a credit, as applicable. You are responsible for all shipping and handling charges to and from authorized facility.

THIS WARRANTY DOES NOT APPLY TO AND IS VOID IN THE CASE OF DEFECTS OR DAMAGE RESULTING FROM ACCIDENTS, DISASTER, NEGLIGENCE, MISUSE, IMPROPER INSTALLATION, IMPROPER OR UNAUTHORIZED SERVICE OR MAINTENANCE, UNAUTHORIZED REPLACEMENT PARTS OR ATTACHMENTS; OR DYSFUNCTION OR MALFUNCTION OF, OR CAUSED BY, ANY OTHER PRODUCT OR DEVICE. **Misuse includes any use of the Product in other than its intended application, including the use of this Product with any charging device or accessory not manufactured by and/or specified by Anton/Bauer. This warranty does not cover, and Anton/Bauer assumes no responsibility for, any equipment or devices used in conjunction with the Product.**

ANTON/BAUER DISCLAIMS ANY LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES FOR BREACH OF ANY WRITTEN OR IMPLIED WARRANTY OF THE PRODUCT. UNDER NO CIRCUMSTANCES WILL ANTON/BAUER BE RESPONSIBLE FOR ANY SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

This Warranty is to be construed and enforced in accordance with the law of the State of Connecticut, including the provisions of the Uniform Commercial Code as adopted and from time to time amended in the State of Connecticut, and not the Convention for the International Sale of Goods. This choice of Connecticut law is exclusive of any Connecticut law that would require reliance on any law foreign to Connecticut. Should any action of law or in equity be brought by any person under this Warranty, such action shall be brought only in the United States

District Court for the District of Connecticut, or in any Superior Court in Fairfield County, Connecticut, USA. Some states do not allow limitations on how long a warranty lasts, so the time period limitation herein may not apply to you. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights and you may have other legal rights which may vary from state to state.

Use of unauthorized equipment in conjunction with Anton/Bauer products constitutes misuse under our warranties and may limit or void those warranties. Anton/Bauer does not authorize, condone, recommend, or otherwise assume any liability or responsibility resulting from the use of any battery, charger or accessory made by Anton/Bauer manufacture with any battery, charger or accessory not manufactured, produced or sold by Anton/Bauer. Anton/Bauer only authorizes the use of original Anton/Bauer product with this product. Use only original Anton/Bauer equipment with this product.



The following are trademarks of Anton/Bauer, Inc.:

Anton/Bauer, Anton/Bauer logo and parallelogram design, Aspekt, Automatique, DataTap, DIONIC, Elipz, Egripz, Elightz, Essentialz, Gold Mount, HubZ, HyTRON, Impac, Interactive and design, LifeSaver, Logic Series, Logic Series Logo, Maxx man logo design, Nexus, PowerStrap, Proformer, Probe, ProPac, RealTime, Satelight, Snap-On, Stasis, Stasis Flex, Tandem, TrimPac, Ultrakit, Ultralight, "One World. One Smart Choice", "The power behind the best cameras capturing the best images in the world.", "The quality standard of the video industry", "The worldwide standard", and "There should always be choices. It makes it easier to recognize the best."

Lexan is a registered trademark of G.E. Company Corp.

Cordura is a registered trademark of E.I. duPont de Nemours

Anton/Bauer, Inc.

World Headquarters
14 Progress Drive, Shelton, CT U.S.A.
Tel (203) 929-1100 or (800) 541-1667
Fax (203) 929-9935
support@antonbauer.com

Anton/Bauer Europe, B.V.

Eurode Business Center, Eurode - Park 1-2
6461KB Kerkrade, The Netherlands
Tel (+31) 45 5639220
Fax (+31) 45 5639222
eurosupport@antonbauer.com

Anton/Bauer, Inc. - Singapore Office

6 New Industrial Road, # 02-02 Hoe
Huat Ind. Bld., Singapore 536199
Tel (+65) 62975784
Fax (+65) 62825235
asia@antonbauer.com

www.antonbauer.com

