


# InstaSnake PA200™ Series

# Audio Products - Adapters

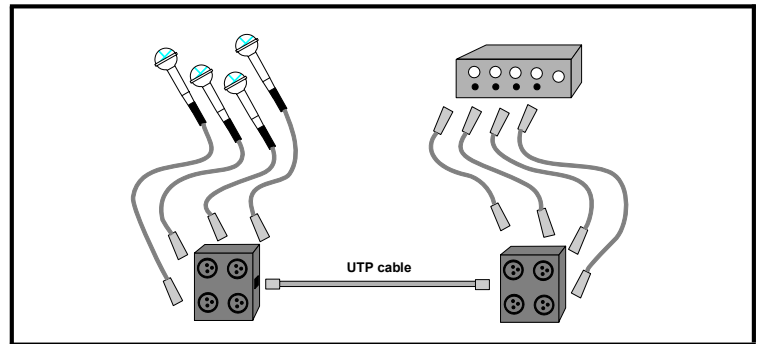

Features/Advantages	Description	Applications
<ul style="list-style-type: none"> <li>Easily transported</li> <li>Low cost</li> <li>No ground loops when unshielded Cat5 cable is used on PA202</li> <li>4 channels analog audio</li> <li>8 channels digital audio</li> <li>May be used for analog or digital audio – mic or Line Level</li> <li>Supports 48V phantom power when Shielded Cat5 cable is used</li> <li>Rugged, ‘road-ready’ construction</li> <li>RoHS compliant</li> <li>USA Made - 100% tested</li> </ul>	<p>The <b>ETS InstaSnake™ Series (PA200)</b> is a compact, lightweight, versatile passive group of components allowing you to run audio signals over a single run of Cat 5, 5e, 6 or 6a data cables. With a roll of cable, these compact units are easily transported and/or stored solving dozens of live and/or recording sound problems.</p> <p>The <b>InstaSnake</b> is a passive unit, so you do not need power. The <b>InstaSnake</b> accepts “mic” level or line level analog or digital audio and supports phantom power when using shielded Cat 5 or 6 cables. The basic units are a pair of passive units with bi-directional capability which can be input directly into analog or digital consoles.</p> <p>Designed to the highest professional standards the <b>InstaSnake</b> has a wide, flat frequency response, low THD and residual noise. The <b>InstaSnake</b> has been factory tested to 1900 feet over Cat 5 using balanced line low impedance dynamic microphones. Phantom power has been tested to 850 feet over <u>shielded cable</u>. (<u>Phantom Power – Shielded Cat 5 or 6 cables are required to pass phantom power with the exception of the PA205, which does not require shielded Cat5 or 6 UTP.</u>)</p> <p>The <b>InstaSnake Splitter (PA206)</b> splits the signals at the receive end and sends them to a recorder or mixer. [“analog only” It cannot be used for digital]. A second Cat 5 cable connects the second receiving unit – it handles phantom power. 4 additional standard mic cables are required.</p> <p>The <b>InstaSnake</b> is available in 2 basic send/receive units which can be mounted in a 2 RU 19” rack, plus units with pigtailed, and wall plate versions. (4) 1.5 ft. pigtailed let you access any mixer without the need for an additional 4 microphone cables.</p> <p><b>Notes:</b> Neutrik cable carrier P/N NE8MC6-MO does not mate with the InstaSnake PA200 Series. All other Neutrik cable carriers fit.  <b>The PA202 group when used with shielded Cat5 or better UTP is Clear Com products compatible.</b></p>	<ul style="list-style-type: none"> <li>Live Sound</li> <li>Recording Studios</li> <li>TV &amp; Radio Broadcasts</li> <li>Production/Editing</li> <li>Post-Production Houses</li> <li>Foley/ADR Studios</li> <li>Hotels</li> <li>Convention Centers</li> <li>Churches</li> <li>Cruise Ships</li> <li>Auditoriums/Stadiums</li> <li>Home Studios</li> <li>Remote &amp; News Trucks</li> <li>Field Recording</li> </ul>

Specifications		Product Ordering Information	
Crosstalk @ 20KHz	-109dB between Ch1 and Ch2 -102dB between Ch1 and Ch3 -106dB between Ch1 and Ch4 -106dB between Ch2 and Ch3 -106dB between Ch2 and Ch4  -109dB between Ch3 and Ch4	PA202F PA202M PA202P PA202FP PA203F PA203M PA203P PA203FP PA204F PA204M PA204P PA204FP PA206 Note:	(4) FXLR to RJ45 jack, all pins (4) MXLR to RJ45 jack, all pins (4) MXLR 1.50' pigtail to RJ45 jack, all pins (4) FXLR 1.50' pigtail to RJ45 jack, all pins (3) FXLR + (1) MXLR to RJ45 jack, all pins (3) MXLR + (1) FXLR to RJ45 jack, all pins (3) MXLR + (1) FXLR 1.50' pigtail to RJ45 jack, all pins (3) FXLR + (1) MXLR 1.50' pigtail to RJ45 jack, all pins (2) FXLR + (2) MXLR to RJ45 jack, all pins (2) MXLR + (2) FXLR to RJ45 jack, all pins (2) MXLR + (2) FXLR 1.50' pigtail to RJ45, all pins (2) FXLR+ (2) MXLR 1.50' pigtail to RJ45 jack, all pins Splitter – (4) MXLR to (2) RJ45 jacks, all pins Accessories are available - couplers, cables and 2u, 19” rack mount panels & blank plates (PA207)
Distance	UTP – 1900 ft FTP or STP - 850 ft – phantom power only		
Connectors	Female or Male XLR to Ethercon RJ45 jack		
Dimensions L x W x H	69mm x 62mm (+pigtail) x 36mm 107mm x 70mm x 45mm – without pigtail		

© Copyright 2005-2018 Energy Transformation Systems, Inc. FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5™, FatCat5 System™, Chameleon Color Coding System™, Balanced Star™, Balanced Line™, Monoline™ and Precision Wave™, InstaSnake™, CineSnake™ are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners.

Revised 4/24/18



**Energy Transformation Systems, Inc.**

43353 B Osgood Rd. Fremont, CA 94539  
 800-752-8208 510-656-2012 Fax 510-656-2026