

## MRT-327 User Station




The MRT-327 is a 2-channel intercom station for use in RTS-TW intercom systems. It may be used as a headset station or as a speaker station (with an optional MCS-325 modular speaker). The MRT-327 may be installed in optional console or rack mount configurations.

## Features

- The MRT-327 can send and receive 20kHz call signals.
- The MIC on/off switch can be used as a momentary push-to-talk switch or as a latching on/off switch.
- The MRT-327 can receive 24kHz talk-off (mic kill) signals for deactivation of the MRT-327 microphone from a remote location.
- The microphone pre-amplifier circuit contains a limiter which helps to equalize output for different voice levels.
- The standard MRT-327 accepts a dynamic-mic headset used in conjunction with an external speaker located on the rear panel. It also has an optional jack for an MCP-90-xx gooseneck panel microphone.
- The MRT-327 receives operating power from the intercom line. It may be internally modified for local powering from a separate DC power supply or batteries.

## Line Drawings

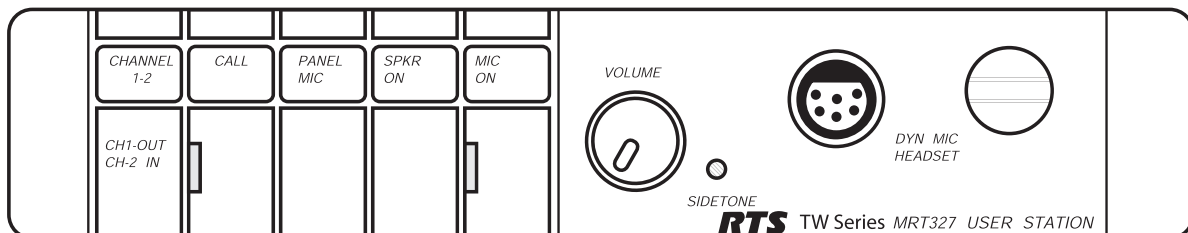

## Specifications

### General

Input DC Voltage:

Mode: 18 to 35 volts DC

Local Power: 15 to 35 volts DC (12 to 15 volts DC, reduced performance)

DC Current Drawn from TW Line

Quiescent: 45mA ±10%

Operating, 25Ω phones: 75mA ±10%

Operating, 25Ω phones + call light:

90mA ±10%

Operating, 8Ω speaker:

240mA ±10%

Operating, 8Ω speaker + call light:

300mA ±10%

DC Current Drawn from TW Line

### Notes:

Operating current is measured with output level at 10dB below clipping.

Local power option draws no current from TW line.

Impedance Across Line:

10kΩ, minimum (designed for use with 200Ω "TW" intercom lines)

Environmental Temperature:

Operating: 0°C to 50°C

(32°F to 122°F)

Storage: 40°C to 85°C

(104°F to 185°F)

Humidity:

Operating and Storage: 5% to 95%, non-condensing

Noise Contribution:

(Ch 2): <-60dBp

(Ch 1): <-80dBp

### Microphone Preamplifier

Input Impedance:

470Ω ±5% (dynamic mic)

Source Impedance:

200Ω, (nom.)

Maximum Input Level:

150 millivolts

Frequency Response

(-54dB input): 100Hz to 8kHz ±3dB

Limiter Range:

30dB

Carbon Mic Excitation Current:

10mA, (nom.)

### Microphone Current Source

Output:

3.3 mA into 200Ω = ±1 volt peak, (nom.)

### Speaker Amplifier

Maximum Voltage Gain:

30dB

Frequency Response:

100Hz to 8kHz ±4dB

Output Power:

1.5 watts into 8Ω (nom.)

Speaker DIM (speaker muting during mic activation) adjustable,

-4 to -30dB (Factory set to -6dB)

### Headphone Amplifier

Voltage Gain:

34dB

Output Voltage:

8 volts peak-to-peak into 25Ω (nom.)

Output power:

½ watt peak into 25Ω

Frequency Response:

150Hz to 10kHz ±3dB

Headphone Impedance Range:

25 to 600Ω (600 to 2000Ω with reduced levels)

Sidetone Adjustment Range:

-20dB to full on

### Call Light

Signalling Frequency:

20kHz ±100Hz

### Talk-Off

Frequency:

24kHz ±100Hz

### Connectors

Dynamic Microphone Headset:

XLR type 6 pin female

Panel Microphone:

¼-inch standard phone jack, 3-circuit

Line Input:

One (1) XLR type 3-pin female and one (1) XLR type 3-pin male, wired in parallel

### Mechanical

Dimensions:

1.71" (44mm) H x 8.2" (208mm) W x 9.0" (228mm) D

Weight:

2.75lb (1.25kg)

Construction/Finish:

Aluminum case, thermoplastic front panel, light gray finish

## Order Information

MRT327 A4F • MRT-327 A4F • 2 user programmable modular user station

MRT327 A5F • MRT-327 A5F • 2 user programmable modular user station

The specification information is preliminary and is subject to change without notification. Brand names mentioned are the property of their respective companies.

Bosch Security Systems, Inc. | 12000 Portland Avenue South | Burnsville, Minnesota 55337  
 Telephone: 877-863-4169 | Fax: (800) 323-0498  
 Form Number: F01U259392 Rev 04  
 Date: February 2013

**RTS**  
 www.rtsintercoms.com