

# Inday

Multimedia Products


1818 NE 140<sup>th</sup>  
Portland, OR 97230  
503-255-1451  
503-251-0586 fax  
support@inday.com  
www.inday.com

## Toslink Distribution Amplifier

Model: TLDA1

- ★ Toslink Splitter: 1 IN to 4 OUT
- ★ Optically isolated inputs and outputs.
- ★ Not a passive splitter. Will not degrade the source signal
- ★ Shutters on inputs and outputs. No Toslink Plugs
- ★ Each output has its own Fiber Optic Transmitter

The TLDA1 is a fully active device. What this means is the Input is converted from optical back into electrical and then sent to 4 independant Toslink Transmitters. This ensures that ONE bad fiber cable will not destroy your signal.

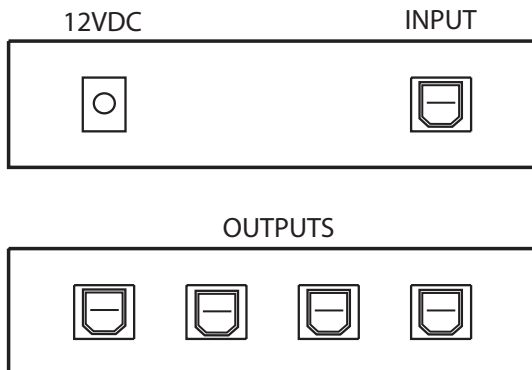

### Specifications:

#### INPUT:

1 Toslink w/Shutter  
Accepts any standard SPDIF format

#### ALL OUTPUTS:

4 Toslink w/Shutters

#### POWER:

12VDC-Unregulated Nominal  
@ 60ma Max.  
Wall Transformer supplied

#### DIMENSION:

4"W x 2.5"L x 1"H

#### TEMPERATURE

0 TO 50 DEGREES C

#### HUMIDITY

0 TO 90% (non-condensing)

### Typical Application

