

75Ω Standard Size Video Jacks

Applications

- HD-SDI
- Analog Baseband Video
- HDTV Upgrades (DTV)
- Satellite Headends
- CATV Broadband
- SMPTE 276M/AES3 Digital Audio

Features


1. 75 Ohm rating
2. Lifetime Warranty*
3. Rotary switch technology

Benefits

1. Low return loss (20dB or greater until 2.4GHz)
2. Guaranteed Canare quality
3. Longer-lasting, more reliable connections




DVJA-W Normal through, 2.4GHz
DVJA-S Straight through, 2.0GHz

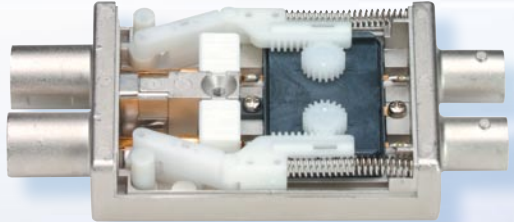

DVJA-W Normal Through

Signal routes between top and bottom BNC without the use of external looping plugs. Inserting a Canare VPC Video Patch Cord into either front WE port automatically terminates signal path into a 75Ω load. Our most popular VJA model.



Standard Video Patch Plugs

Features

- WE .09" compatible
- 75 Ohm
- Durable Canare quality
- For use with DVJA jacks



VWP-C4A

VWP-C4A

Video patch plug to crimp connection
 Return loss of 15dB or greater at DC-2.0GHz
 Gold-plated center contact pin
 Fits Canare LV-61S cable
 Matching boot - CB04
 Crimp die - TCD-451CA

BCJ-VWP

Adaptor - Video patch plug to BNC receptacle
 Return loss 15dB or greater at DC-2.0GHz



BCJ-VWP

LP-1

Looping plug for DVJA-S jacks. Return loss 20dB or great at 1.5GHz. Gold-plated center contacts. Available in BLK, BLU, BRN, GRY, GRN, ORN, PPL, RED, WHT, YLW




LP-1

VJ-DC

Dust cap for DVJA port, available in yellow

DVJA-S Straight Through

Two independent single jacks in a dual housing. Inserting a Canare VPC Video Patch Cord into either front WE port breaks the 75Ω termination for straight signal pass through. Very useful for bringing up auxiliary equipment to a designated central patchbay location.



LIMITED LIFETIME WARRANTY STATEMENT

Canare warrants that the MDVJ-STW, MDVJ-STS, DVJA-W and DVJA-S will be free from defects in materials and workmanship for as long as these products remain in use. Canare will replace, or repair, at its option, products which are proven to be defective. This warranty does not apply to any products that have been subject to misuse, improper storage, or incorrect installation or servicing. At Canare's option, Canare may replace any defective product with the same or similar product. This warranty is void if the product Label has been tampered with or removed.

This warranty is in lieu of all other warranties, express or implied, including (but not limited to) any warranty of fitness for a particular purpose or warranty of merchantability. This warranty states the full extent of Canare's liability resulting from any breach, and in no event shall Canare be liable for indirect, consequential or special damages (including, but not limited to, lost profits) sustained by any party as a result of a breach of this warranty.



Standard Video Patch Cords

Features

- WE .09" compatible
- 75 Ohm, impedance matched for optimal performance
- Super flexible
- Utilizing Canare LV-61S cable
- Available in BLK, BLU, BRN, GRY, GRN, ORN, PPL, RED, WHT, YLW
- Matching color boots - CB04
- Custom lengths available (please call)

Standard Video Patch Cord	Length	Connectors
VPC001F	1 Foot	VWP-C4/VWP-C4
VPC002F	2 Feet	VWP-C4/VWP-C4
VPC003F	3 Feet	VWP-C4/VWP-C4
VPC004F	4 Feet	VWP-C4/VWP-C4
VPC005F	5 Feet	VWP-C4/VWP-C4
VPC006F	6 Feet	VWP-C4/VWP-C4