

UP/DOWN MASTER TIMER & ACCESSORIES (Con't)

DIGITAL TIMER DISPLAYS

ESE offers a wide variety of Timer "Remote" Displays. Display height ranges from .4" high to 4.0" high and the enclosures available include desk top, console mount, wall mount (camera mount) and rack mount. Larger displays as well as custom enclosures are available on a "Custom" basis. If "Video Insertion" of **ESE** Timer Code is required, please refer to the **ES-266U** on page 11.


The units described below are designed to decode and display SMPTE or **ESE** Serial "Timer" Code. The **ESE** Serial "Timer" Code may originate from any **ESE** Master Timer (LX-362U, ES-362U, LX-520U or ES-520U), an **ESE** Timer with the "**ESE**" option or an **ES-167C** (Parallel to Serial Converter) connected to an appropriate source of parallel BCD. These 4-digit Remote "Timer" Displays, when driven from a Master "Clock" (Real Time), may be used to display clock data (Hours & Minutes) instead of timer data.

Each **ESE** Digital Remote Display requires only a single pair of wires (or coax) between itself and the Master. And, all **ESE** Masters are capable of driving up to 100 Displays at 4000 feet (without buffering).

Note: If a Master "Clock" System is required, please refer to Page 9 and the "Master Clock Systems" brochure.

Features:

- Desk Top, Console, Wall (Camera) & Rack Mount Enclosures
- Perfect Synchronization With Master
- NTP Client option
- "Hands-Off" Operation
- Long-Life LED Displays
- Simple Installation

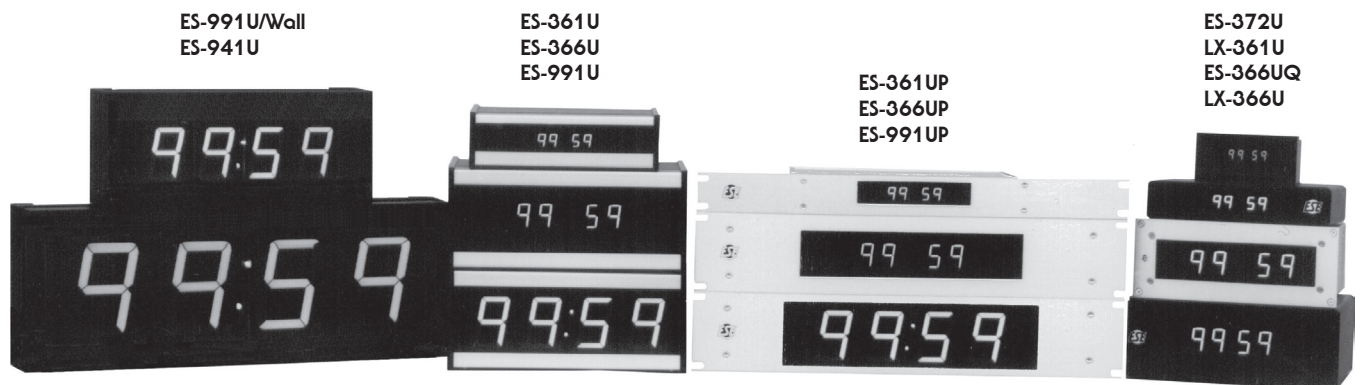

SPECIFICATIONS

	ES-372U	ES-361U	LX-361U	ES-366U	LX-366U	ES-991U	ES-941U
Power:	4 Watts	5 Watts	5 Watts	5 Watts	5 Watts	8 Watts	8 Watts
Line Cord:	2-wire, 6'	2-wire, 6'	3-wire, 6'	2-wire, 6'	3-wire, 6'	2-wire, 6'	2-wire, 6'
Electrical:	117 VAC, 50/60Hz	117 VAC, 50/60Hz	117 VAC, 50/60Hz	117 VAC, 50/60Hz	117 VAC, 50/60 Hz	117 VAC, 50/60 Hz	117 VAC, 50/60Hz
Input:	ESE or SMPTE	ESE or SMPTE	ESE or SMPTE	ESE or SMPTE	ESE or SMPTE	ESE or SMPTE	ESE or SMPTE
Connector:	BNC	BNC	BNC	BNC	BNC	BNC	Terminal Block
Enclosure:	Console Mount	Desk Top	Desk Top	Desk Top	Desk Top	Desk Top	Wall Mount
Mechanical (HxWxD):	2.2"x4.5"x4.5"	2.8"x8"x6"	1.7"x8"x6"	5.5"x10.4"x6.6"	3.5"x10"x6"	5.5"x10.4"x6.6"	7"x19"x3.5"
# of Digits:	Four (Min-Sec)	Four (Min-Sec)	Four (Min-Sec)	Four (Min-Sec)	Four (Min-Sec)	Four (Min-Sec)	Four (Min-Sec)
Display Height:	.4" Red	.56" Yellow	.56" Yellow	1" Yellow	1" Yellow	2.3" Yellow	4.0" Red
Viewing Distance:	10 feet	20 feet	20 feet	35 feet	35 Feet	70 Feet	120 feet
Options:	J, T*, V(12VDC), W, UL	Black, ESE , J, NTP-C, P(1¼"), P2, RS, Q, T*, TZ, W, UL	J, RS, T*, TZ, UL	Black, ESE , J, NTP-C, P(3½"), P2, RS, Q, T*, TZ, UL, W, Wall	J, RS, T*, TZ, UL	Black, J, NTP-C, P(3½"), Red, T*, TZ, UL, W, Wall	J, NTP-C, T*, TZ, W, UL

* Refer to Price List or consult Factory for proper Part Number if option "T" is required.

