


AV900 Series

Baseband Video/Stereo Audio Baluns

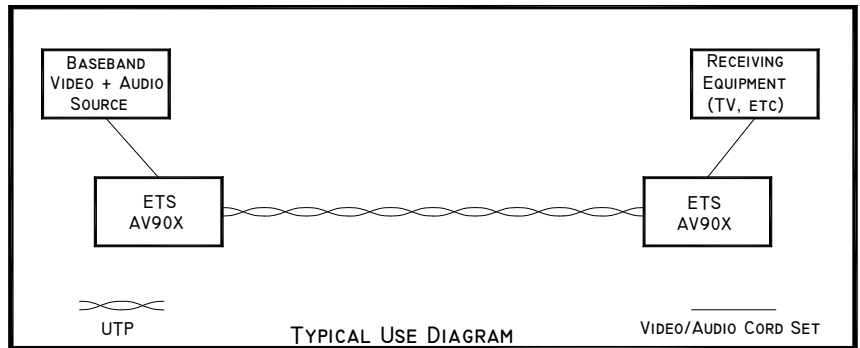

| Features/Advantages | Description | Applications |
|--|--|--|
| <ul style="list-style-type: none"> • 1 baseband video channel and 2 balanced audio channels on one run of UTP • Use for point to point replacement of coax and shielded cables • Rugged plastic cases • Made in USA • 100% tested | <p>The ETS AV900 and AV901 Baseband Video/Stereo Audio Baluns are utilized for point-to-point replacement of coaxial (video) and shielded (high impedance audio) cables with UTP wiring, Category 5 or better.</p> <p>The AV900 (with a FBNC video input plus dual RCA jacks for audio) and the AV901 (with 3 RCA jacks for all inputs) are designed for installations that have a need for separate audio channels. For example, some VCRs and Video Cameras have video plus stereo outputs available on three RCA jacks. The AV901 can run these signals using three of the four pairs in standard UTP cable.</p> <p>The AV905 and AV906, which allow you to send two channels each of baseband video and audio in any direction desired. This capability yields, for instance, a bi-directional video + mono audio link, or many other configurations.</p> | <ul style="list-style-type: none"> • Schools • Classrooms • Auditoriums • Home Theater • Security & Surveillance • Satellite TV Facilities • Personal Computers |

| Specifications | | Product Ordering Information | |
|----------------|--|------------------------------|--|
| Bandwidth | Flat to 60 MHz (video) / 10Hz to 20kHz (audio) | AV900 | VSB, (1) FBNC video pins 8,7 + (2) RCA jack Audio to RJ45 jack, pins 1,2 & 3,6 |
| Connectors | FBNC or RCA jack (video) / (2) RCA jack (audio) or screw terminals (audio) to RJ45 jack, Data Pass Through (audio) | AV900PT | VSB + Pass Through, (1) FBNC + (2) RCA jacks + (1) 2 position terminal to RJ45, all pairs used |
| Crosstalk | >50dB (video) | AV900S | VSB, (1) FBNC video pins 8,7 + Screw terminals Audio to RJ45 jack, pins 1,2 & 3,6 |
| Impedance | 600:600 (audio) | AV901 | VSB, (3) RCA jack, Video, pins 8,7 + (2) Audio to RJ45 jack, pins 1,2 & 3,6 |
| Isolation | 500 V (audio, per channel) | AV901PT | VSB + Pass Through, (3) RCA jacks + (1) 2 position terminal to RJ45, all pairs used |
| Distance | Audio – 1000 ft; Video – Color 1200 ft, B/W 2500 ft | AV905 | DVDA, (2) FBNC Video pins 1,2 * 7,8 + (2) RCA jack Audio to RJ45, pins 3,6 & 5,4 |
| Dimensions | 66mm x 66mm x 28mm | AV906 | DVDA, (2) RCA jack Video pins 1,2 & 7,8 + (2) RCA jack Audio to RJ45 jack, pins 3,6 & 5, 4 |
| Net Weight | 0.09 kg | | |

© Copyright 2004-2011 Energy Transformation Systems, Inc.
 FatCat5 System panels and information outlets protected under US Patent Number 6,123,577. FatCat5™, FatCat5 System™, Chameleon Color Coding System™, Balanced Star™, Balanced Line™, Monoline™ and Precision Wave™, InstaSnake™, CineSnake™ are trademarks of Energy Transformation Systems. All other brand or product names are or may be trademarks of, and are used to identify the products or services of their respective owners.
 Revised 11/01/2012



Energy Transformation Systems, Inc.
 43353 B Osgood Road, Fremont, CA 94539
 www.etslan.com
 800-752-8208 510-656-2012 Fax 510-656-2026

