

# BATT1500-EXT External Battery Pack

PFPower's BATT1500-EXT Battery Pack offers extended run-times for the MB1500 and F1500-UPS UPS systems.


These 2U packs esthetically match the UPS's, and can similarly be rack or tower mounted.

The heavy gauge power cord is adapted with plug-n-play DC connectors for easy installation.

The all metal enclosure safely houses the 8 (eight) 12V 9Ah batteries which are connected via 2 strings of 4 in serial.



Easily connects to the back of the MB1500 or the F1500-UPS

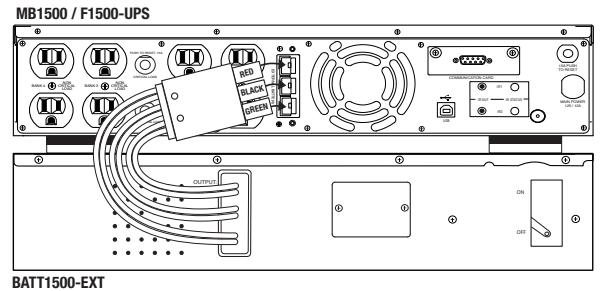

## Features include:

- Form Factor – 2U configuration supports both rack and tower mounting.
- Metal Housing – Rigid metal construction allows for placement in areas with a demanding environment.
- Power On/Off Switch - Local power switch for manual reset & control.
- Back-panel fuse - User replaceable fuse which is easily accessed from the rear panel.

### BATT1500-EXT Specifications:

Battery	
Battery Type	Sealed lead acid
Battery Size	12V/9AH
User Replaceable	Yes
Hot Swappable	Yes
Typical Recharge Time	8 Hours
Replacement Battery	BB Battery - HR9-12
Battery Quantity	8
Physical	
Rack Size	2U
Environmental	
Operating Temperature	32 °F to 95°F / 0°C to 40 °C
Operating Humidity	0% - 95% non condensing
Maximum Operating Elevation	10,000 ft / 3,000 m
Storage Temperature	5 °F to 113°F / -15°C to 45 °C
Maximum Storage Elevation	50,000 ft / 15,000 m
Certifications	
Certifications	UL1778, cUL 107.1, FCC DOC Class B
ROHS	ROHS Compliant
Warranty	
Product Warranty	2 Years Limited

Extended runtime for the BATT1500-EXT listed below.  
(Nominal time in minutes at Half / Full loads) MB1500

UPS UNIT	BATT1500-EXT	MINUTES	
		HALF LOAD	FULL LOAD
MB1500 / F1500-UPS			
MB1500 / F1500-UPS (STAND ALONE)		30	12
MB1500 / F1500-UPS	+ 1 BATT1500-EXT	101	45

### WEIGHTS, MEASUREMENTS & UPC'S FOR ORDERING & SHIPPING BATT1500-EXT

SINGLE MODEL BATT1500-EXT	
Dimensions	Weight
L 17" x H 4" x W 19"	67 lbs.
SINGLE UNIT CARTON	
Dimensions	Weight
L 23.5" x H 10.5" x W 21"	75 lbs.
UPC 050616-008570	

MODEL: BATT1500-EXT

