


CLASSIC SERIES POWER CONDITIONERS (20 AMP)



Furman brings together superior protection and outstanding performance in a sturdy, rack-mountable design. Classic Series Power Conditioners feature Series Multi-Stage Protection (SMP), Linear Filtering Technology (LiFT), Extreme Voltage Shutdown (EVS), and offer a new industrial design and full feature set engineered specifically for the A/V professional.

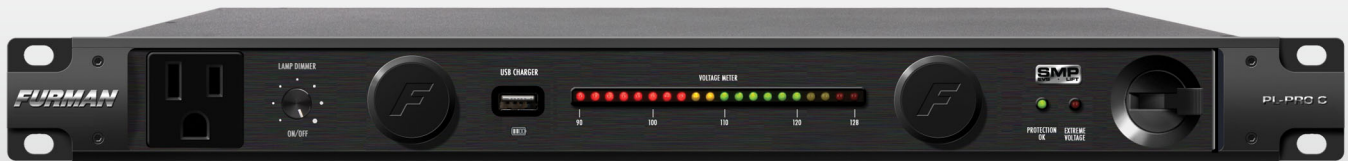

PL-PRO C FEATURES



PL-PRO DMC FEATURES



PL-PRO REAR PANEL (ALL MODELS)


ALL PL PRO UNITS FEATURE FURMAN'S "SECURE STRAPS" WALL WART LOCKING SYSTEM.

FURMAN

WWW.FURMANSOUND.COM

THE POWER OF **FURMAN** TECHNOLOGY

ALL CLASSIC MODELS FEATURE



DUAL SMOOTH TRACK RETRACTABLE LED LIGHTS
ILLUMINATE EQUIPMENT IN YOUR RACK



ISOLATED OUTLET BANKS MINIMIZE
INTER-COMPONENT INTERFERENCE
AND NOISE CONTAMINATION



REAR PANEL BNC CONNECTOR POWERS
ANY STANDARD GOOSENECK LAMP
FOR REAR RACK ILLUMINATION



FURMAN'S EXCLUSIVE SMP TECHNOLOGY
PROVIDES THE HIGHEST LEVEL OF SURGE &
SPIKE PROTECTION AVAILABLE



NINE TOTAL OUTLETS (8 REAR PANEL OUTLETS
AND ONE FRONT PANEL CONVENIENCE OUTLET)



LED STATUS INDICATORS WARN YOU WHEN
VOLTAGE IS OUTSIDE OF NOMINAL RANGE OR
WHEN PROTECTION HAS BEEN COMPROMISED



THREE WIDELY SPACED OUTLETS ACCOMMODATE
BULKY AC POWER TRANSFORMERS




LiFT OFFERS LINEAR AC POWER FILTERING TO
ENSURE CLEAN POWER FOR UNEQUALED
AUDIO & VIDEO CLARITY



ADVANCED EVS CIRCUITRY DETECTS DANGEROUS VOLTAGE
IRREGULARITIES AND SAFELY POWERS DOWN ITSELF AND
CONNECTED EQUIPMENT IN UNSAFE CONDITIONS




20 AMP RATING FEATURING A HIGH INRUSH MAG-
NETIC CIRCUIT BREAKER FOR ADDED PROTECTION



FRONT PANEL CONVENIENCE CHARGER ALLOWS
YOU TO CHARGE MOST MEDIA DEVICES OR
POWER A USB LAMP

PL-PRO C FEATURES:



SEGMENTED LED VOLTMETER MONITORS AND
DISPLAYS INCOMING LINE VOLTAGE

PL-PRO DMC FEATURES:



LARGE DIGITAL VOLTMETER/AMMETER WITH
DISCRETE DIMMER BUTTON DISPLAYS LINE
VOLTAGE AND TRUE RMS CURRENT DRAW

CLASSIC SERIES REAR PANEL



CLASSIC SERIES SPECIFICATIONS

MAXIMUM OUTPUT CURRENT:
20 AMPS

LINE CORD:
CAPTIVE 3/1 2 AWG, 10 FT BLACK CORD WITH NEMA 20 PLUG

PULL OUT LIGHTS:
TWO MULTI-LED, DIMMABLE LAMPS

BNC SOCKET W/SWITCH:
REAR RACK LAMP, 12VAC 500MA MAX (LAMP NOT INCLUDED)

OPERATING VOLTAGE:
90 TO 139 VAC

OVER VOLTAGE SHUTDOWN:
140 VAC NOMINAL

SPIKE PROTECTION MODES:
LINE TO NEUTRAL, ZERO GROUND LEAKAGE

SPIKE CLAMPING VOLTAGE:
188 VAC PEAK @3,000 AMPS

RESPONSE TIME:
1 NANOSECOND

MAXIMUM SURGE CURRENT:
6,500 AMPS

NOISE ATTENUATION:
10 DB @ 10KHZ, 40 DB @ 100KHZ, 50 DB @500 KHZ

DIMENSIONS:
19" W x 10.5" D x 1.75" H

WEIGHT:
12 LBS.

POWER CONSUMPTION:
12 WATTS