
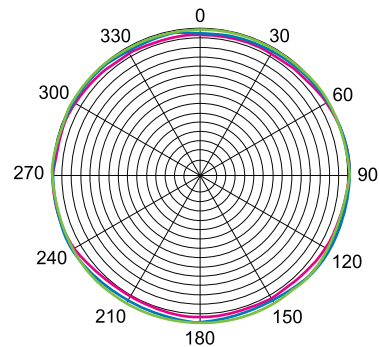


# TEST MICROPHONE

**CM-TM**

The Check Mate Test Mic (CM-TM) captures acoustic measurements of a room. The CM-TM can be used with numerous software programs or RTAs (Real Time Analyzers). The CM-TM provides a flat frequency response, and is perfect in the studio, live sound, or installed sound.

- Polar Pattern: Omni-directional
- Frequency Response: 20Hz-20kHz
- Sensitivity:  $-32\text{dB} \pm 2\text{dB}$   
( $0\text{dB} = 1\text{V}/\text{Pa}$  at 1kHz)
- Output Impedance:  $100\Omega \pm 30\%$
- Working Voltage: 9-52V
- Diameter: 12.75mm/ (about .5 inches)

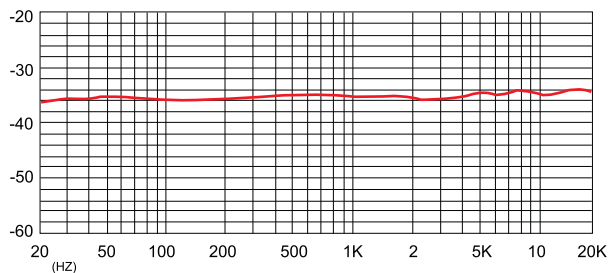

MAKERS OF THE ORIGINAL  
HOT SPOT PERSONAL MONITOR

Specifications subject to change without notice.

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 [www.galaxyaudio.com](http://www.galaxyaudio.com)

Distributed outside the United States by E and E Exports, Inc. 2815 Junipero Ave. Suite 101 Signal Hill, CA 92614

562.988.3447 FAX 562.989.3037

Distributed in Canada by Audio Distributors International (ADI) 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada

450.449.8177 FAX 450.449.8180

051711