

DSPOT

DIGITAL SIGNAL PROCESSOR

DS-EQ215

The new DSPOT Series offers a full line of Digital Signal Processors. These processors allow the user to manage and clarify the sound produced in their speaker system. Each model can be accessed by the front panel or the convenient easy to use included software.

User defined presets provide a useful tool to live sound, where a preset can be used for frequently visited venues or specific performers in a fixed install. Presets can be also be saved to internal or removable drives, in addition to the device itself, allowing for a preset to be designed in advance, and then downloaded on site.

The DSPOT software provides many filtering and other detailed settings easily controlled on your PC, to refine your sound. All DSPOTs are perfect for fixed and live applications.

The Galaxy Audio DS-EQ215 is not just a digital graphic and parametric equalizer (PEQ), it also has a stereo noise gate, crossover, delay, limiter, & muting, in addition to input and output metering.

Each 15 band EQ channel has a High and Low Pass Filter with slope & frequency control. PEQs provide great flexibility in setting the specific frequency for each EQ filter, in addition to it's Q. They can be done by typing your settings, or making adjustments to the graph with the mouse. The DS-EQ215 comes with over a dozen preset EQ settings to choose from, or build your own and save it to a drive or the device.

- 2x15 Parametric or Graphic Filters
- 2 Channels, Configurable as Stereo, or Two Independent Channels
- Hp/Lp Filters up to 24dB/Oct each Channel
- Independent Channel Gain, Polarity, Delay, Limiter and Mute on each Output channel
- Control via Front Panel or External PC
- Easily remotely controlled by a USB port, or MIDI
- 32 Recall Memories, 16 User, 16 Factory
- Balanced XLR and 1/4" Inputs and Outputs



MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR



DSPOT

DIGITAL SIGNAL PROCESSOR

DS-EQ215

Specifications



Inputs: Balanced XLR and TRS
Input Max Level: 9dBu
Outputs: Balanced XLR and TRS
Output Max Level: 9dBu

AID and DIA Resolution: 20 bit
Process Resolution: 24x32 bit
Processes: Equalizer
Display: LCD 2x20 alphanumeric
Connectivity: MIDI/USB

SIN Ratio: >90 dBa (Bypass)
THD+N: <0.01 % @ -6 dBFS (Bypass)
Frequency Response: 20Hz-20kHz +1- 0.5dB

Dimensions: 7.75" x 19" x 1.75"
 (196.85 x 482.6 x 44.45 mm)

Weight: 5.51lb (2.5kgs)

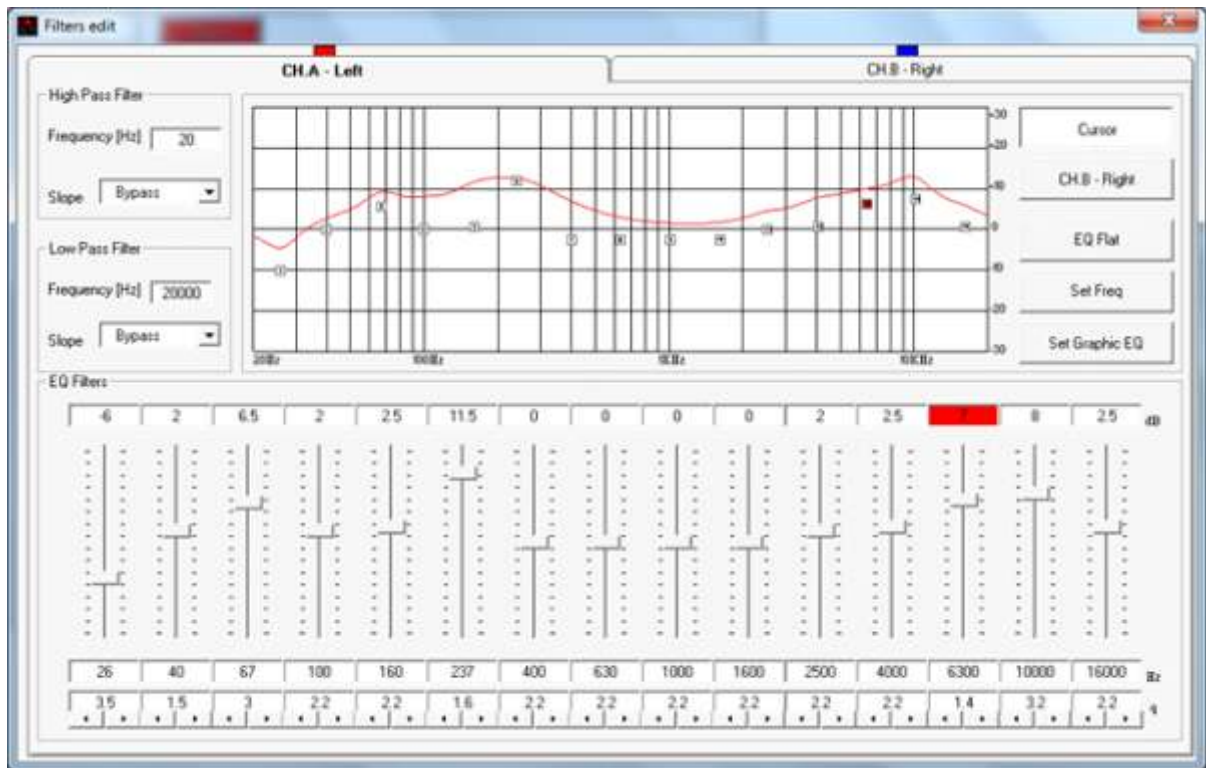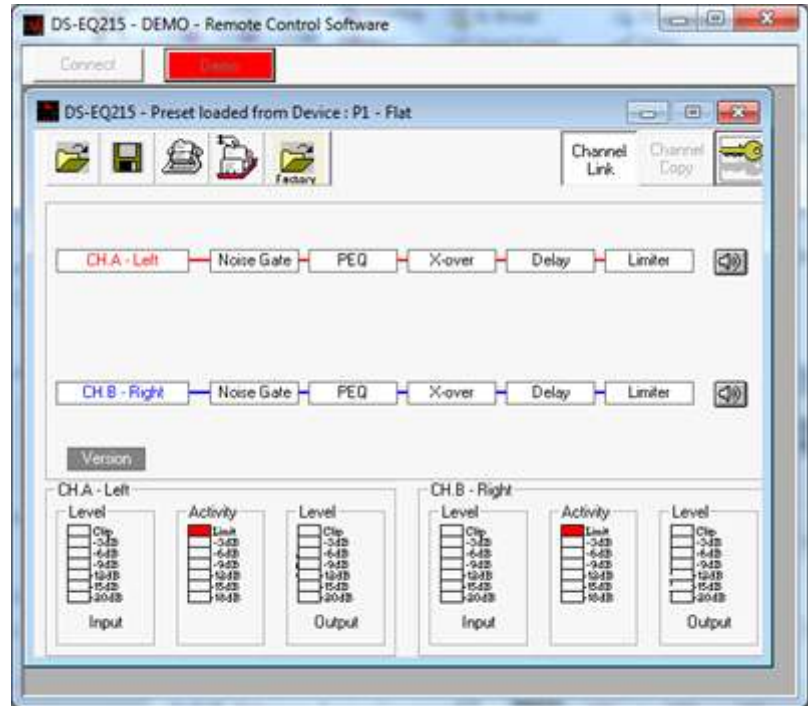

MAKERS OF THE ORIGINAL
 HOT SPOT PERSONAL MONITOR

Specifications subject to change without notice.

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 www.galaxyaudio.com
 Distributed outside the United States by E and E Exports, Inc. 2815 Junipero Ave. Suite 101 Signal Hill, CA 92614
 562.988.3447 FAX 562.989.3037
 Distributed in Canada by Audio Distributors International (ADI) 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada
 450.449.8177 FAX 450.449.8180