ANY SPOT®

WIRELESS HEADSET MICROPHONES

HSD, HSH, HSE, ESS

You choose the STYLE, COLOR, MIC ELEMENT* and the CONNECTOR**

Galaxy microphones works great with many wireless transmitters available. Detachable cables are available to use with transmitters made by Shure®, Sennheiser®, AKG®, Audio Technica®, and Galaxy Audio®. Plus we can also wire our headsets to work with nearly every other brand out there. You can also use the microphone with most PC sound cards (adaptor not included). Also, our JIB/PB may be used if a wireless transmitter is not available or needed. The JIB/PB will supply phantom power (if needed) to the headset and adapt the mini connector on the headset to a standard XLR connector so it can be attached to a soundboard. The JIB/PB is GREAT for those situations where wireless is not needed.

The super lightweight designs make wearing the microphones more comfortable, even for long periods of time, without using excessive pressure to hold the microphone in place.

HSD

- Hooks Over Both Ears
- Flexible for Easy Formation
- 5" Mic Boom Length
- 3.5mm Omni or 9.75mm Uni Element
- Freq. Response:
  Omni..20Hz-20kHz
  Uni.....70Hz-16kHz
- Beige, Cocoa or Black
- Windscreen

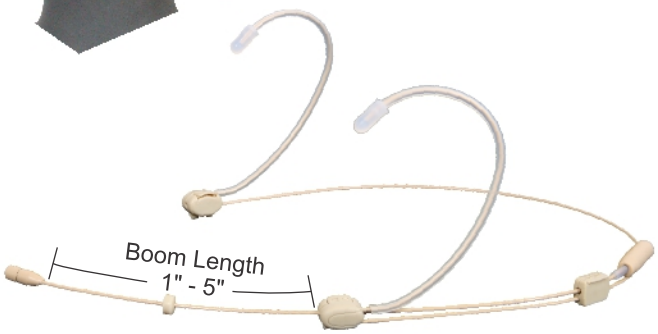

HSH

- Headset wraps around head
- 4" Mic Boom Length
- 3.5mm Omni or 9.75mm Uni Element
- Freq. Response:
  Omni..20Hz-20kHz
  Uni.....70Hz-16kHz
- Beige or Black
- Windscreen

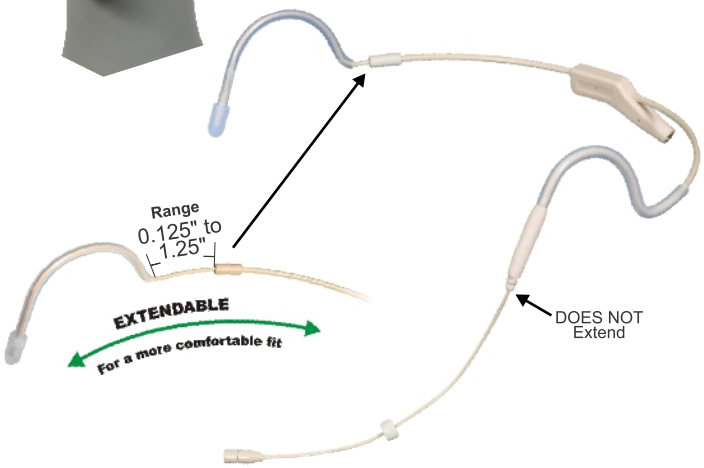

FREQUENCY RESPONSE CURVE for HSE, HSD & HSH Headsets

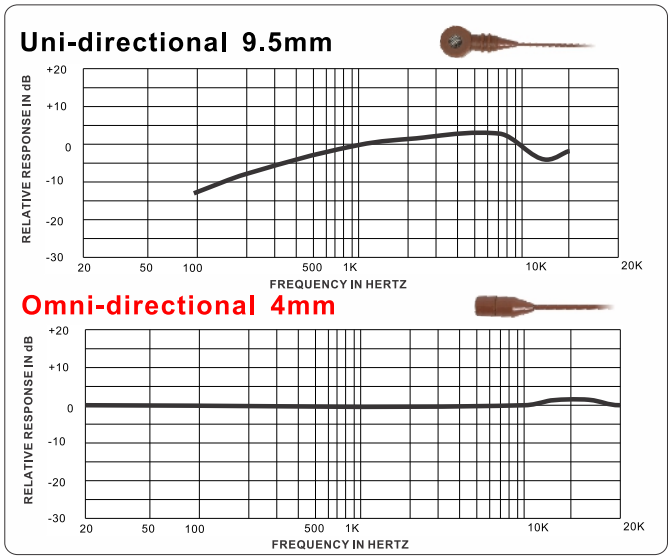

Polar Pattern shown on opposite side

SPECIFICATIONS:

Polar Pattern: Uni-directional / Omni-directional.
Frequency Response: 70 Hz to 16,000 Hz (Uni-directional)
20 Hz to 20,000 Hz (Omni-directional)
Impedance: 1,400Ω ± 30% (at 1 KHz) (Uni-directional)
1,100Ω ± 30% (at 1 KHz) (Omni-directional)
Sensitivity: -67dB ± 3dB (0dB=1V/microbar) (Uni-directional)
-66dB ± 3dB (0dB=1V/microbar) (Omni-directional)
Max SPL: 130dB
Operating Voltage: 1V~10V DC (RL:2K2Ω)
Cable Length: 53" (1.3M) x 1.5 Diameter, 2mm Thick
Detachable Cable

We WIRE for most BRANDS

GALAXY AUDIO®

ANY SPOT®

WIRELESS HEADSET MICROPHONES

HSD, HSH, HSE, ESS

You choose the STYLE, COLOR, MIC ELEMENT* and the CONNECTOR**

We WIRE for most BRANDS

HSE

- Rests on One Ear
- Omni or Uni Element
- Hooks around one ear
- Freq. Response:
  - Omni..20Hz-20kHz
  - Uni.....70Hz-16kHz
- Beige, Black, or Cocoa
- Flexible for Easy Formation
- 3.5mm Omni or 9.75mm Uni Element
- 4" Mic Boom Length
- 1.5mm Thick Detachable Cable
- Windscreen

ESS

- Rests on One Ear
- 3.5mm Omni Element
- Hooks around one ear
- Beige, Black, or Cocoa
- Flexible for Easy Formation
- 1.5" Mic Boom Length
- 1.5mm Thick Detachable Cable
- Windscreen

POLAR PATTERN HSE, HSD & HSH Headsets

OMNI ELEMENT POLAR
HEADSETS HSE, HSD & HSH
1000Hz

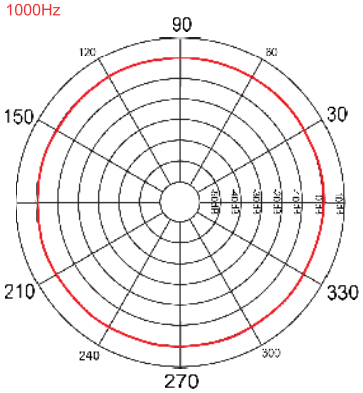

UNI ELEMENT POLAR
HEADSETS HSE, HSD & HSH
1000Hz

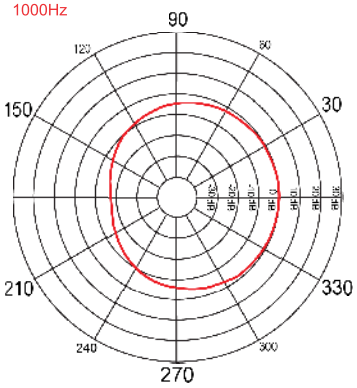

ESS

SPECIFICATIONS:

Polar Pattern: Omni-directional.
Frequency Response: 20hz - 20kHz
Impedance: 2,000Ω
Sensitivity: -63dB ± 3dB
Max SPL: 130db
Operating Voltage: 4.5V Dc
Boom Length: 1.5"
Cable Length: 53" (1.3M) x 1.5 Diameter,
1.5mm Thick Detachable Cable

Frequency Graph shown on opposite side

*ESS comes only in Omni Directional
** Can be wired for almost any brand. Call for more details

Specifications subject to change without notice.

GALAXY AUDIO

MAKERS OF THE ORIGINAL
HOT SPOT PERSONAL MONITOR

601 E. Pawnee Wichita, KS 67211 316. 263.2852 FAX 316.263.0642 www.galaxyaudio.com
Distributed outside the United States by **E and E Exports, Inc.** 2815 Junipero Ave. Suite 101Signal Hill, CA 92614
562.988.3447 FAX 562.989.3037
Distributed in Canada by **Audio Distributors International** (**ADI**) 1275 Newton, unit 6 Boucherville, QC J4B 5H2 Canada
450.449.8177 FAX 450.449.8180

V11012013