

STORM Mobile

Multi I/O Processor



Capture anything, edit anywhere. STORM Mobile gives you the freedom to edit wherever your work takes you — in the studio or on location.

STORM Mobile from Grass Valley, a Belden Brand, strengthens the EDIUS Pro 7 NLE's real-time field editing capability by providing a variety of inputs and outputs using either PCIe 1X card for desktops or an ExpressCard/34 card for laptops, with several configurations to choose from.

STORM Mobile's comprehensive video editing interface breakout box is equipped with an HDMI I/O (for video formats up to 1080i), analog component, analog composite, S-Video and unbalanced audio for the ultimate in connectivity.

While the STORM Mobile desktop PCIe 1X card supplies power to the STORM Mobile breakout box, an AC adapter is supplied for laptop ExpressCard/34 card operation.

The STORM Mobile chassis is available in two versions: an internal PC 5-inch drive bay type and an external breakout box type. The breakout box can be easily be converted into a 5-inch bay type by the user.

STORM Mobile also offers several additional hardware benefits. The integrated hardware downconversion function is handy when you are editing HD but want to make sure your picture is good in SD, such as when creating DVDs. Downconversion is hardware-based, so the process doesn't use any CPU power, and has no affect on editing performance.

Super High-Quality Capture from Camera Through Output

By using the HDMI output of your camcorder, you can capture video with STORM Mobile at higher quality (HQ mode: 4:2:2, I-Frame, 150 Mb/s) than with outputting AVCHD (4:2:0, Long GOP, 18 Mb/s). This is very useful when creating footage for keying work. MXF capture with MPEG-2 (XDCAM compatible) or AVC-Intra (P2 compatible) is also available.

Real-Time Display Streamlines Workflows

STORM Mobile's enhanced real-time monitoring capability gives you separate composite outputs which always show an SD picture regardless of the resolution used for editing. STORM Mobile always outputs a true, native resolution picture without any frame skipping or degradation.

Make the Most of Old VHS, Video8 and Hi8 Assets

STORM Mobile leverages the three-dimensional Y/C separation used in the ADV-C-300 converter, which means you can capture old analog formats at the best possible picture quality.

Audio Monitoring

STORM Mobile has a separate headphone output with a digital amplifier which is always available while editing, providing you with the best monitoring experience available.

STORM Mobile Multi I/O Processor

KEY FEATURES

- HDMI input/output for connectivity with HDMI devices and real-time monitoring from the included EDIUS Pro 7 NLE software (where included – see Ordering Information, Windows 7/8/8.1 (64-bit) required)
- Component, S-Video and composite analog video I/O
- 8-channel embedded audio through HDMI
- Unbalanced stereo analog audio I/O
- Hardware downconversion to monitor HD project in an SD monitor at the same time
- PCIe 1X card for desktop PC connection with power supply function
- ExpressCard/34 card for laptop PC connection

- Available in breakout box version as well as 5-inch drive bay mounted version
- 5V DC operation
- Windows 8/8.1 (32-bit or 64-bit), Windows 7 (32-bit or 64-bit), Windows Vista (32-bit or 64-bit) and Windows XP (32-bit) support for hardware-only configurations (configurations including EDIUS Pro 7 require Windows 7/8/8.1, 64-bit)

Note: For Windows 8/8.1 use with EDIUS Pro 7, EDIUS v7.21b1530 update is required.

SPECIFICATIONS

Supported Capture Formats

Format	HDMI	Component	S-Video/ Composite
1920x1080 59.94i	x	x	
1440x1080 59.94i	x	x	
1280x720 59.94p	x	x	
720x480 59.94p 4:3	x ^{*1}		
720x480 59.94p 16:9	x ^{*1}		
720x486 59.94i 4:3		x	x
720x486 59.94i 16:9		x	x
720x480 59.94i 4:3	x	x	x
720x480 59.94i 16:9	x	x	x
1920x1080 50i	x	x	
1440x1080 50i	x	x	
1280x720 50p	x	x	
720x576 50p 4:3	x ^{*1}		
720x576 50p 16:9	x ^{*1}		
720x576 50i 4:3	x	x	x
720x576 50i 16:9	x	x	x

Note: STORM Mobile will NOT capture analog video protected by Macrovision or CGMS-A.

*1 SD progressive video is captured as interlaced video.

STORM Mobile I/O

Video in	HDMI	1
	HD/SD component	1
	S-Video	1 (common connector w/component)
	Composite	1
Video out	HDMI	1
	HD/SD component	1
	S-Video	1 (common connector w/component)
	Composite	1
Audio in	HDMI embedded	8 channels
	Unbalance audio (RCA pin)	2 channels
Audio out	HDMI embedded	8 channels
	Unbalance audio (RCA pin)	2 channels
	Headphone	1 (stereo mini jack)

Bus Interface

PCI Express Rev. 1.1 x1 lane or ExpressCard/34 card

Dimensions (WxHxD)

External model: 165 mm x 42 mm x 142 mm (6.5 in. x 1.7 in. x 5.6 in.)

Bay model: 148 mm x 42 mm x 142 mm (5.8 in. x 1.7 in. x 5.6 in.)

Weight

External model: 1,200g (42.3 oz.)

Bay model: 800g (28.2 oz.)

Minimum System Requirements (STORM Mobile Hardware)

Bus Interface

STORM Mobile Bay Unit or STORM Mobile Breakout Box with PCIe Card:

One free PCI Express x1 bus slot

STORM Mobile Breakout Box with ExpressCard/34 Card:

One free ExpressCard/34 card slot

Operating System

STORM Mobile Standalone:

Windows 8/8.1 (32-bit or 64-bit)

Windows 7 (32-bit or 64-bit)

Windows Vista (SP2 or later, 32-bit or 64-bit)

Windows XP (SP3 or later, 32-bit)

STORM Mobile with EDIUS Software:

Windows 7/8/8.1 (64-bit)

Minimum System Requirements (EDIUS Pro 7 Software)

CPU

Any Intel Core 2 or Core iX CPU. Intel or AMD single core CPU with a 3 GHz processor speed or faster (multiple CPUs and/or multi-core CPUs are recommended). SSE2 and SSE3 instruction set supported

Memory

1 GB RAM (4 GB or more recommended)

Hard Disk

6 GB of hard disk space is required for installation (including third-party software)

Drive with ATA100/7,200 RPM or faster is necessary for video storage:

Available HDD disc space should be twice the size of the file to be edited

RAID-0 is recommended for HD resolution editing

Graphics Card

A graphics card supporting higher resolution than 1024x768 (32-bit), Direct3D 9.0c or later, and PixelShader Model 3.0 or later is required

For SD editing: 256 MB or larger required, 512 MB or larger recommended

For HD editing: 512 MB or larger required, 1 GB or larger recommended

Sound Card

A sound card with WDM driver support is required

DVD-ROM Drive

Required for software installation

Blu-ray Disc writer, DVD-R/RW or DVD+R/RW drive is required when creating Blu-ray Discs or DVDs

Internet Connection

Required for software license activation

Operating System

Windows 7/8/8.1 (64-bit)

Note: External video decks/cameras may require either a free FireWire (IEEE 1394) port or USB 2.0 port for connectivity.

Note: For Windows 8/8.1 use with EDIUS Pro 7, EDIUS v7.21b1530 update is required.

SPECIFICATIONS
Supported Output Formats

Format	HDMI Out	Component Out	S-Video/Composite Out
1920x1080 59.94i	1920x1080/59.94i	1920x1080/59.94i or 720x486/59.94i*2	720x486/59.94i*2
1920x1080 29.97p over 59.94i			
1440x1080 59.94i			
1440x1080 29.97p over 59.94i			
1280x1080 59.94i			
1280x1080 29.97p over 59.94i	1280x720/59.94p	1280x720/59.94p or 720x486/59.94i*2	720x486/59.94i*2
1280x720 59.94p			
1280x720 29.97p over 59.94p			
960x720 59.94p			
960x720 29.97p over 59.94p			
1920x1080 29.97p	1920x1080/29.97p	1920x1080/29.97p	Disabled
1440x1080 29.97p			
1280x1080 29.97p			
720x486 59.94i 4:3	720x480/59.94i → 720x480/59.94p*1	720x486/59.94i	720x486/59.94i
720x486 59.94i 16:9			
720x486 29.97p over 59.94i 4:3			
720x486 29.97p over 59.94i 16:9			
720x480 59.94i 4:3 (DVD)			
720x480 59.94i 16:9 (DVD)			
720x480 59.94i 4:3			
720x480 59.94i 16:9			
720x480 29.97p over 59.94i 4:3			
720x480 29.97p over 59.94i 16:9			
1920x1080 50i	1920x1080/50i	1920x1080/50i or 720x576/50i*2	720x576/50i*2
1920x1080 25p over 50i			
1440x1080 50i			
1440x1080 25p over 50i	1280x720/50p	1280x720/50p or 720x576/50i*2	720x576/50i*2
1280x720 50p			
1280x720 25p over 50p			
960x720 50p	1920x1080/25p	1920x1080/25p	Disabled
960x720 25p over 50p			
1920x1080 25p			
1440x1080 25p	720x576/50i → 720x576/50p*1	720x576/50i	720x576/50i
720x576 50i 4:3 (D1, DVD)			
720x576 50i 16:9 (D1, DVD)			
720x576 50i 4:3 (DV)			
720x576 50i 16:9 (DV)			
720x576 25p over 50i 4:3			
720x576 25p over 50i 16:9	1920x1080/59.94i	1920x1080/59.94i or 720x486/59.94i*2	720x486/59.94i*2
1920x1080 23.98p over 59.94i			
1440x1080 23.98p over 59.94i			
1280x1080 23.98p over 59.94i	1280x720/59.94p	1280x720/59.94p or 720x486/59.94i*2	720x486/59.94i*2
1280x1080 23.98p over 59.94p			
960x1080 23.98p over 59.94p			
1920x1080 23.98p	1920x1080/23.98p	1920x1080/23.98p	Disabled
1440x1080 23.98p			
1280x1080 23.98p			
720x486 23.98p over 59.94i 4:3	720x480/59.94i → 720x480/59.94p*1	720x486/59.94i	720x486/59.94i
720x486 23.98p over 59.94i 16:9			
720x480 23.98p over 59.94i 4:3			
720x480 23.98p over 59.94i 16:9			

*1 If the attached HDMI monitor cannot receive an interlaced signal, STORM Mobile automatically converts that interlaced signal to progressive.

*2 Downconverted.

STORM Mobile Multi I/O Processor

ORDERING

EPR7-STB-SM-YP

STORM Mobile 5-inch bay unit + PCIe card + EDIUS Pro 7

EPR7-STB-SM-BP

STORM Mobile breakout box unit + PCIe card + EDIUS Pro 7

EPR7-STB-SM-BX

STORM Mobile breakout box unit + ExpressCard/34 card + EDIUS Pro 7 + AC adapter

STORM MOBILE P

(Available in EMEA and APAC only)

STORM Mobile PCIe card ONLY

STORM MOBILE X

(Available in EMEA and APAC only)

STORM Mobile ExpressCard/34 card ONLY + AC adapter

Note: EDIUS Pro 7 requires Windows 7/8/8.1 (64-bit) and requires that all previous versions of EDIUS software be uninstalled.

PACKAGE CONTENTS

STORM Mobile Bay Unit:

- Bay unit
- PCI Express card
- Connector cable
- STORM Mobile Setup Guide



STORM Mobile Breakout Box with PCIe Card:

- External unit
- PCI Express card
- Connector cable
- STORM Mobile Setup Guide




STORM Mobile Breakout Box with ExpressCard/34 Card:

- External unit
- ExpressCard/34 card
- Connector cable
- STORM Mobile Setup Guide



Note: In configurations where EDIUS Pro 7 is included (see Ordering Information), the software is provided as an EDIUS Pro 7 software installation disc set (DVD-ROM). Windows 7/8/8.1 (64-bit) is required.

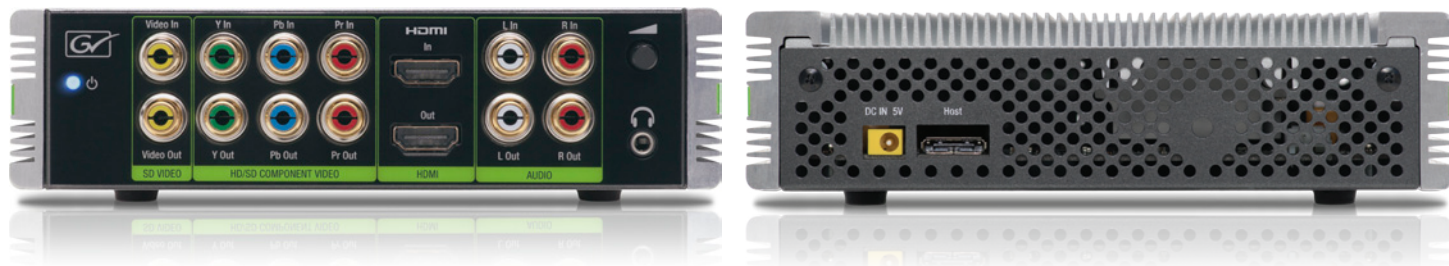

GVB-1-0211B-EN-DS

WWW.GRASSVALLEY.COM

Join the Conversation at **GrassValleyLive** on Facebook, Twitter, YouTube and **Grass Valley - A Belden Brand** on LinkedIn.



Belden, Belden Sending All The Right Signals and the Belden logo are trademarks or registered trademarks of Belden Inc. or its affiliated companies in the United States and other jurisdictions. Grass Valley, EDIUS and STORM are trademarks or registered trademarks of Grass Valley. Belden Inc., Grass Valley and other parties may also have trademark rights in other terms used herein.

Copyright © 2014 Grass Valley. All rights reserved. Specifications subject to change without notice.