


AVO-A4-WP-F Technical Specification

Four Channel Analog Audio Twisted Pair Wall Plate Extender

Rev. 130115

The Intelix AVO-A4-WP-F balun transmits four mono or two stereo analog audio signals via standard structured cabling, such as Cat 5e. Used in pairs, the AVO-A4-WP-F transmits analog audio in either direction up to 2,500 feet.

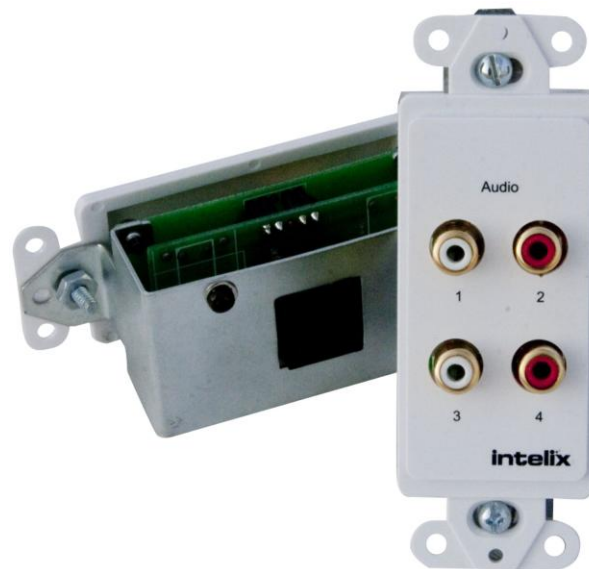

Technical Specifications	
I/O Connections	
Audio	One (1) RCA per channel
Twisted Pair	One (1) 8P8C port (RJ45)
Supported Audio	
Maximum Distance via Cat 5e	2500 ft.
RJ45 Pin Configuration	Pins 1 and 2: Audio 1 Pins 3 and 6: Audio 2 Pins 4 and 5: Audio 4 Pins 7 and 8: Audio 3
Audio Frequency Response	20 Hz to 20 kHz
Impedance	600 ohms, unbalanced
Audio Transformer Isolation	500V
Nominal Level	1.0 volts
Insertion Loss	1 dB
Common Mode Rejection	Greater than 40 dB
Chassis and Environmental	
Enclosure	Galvanized Steel
Dimensions	102 mm x 36 mm x 43 mm (4 in. x 1.4 in. x 1.7 in.)
Shipping Weight	0.28 kg (0.62 lbs)
Operating Temperature (Environment)	0° to +40° C (+32° to +104° F)
Operating Humidity (Environment)	20% to 90%, Non-condensing
Storage Temperature (Environment)	-10° to +60° C (+14° to +140° F)
Other	
Regulatory	RoHS
Standard Warranty	2 Years
Included Accessories	Decora insert, Mounting Screws, Installation Guide
Compatible Products	AVO-A4-F, AVO-A4-WP110

Distances and picture quality may be affected by cable grade, cable quality, source and destination equipment, RF and electrical interference, and cable patches. Intelix specifications are based on straight-through cabling with standard-grade Cat 5e unless noted otherwise.