

Numeric Displays

Numeric Displays for all our timing products are tri-colour, green, amber and red. They range in size of character height from 12.5mm (½") to 125mm (5").

The Standard, Big and Maxi Displays have a removable and reversible bracket that allow for wall and ceiling mount, all have an adjustable viewing angle. The Mini has a unique hexagonal case to allow for 120° or 180° viewing.

When counting down, a preceding minus (-) can be seen from -0:01 to -9.59 in the first character position to aid the notification of over running.

Cable distance 100M or 300ft

3 Year Limited Factory Warranty



Main Features

- ✓ Tri-Colour - green, amber and red
- ✓ Easy mounting with angle adjustment brackets
- ✓ Power and data through one XLR cable

Specifications

Power

12V DC (Maxi 24V DC)

Signals

Rs232 9600 Baud Data
- command format available on request

Dimensions mm (inch) and Weight

D x W x H

Maxi

90 (3½") x 510 (20") x 215 (8½") – 3.2Kgs (7lbs)

Big Display

55 (2¼") x 330 (13") x 145 (5¾") – 1.2Kgs (2.10lbs)

Standard Display

55 (2¼") x 160 (6¼") x 90 (3½") – 670gm (1 lb 8oz)

Mini Display

50 (2") x 115 (4½") x 50 (2") – 245gm (9oz)
- Fixed flat cable 1200mm (4ft)

Digits in Time



Accessories (Optional Extras)

SPLIXLER, can be used to split from the controller to 2 displays passively.

CD Split, Active 4 way Amplifier for greater distance and number of displays required.



Note: XLR Cable is not supplied as standard

Interspace Industries

Unit 1A, 126 Great North Road, Hatfield, Hertfordshire AL9 5JN, UK


call: +44 (0) 1462 600 101

email: moreinfo@interspaceind.com

web: www.interspaceind.com

Maxi Display

125mm (5") high numbers - highly visible from the back of the room. A mounting bracket that can be reversed for ceiling mounting as well as for wall and floor. Supplied with PIM, a Power Input Module and separate 24V power supply. The PIM injects 24V in to the line so you still only have a single cable which is reversed XLR to the display.

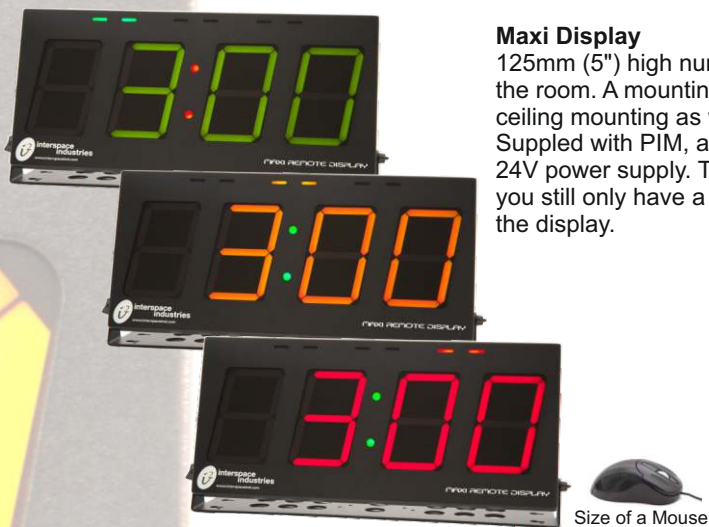

Size of a Mouse



Size of a Mouse

Big Display

75mm (3") high numbers with good distance visibility. A versatile bracket that can be fitted to floor, wall and ceiling.



Size of a Mouse

Standard Display

A really useful and clear display with 25mm (1") high number that is great for down stage or on a lectern. A fully rotational bracket makes this display a good standard.



Size of a Mouse

Mini Display

The shape of this display allows it to sit at 120° or 180° straight up for top down viewing. This has a fixed, flat cable with an XLR on the end for neat installation on a lectern. This discrete product is great for viewing up close. 12.5mm (1/2") high numbers.

Background image shown actual size