

# Indicator<sup>2</sup>

**Indicator<sup>2</sup>** is the AV professional's best friend when it comes to controlling a live event. Signaling to presenters or crew to ensure everything runs to time is the key to a smooth, professional show and **Indicator<sup>2</sup>** is a simple and effective 'Traffic Light' system. Using everyone's understanding of green, amber and red signals, **Indicator<sup>2</sup>** silently prompts presenters when to speak (green light), when to summarise (amber light) and when to conclude (red light).


The main control unit has dual indicator power outputs so that two lamps can be located for easy viewing, or to cue more than one presenter or crew at the same time. The indicator display lamps are self-contained and are connected using standard 3-core XLR (mic) cables. The optional CombiTower can be used and gives a 360 Degree viewing.

Operation is by the main unit front panel. Green, amber and red buttons will select or deselect that colour. Selecting another colour will deselect the first colour. A flash feature allows the operator to emphasise that time has run out. Cable lengths can be in excess of 100 metres (300 ft).

## Main Features:

- ✓ Simple set-up and operation – can be operational in just minutes
- ✓ Dual signal output – 2 presenters or crew can see the same signal
- ✓ Simple lamp changes colour – discreet yet highly effective
- ✓ Optional CombiTower for all round viewing
- ✓ Flashing function – to emphasise that time has run out!
- ✓ Only requires standard 3-pin XLR (mic) cables to interconnect

## 3 Year Limited Factory Warranty

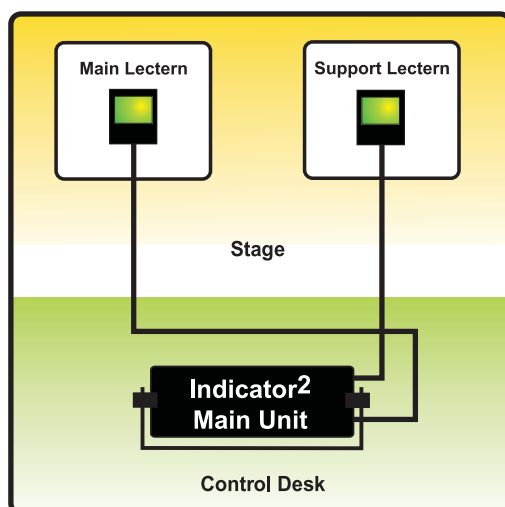

Interspace Industries

Unit 1A, 126 Great North Road, Hatfield, Hertfordshire AL9 5JN, UK

call: +44 (0) 1462 600 101

email: [moreinfo@interspaceind.com](mailto:moreinfo@interspaceind.com)

web: [www.interspaceind.com](http://www.interspaceind.com)



## Live Event Timekeeping Made Simple!



## Specifications

### Signals:

2 outputs each carrying 12VDC 100mA (limiting)

### Connectors:

2 x 3-pin male XLR

IEC power connector

### Accessories included:

1 or 2 Remote indicator lamps (IND2-1 : IND2-2)

Power cable

### Required user parts:

Standard 3-pin XLR (mic) cables

### Dimensions mm (inch):

Base unit

DxWxH: 62 (2 1/4") x 280 (11") x 90 (3 1/2")

Weight: 907g (2lbs)

Remote Displays

DxWxH: 71(2 8/10") x 64(2 1/2")  
x 40(1 6/10")

Weight: 110g (3.9oz)



Unistand is not supplied as standard  
XLR cables are not supplied as standard